


VIM-838-DP, VIM-838-2

DIGIT HEIGHT 8.8 mm (0.35")




DRIVER: ICM7232




Pin No.	Segment	Pin No.	Segment	Pin No.	Segment
1	COM 1	11	2A, 2G, 2D	21	5F, 5E, 5AN
2	COM 2	12	2F, 2E, 2AN	22	6B, 6C, 6DP
3	COM 3	13	3B, 3C, 3DP	23	6A, 6G, 6D
4	COM 3	14	3A, 3G, 3D	24	6F, 6E, 6AN
5	COM 2	15	3F, 3E, 3AN	25	7B, 7C, 7DP
6	COM 1	16	4B, 4C, 4DP	26	7A, 7G, 7D
7	1B, 1C, 1DP	17	4A, 4G, 4D	27	7F, 7E, 7AN
8	1A, 1G, 1D	18	4F, 4E, 4AN	28	8B, 8C, 8DP
9	1F, 1E, 1AN	19	5B, 5C, 5DP	29	8A, 8G, 8D
10	2B, 2C, 2DP	20	5A, 5G, 5D	30	8F, 8E, 8AN

VI-602-DP, VI-602-2

DIGIT HEIGHT 12.7 mm (0.5")

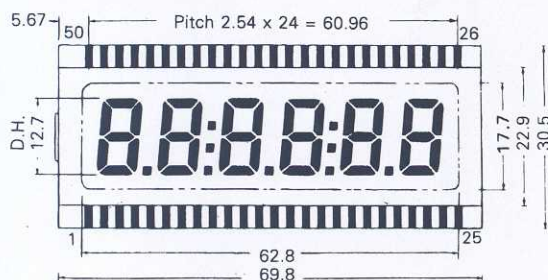


DRIVER: OKI MSM58292, HD61603




Pin No.	Segment	Pin No.	Segment	Pin No.	Segment	Pin No.	Segment
1	COM	11	4D	21	2DP	31	2F
2	6E	12	4C	22	1E	32	2G
3	6D	13	4DP	23	1D	33	L1
4	6C	14	3E	24	1C	34	3B
5	6DP	15	3D	25	1B	35	3A
6	5E	16	3C	26	1A	36	3F
7	5D	17	3DP	27	1F	37	3G
8	5C	18	2E	28	1G	38	4B
9	5DP	19	2D	29	2B	39	4A
10	4E	20	2C	30	2A	40	4F

VIM-606-DP, VIM-606-2

DIGIT HEIGHT 12.7mm (0.5")

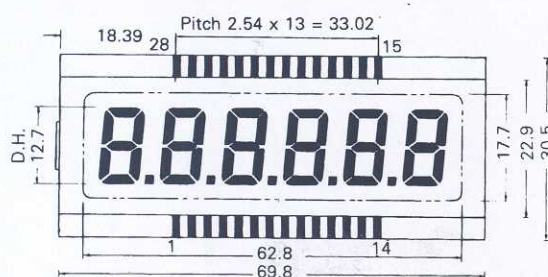

DRIVER: Intersil ICM7231




Pin No.	Segment	Pin No.	Segment	Pin No.	Segment
1	NC	11	NC	21	3F, 3E, NC
2	6B, 6C, 6DP	12	1B, 1C, NC	22	4A, 4G, 4D
3	NC	13	NC	23	4F, 4E, NC
4	5B, 5C, 5DP	14	COM 3	24	5A, 5G, 5D
5	NC	15	COM 1	25	5F, 5E, NC
6	4B, 4C, 4DP	16	1A, 1G, 1D	26	6A, 6G, 6D
7	NC	17	1F, 1E, NC	27	6F, 6E, NC
8	3B, 3C, 3DP	18	2A, 2G, 2D	28	COM 2
9	NC	19	2F, 2E, NC		
10	2B, 2C, 2DP	20	3A, 3G, 3D		

VI-315-DP, VI-315-2

DIGIT HEIGHT 17.8mm (0.7")




DRIVER: Intersil ICL7106, Teledyne 7106




Pin No.	Segment	Pin No.	Segment	Pin No.	Segment	Pin No.	Segment
1	COM	11	3C	21	1A	31	3F
2	NC	12	3DP	22	1F	32	3G
3	B-C	13	2E	23	1G	33	NC
4	NC	14	2D	24	2B	34	NC
5	NC	15	2C	25	2A	35	NC
6	NC	16	2DP	26	2F	36	NC
7	NC	17	1E	27	2G	37	NC
8	4DP	18	1D	28	L	38	NC
9	3E	19	1C	29	3B	39	NC
10	3D	20	1B	30	3A	40	COM

VI-323-DP, VI-323-2

DIGIT HEIGHT 17.8mm (0.7")

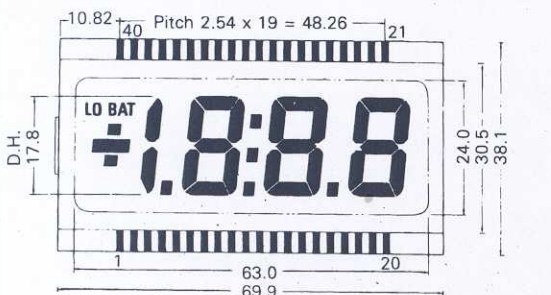

DRIVER: Intersil ICL7106, Teledyne 7106



Pin No.	Segment	Pin No.	Segment	Pin No.	Segment	Pin No.	Segment
1	COM	11	3C	21	1A	31	3F
2	NC	12	3DP	22	1F	32	3G
3	B-C	13	2E	23	1G	33	NC
4	NC	14	2D	24	2B	34	NC
5	NC	15	2C	25	2A	35	NC
6	NC	16	2DP	26	2F	36	NC
7	NC	17	1E	27	2G	37	NC
8	4DP	18	1D	28	L	38	LO BAT
9	3E	19	1C	29	3B	39	NC
10	3D	20	1B	30	3A	40	COM