

Ceramic Surface Mount Frequency Mixer WIDE BAND

SIM-83+

Level 7 (LO Power +7 dBm) 2300 to 8000 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.


Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Outline Drawing

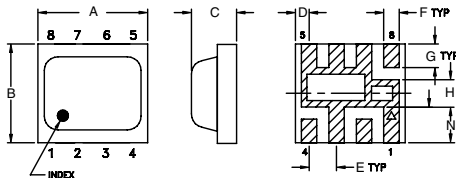

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
0.200	0.180	0.087	0.025	0.050	0.028	0.043
5.08	4.57	2.21	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.0050	.030	0.060	0.238	0.144	0.065	grams
0.13	0.76	1.52	6.05	3.66	1.65	0.08

Demo Board MCL P/N: TB-382 Suggested PCB Layout (PL-239)



NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 2300 to 8000 MHz
- low conversion loss, 6.0 dB typ.
- excellent IF BW, DC to 3000 MHz
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795

Applications

- satellite up and down converters
- defense radar and communications
- line of sight links
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	
LO/RF f _c -f _u								
IF								
2300-8000								
DC-3000								
2300-3200	6.0	0.1	7.8	35	27	23	15	12
3200-3700	5.8	0.1	7.0	31	26	24	18	13
3700-4200	5.9	0.2	7.4	32	26	28	19	15
4200-8000	6.0	0.2	8.9	23	17	18	7	10


1 dB COMPR. +1 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
2300.00	2331.00	6.58	33.75	18.78	2.30	3.23
2500.00	2531.00	6.26	37.97	19.66	2.67	2.46
2700.00	2731.00	5.89	39.45	21.43	2.68	2.07
3000.00	3031.00	5.65	32.22	25.41	2.65	1.93
3300.00	3331.00	5.77	30.68	25.94	2.47	1.94
3600.00	3631.00	5.87	30.39	25.71	2.19	2.14
3900.00	3931.00	6.05	31.52	32.26	2.40	2.43
4200.00	4231.00	6.19	31.06	28.64	3.09	2.54
4500.00	4531.00	6.00	28.97	18.58	2.77	2.60
4800.00	4831.00	6.85	30.21	15.63	4.27	2.62
5100.00	5131.00	6.53	27.21	16.08	3.22	2.80
5400.00	5431.00	5.91	26.54	19.19	2.91	2.93
5700.00	5731.00	5.66	23.69	20.99	2.45	3.38
6000.00	6031.00	5.36	23.52	25.50	1.73	2.68
6500.00	6531.00	5.49	22.36	27.85	1.42	1.31
6900.00	6931.00	5.51	22.41	27.41	1.28	1.12
7300.00	7331.00	5.76	21.74	19.64	1.56	1.88
7600.00	7631.00	6.61	22.46	16.02	2.19	2.56
7800.00	7831.00	6.79	24.63	13.98	2.12	3.07
8000.00	8031.00	7.56	26.32	10.64	2.67	2.95

Electrical Schematic

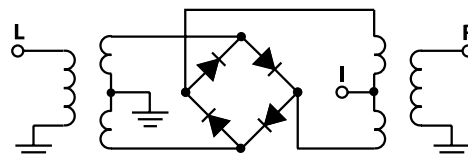

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M105046
SIM-83+
ED-12399/2
DJ/RS/CP
070302
Page 1 of 2

