

Ordering code system



B37923

K

5

100

J

0

60

Packaging

60 $\triangleq$ cardboard tape, 180-mm reel

70 $\triangleq$ cardboard tape, 330-mm reel

Decimal place for cap. values < 10 pF, otherwise not used

Capacitance tolerance

$C_R < 10 \text{ pF}$: $B \hat{=} \pm 0,1 \text{ pF}$ (standard for capacitance values $\leq 3,9 \text{ pF}$)

$C \triangleq \pm 0,25 \text{ pF}$ (standard for capacitance values $\leq 8,2 \text{ pF}$)

$$D \triangleq \pm 0,5 \text{ pF}$$
$$C_B \geq 10 \text{ pF: } F \triangleq \pm 1 \%$$
$$G \triangleq \pm 2\%$$

J $\triangleq$ $\pm$ 5 % (standard)

$$K \triangleq \pm 10\%$$

Capacitance, coded $100 \triangleq \underline{10} \cdot 10^0 \text{ pF} = 10 \text{ pF}$
(example)

Rated voltage	1000 V
---------------	--------

Rated voltage [VDC]	50
Code	5

Termination

Standard: K $\triangleq$ nickel barrier for all case sizes

Type and size

Chip size (inch / mm)	Temperature characteristic HQF
0402 / 1005 0603 / 1608	B37923 B37933

Features

- Ultra-low ESR and high Q factor
- Tight capacitance tolerances
- High stability with respect to time, temperature (T_{CC} : 0 ± 60 ppm/°C), frequency and voltage
- Class 1 characteristic with copper inner electrodes
- Excellent attenuation
- High self-resonant frequency
- Lower power dissipation
- Less energy absorption



Applications

- High-frequency applications
- Matching circuits
- Cellular communication, Bluetooth, DECT
- Cable TV, satellite TV (LNB), GPS
- Filters, RF amplifiers, VCOs

Termination

- For soldering: Nickel-barrier terminations (Ni)

Options

- Alternative capacitance tolerances available on request

Delivery mode

- Cardboard tape, 180-mm and 330-mm reel available

Electrical data

Temperature characteristic		COH	
Climatic category (IEC 60068-1)		55/125/56	
Standard		EIA	
Dielectric		Class 1	
Rated voltage	V_R	50	VDC
Test voltage	V_{test}	$2,5 \cdot V_R/5$ s	VDC
Capacitance range	C_R	0,3 pF ... 82 pF	
Temperature coefficient		$0 \pm 60 \cdot 10^{-6}/K$	
Dissipation factor (limit value)	$\tan \delta$	$< 1,0 \cdot 10^{-3}$	
Insulation resistance ¹⁾ at + 25 °C	R_{ins}	$> 10^5$	MΩ
Insulation resistance ¹⁾ at +125 °C	R_{ins}	$> 10^4$	MΩ
Time constant ¹⁾ at + 25 °C	τ	> 1000	s
Time constant ¹⁾ at +125 °C	τ	> 100	s
Operating temperature range	T_{op}	-55 ... +125	°C
Ageing		none	

1) For $C_R > 10$ nF the time constant $\tau = C \cdot R_{ins}$ is given.




Capacitance tolerances

C_R	$C_R \leq 3,9 \text{ pF}$		$4,7 \text{ pF} \leq C_R \leq 8,2 \text{ pF}$		
Code letter	B (standard)	C	B	C (standard)	D
Tolerance	$\pm 0,1 \text{ pF}$	$\pm 0,25 \text{ pF}$	$\pm 0,1 \text{ pF}$	$\pm 0,25 \text{ pF}$	$\pm 0,5 \text{ pF}$

C_R	$C_R \geq 10 \text{ pF}$			
Code letter	F	G	J (standard)	K
Tolerance	$\pm 1 \%$	$\pm 2 \%$	$\pm 5 \%$	$\pm 10 \%$

Dimensional drawing



Dimensions (mm)

Case size	(inch) (mm)	0402 1005	0603 1608
l		$1,0 \pm 0,1$	$1,6 \pm 0,15$
b		$0,5 \pm 0,05$	$0,8 \pm 0,1$
s		$0,5 \pm 0,05$	$0,8 \pm 0,1$
k		$0,1 - 0,4$	$0,1 - 0,4$


Tolerances to CECC 32101-801

Multilayer Ceramic Capacitors

HQF




Recommended solder pad



Maximum dimensions (mm)

Case size	(inch/mm)	Type	A	C	D
	0402/1005	single chip	0,6	1,7	0,6
	0603/1608	single chip	1,0	3,0	1,0

Termination

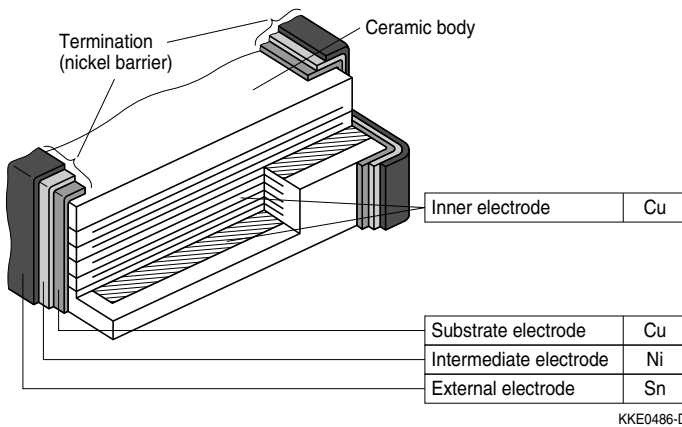



Product range chip capacitors

	HQF			
Size ¹⁾	0402		0603	
inch	1005		1608	
mm				
Type	B37923		B37933	
V_R (VDC)	50		50	
C_R				
0,3 pF				
0,4 pF				
0,5 pF				
0,6 pF				
0,7 pF				
0,8 pF				
0,9 pF				
1,0 pF				
1,2 pF				
1,5 pF				
1,8 pF				
2,2 pF				
2,7 pF				
3,3 pF				
3,9 pF				
4,7 pF				
5,6 pF				
6,8 pF				
8,2 pF				
10 pF				
12 pF				
15 pF				
18 pF				
22 pF				
27 pF				
82 pF				

1) $l \times b$ (inch) / $l \times b$ (mm)

Multilayer Ceramic Capacitors

HQF; 0402

HQF

Ordering codes and packing for HQF capacitors, 50 VDC, nickel-barrier terminations

Case size 0402, 50 VDC

C _R	Ordering code ¹⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** $\triangle$ 60	** $\triangle$ 70
			pcs/reel	pcs/reel
0,3 pF	B37923K5000B3**	0,5 ± 0,05	10000	50000
0,4 pF	B37923K5000B4**	0,5 ± 0,05	10000	50000
0,5 pF	B37923K5000B5**	0,5 ± 0,05	10000	50000
0,6 pF	B37923K5000B6**	0,5 ± 0,05	10000	50000
0,7 pF	B37923K5000B7**	0,5 ± 0,05	10000	50000
0,8 pF	B37923K5000B8**	0,5 ± 0,05	10000	50000
0,9 pF	B37923K5000B9**	0,5 ± 0,05	10000	50000
1,0 pF	B37923K5010B0**	0,5 ± 0,05	10000	50000
1,2 pF	B37923K5010B2**	0,5 ± 0,05	10000	50000
1,5 pF	B37923K5010B5**	0,5 ± 0,05	10000	50000
1,8 pF	B37923K5010B8**	0,5 ± 0,05	10000	50000
2,2 pF	B37923K5020B2**	0,5 ± 0,05	10000	50000
2,7 pF	B37923K5020B7**	0,5 ± 0,05	10000	50000
3,3 pF	B37923K5030B3**	0,5 ± 0,05	10000	50000
3,9 pF	B37923K5030B9**	0,5 ± 0,05	10000	50000
4,7 pF	B37923K5040C7**	0,5 ± 0,05	10000	50000
5,6 pF	B37923K5050C6**	0,5 ± 0,05	10000	50000
6,8 pF	B37923K5060C8**	0,5 ± 0,05	10000	50000
8,2 pF	B37923K5080C2**	0,5 ± 0,05	10000	50000
10 pF	B37923K5100J0**	0,5 ± 0,05	10000	50000
12 pF	B37923K5120J0**	0,5 ± 0,05	10000	50000
15 pF	B37923K5150J0**	0,5 ± 0,05	10000	50000
18 pF	B37923K5180J0**	0,5 ± 0,05	10000	50000
22 pF	B37923K5220J0**	0,5 ± 0,05	10000	50000

1) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 120.


Ordering codes and packing for HQF capacitors, 50 VDC, nickel-barrier terminations
Case size 0603, 50 VDC

C_R	Ordering code ¹⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** $\triangle 60$	** $\triangle 70$
			pcs/reel	pcs/reel
0,4 pF	B37933K5000B4**	0,8 ± 0,1	4000	16000
0,5 pF	B37933K5000B5**	0,8 ± 0,1	4000	16000
0,6 pF	B37933K5000B6**	0,8 ± 0,1	4000	16000
0,7 pF	B37933K5000B7**	0,8 ± 0,1	4000	16000
0,8 pF	B37933K5000B8**	0,8 ± 0,1	4000	16000
0,9 pF	B37933K5000B9**	0,8 ± 0,1	4000	16000
1,0 pF	B37933K5010B0**	0,8 ± 0,1	4000	16000
1,2 pF	B37933K5010B2**	0,8 ± 0,1	4000	16000
1,5 pF	B37933K5010B5**	0,8 ± 0,1	4000	16000
1,8 pF	B37933K5010B8**	0,8 ± 0,1	4000	16000
2,2 pF	B37933K5020B2**	0,8 ± 0,1	4000	16000
2,7 pF	B37933K5020B7**	0,8 ± 0,1	4000	16000
3,3 pF	B37933K5030B3**	0,8 ± 0,1	4000	16000
3,9 pF	B37933K5030B9**	0,8 ± 0,1	4000	16000
4,7 pF	B37933K5040C7**	0,8 ± 0,1	4000	16000
5,6 pF	B37933K5050C6**	0,8 ± 0,1	4000	16000
6,8 pF	B37933K5060C8**	0,8 ± 0,1	4000	16000
8,2 pF	B37933K5080C2**	0,8 ± 0,1	4000	16000
10 pF	B37933K5100J0**	0,8 ± 0,1	4000	16000
12 pF	B37933K5120J0**	0,8 ± 0,1	4000	16000
15 pF	B37933K5150J0**	0,8 ± 0,1	4000	16000
18 pF	B37933K5180J0**	0,8 ± 0,1	4000	16000
22 pF	B37933K5220J0**	0,8 ± 0,1	4000	16000
27 pF	B37933K5270J0**	0,8 ± 0,1	4000	16000
82 pF	B37933K5820J0**	0,8 ± 0,1	4000	16000

1) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 120.

Multilayer Ceramic Capacitors

HQF; 0402

HQF

Typical RF performance for HQF capacitors, case size 0402, 50 VDC

Capacitance pF	$f_{\text{res}}^{1)}$ MHz	$ESR @ 1 \text{ GHz}^{2)}$ m Ω	$Q @ 1 \text{ GHz}^{2)}$	$ESR @ f_{\text{res}}^{2)}$ m Ω
0,3	23400	560	920	710
0,4	20350	490	805	605
0,5	19700	440	720	535
0,6	17400	405	650	485
0,7	15100	375	600	445
0,8	14450	355	560	415
0,9	12600	335	520	385
1,0	12000	320	490	365
1,2	10600	295	440	330
1,5	8900	265	390	290
1,8	7100	245	350	265
2,2	6400	225	310	235
2,7	6000	205	275	210
3,3	5500	185	245	190
3,9	5350	170	225	175
4,7	4650	155	200	155
5,6	3950	145	175	140
6,8	4100	130	155	125
8,2	3650	120	140	115
10	3350	110	120	105
12	3350	102	104	94
15	2600	92	88	82
18	2300	84	70	74
22	2200	78	56	66

1) Measured with impedance analyser E 4991A, parts not soldered.

2) Measured with network analyser HP 8753D, parts soldered.



Typical RF performance for HQF capacitors, case size 0603, 50 VDC

Capacitance pF	$f_{\text{res}}^{1)}$ MHz	$ESR @ 1 \text{ GHz}^{2)}$ m Ω	$Q @ 1 \text{ GHz}^{2)}$	$ESR @ f_{\text{res}}^{2)}$ m Ω
0,4	17800	445	860	595
0,5	17100	400	805	540
0,6	13600	385	755	510
0,7	12200	345	635	440
0,8	11400	325	595	410
0,9	10600	315	560	390
1,0	9600	300	525	365
1,2	8800	275	455	335
1,5	7900	250	395	300
1,8	6900	240	360	285
2,2	5750	215	305	250
2,7	5100	200	270	235
3,3	4700	185	235	210
3,9	4150	175	210	200
4,7	3550	165	185	185
5,6	3130	150	160	170
6,8	2850	140	135	155
8,2	2730	130	115	140
10	2580	120	96	130
12	2400	110	76	118
15	2150	102	62	108
18	2050	96	50	100
22	1870	88	34	90
27	1780	80	26	82


Capacitance pF	$f_{\text{res}}^{1)}$ MHz	$ESR @ 300 \text{ MHz}^{2)}$ m Ω	$Q @ 300 \text{ MHz}^{2)}$	$ESR @ f_{\text{res}}^{2)}$ m Ω
82	930	52	105	52

1) Measured with impedance analyser E 4991A, parts not soldered.


2) Measured with network analyser HP 8753D, parts soldered.

Typical characteristics for chip size 0402


ESR versus capacitance C
(for not soldered parts)

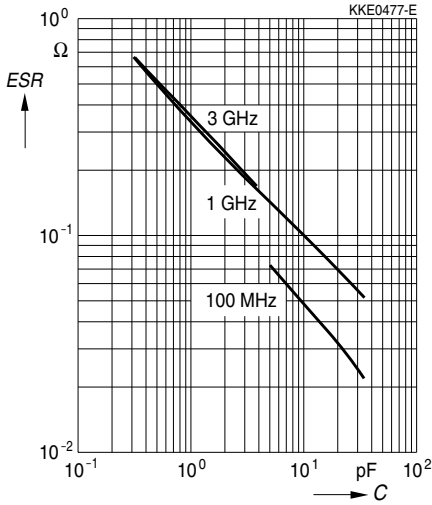


ESR versus capacitance C
at self-resonant frequency (for soldered parts)

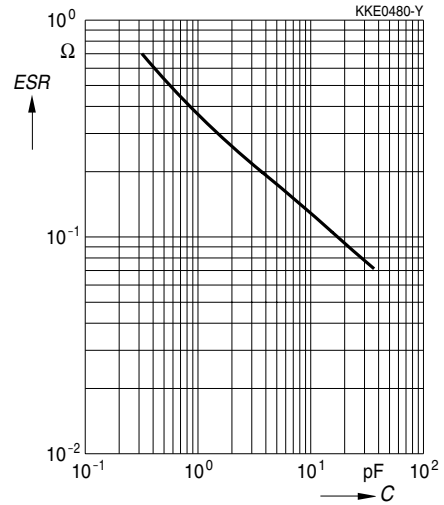

ESR versus frequency f

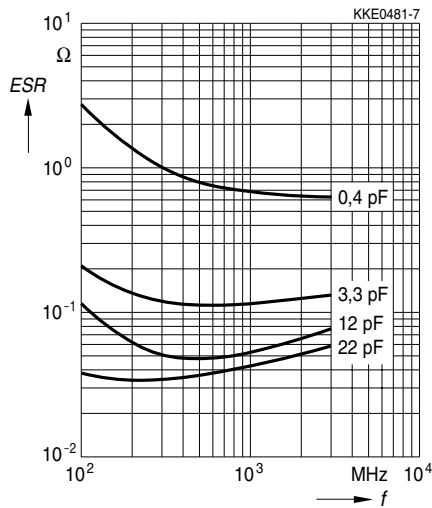


Self-resonant frequency f_{res} versus
capacitance C

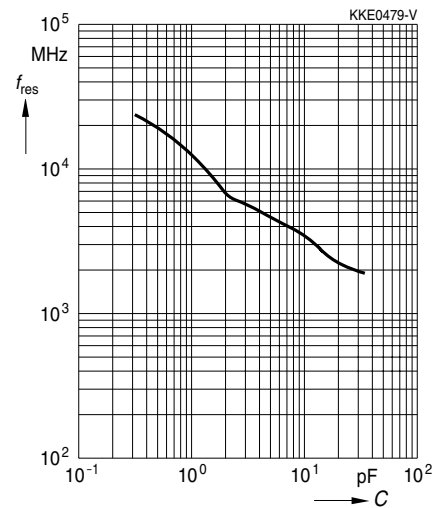


Typical characteristics for chip size 0402

Q factor versus
capacitance C

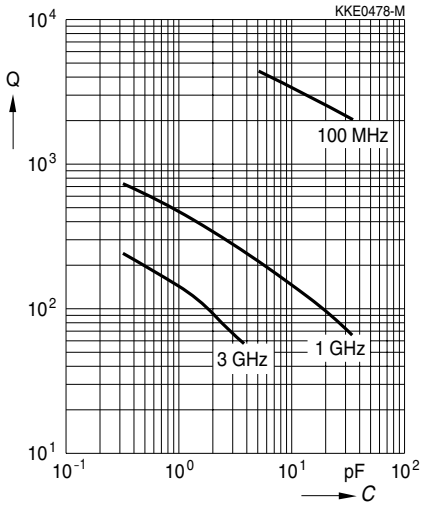


Q factor versus
frequency f

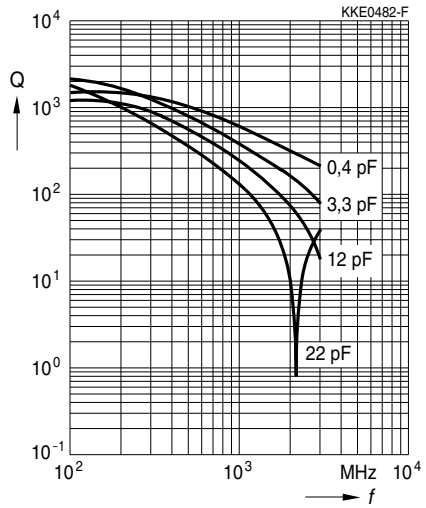


Typical characteristics for chip size 0603


ESR versus capacitance C
(for not soldered parts)

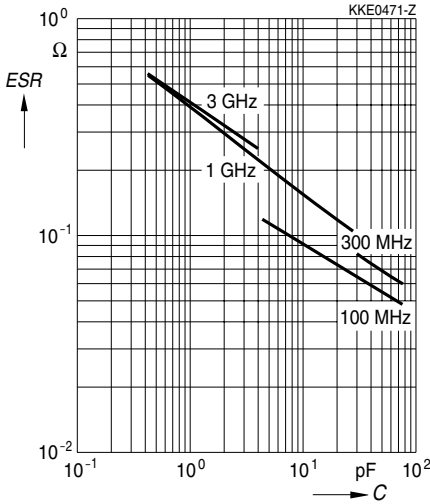


ESR versus capacitance C
at self-resonant frequency (for soldered parts)

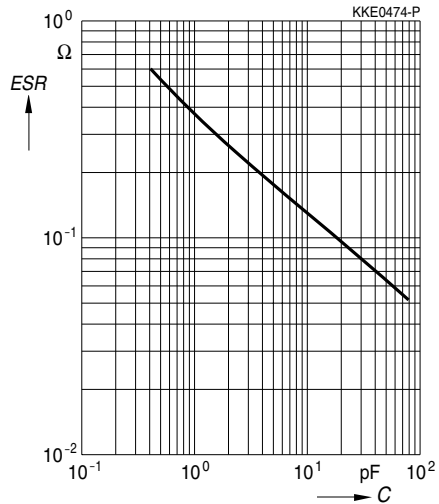

ESR versus frequency f

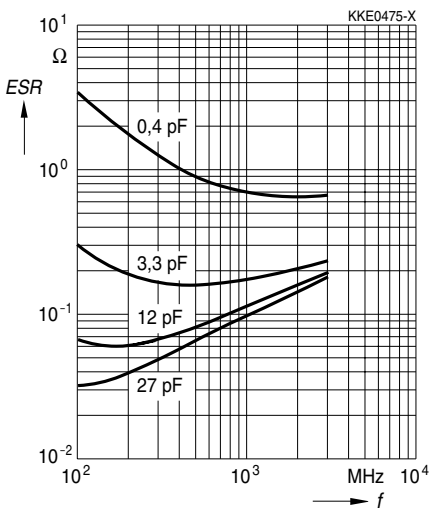


Self-resonant frequency f_{res} versus
capacitance C

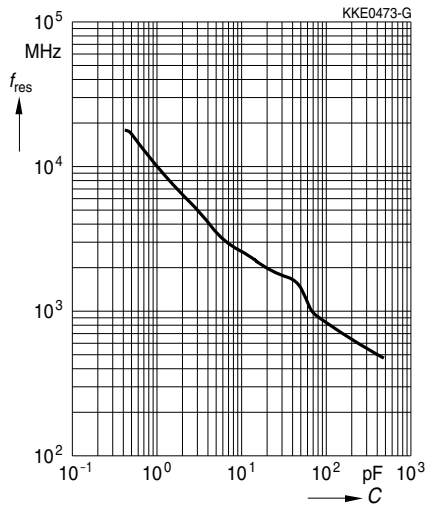


Typical characteristics for chip size 0603

Q factor versus
capacitance C

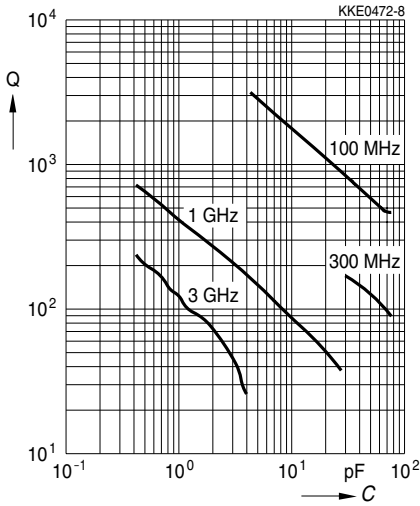

Q factor versus
frequency f

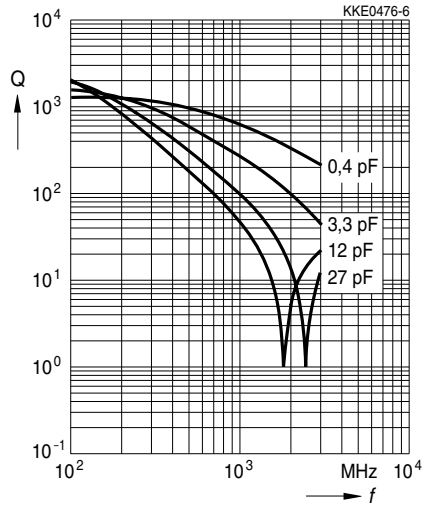

Herausgegeben von EPCOS AG**Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND****☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG**Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY****☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.