


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	ECR-14-005828	08MAY14	SS	TM

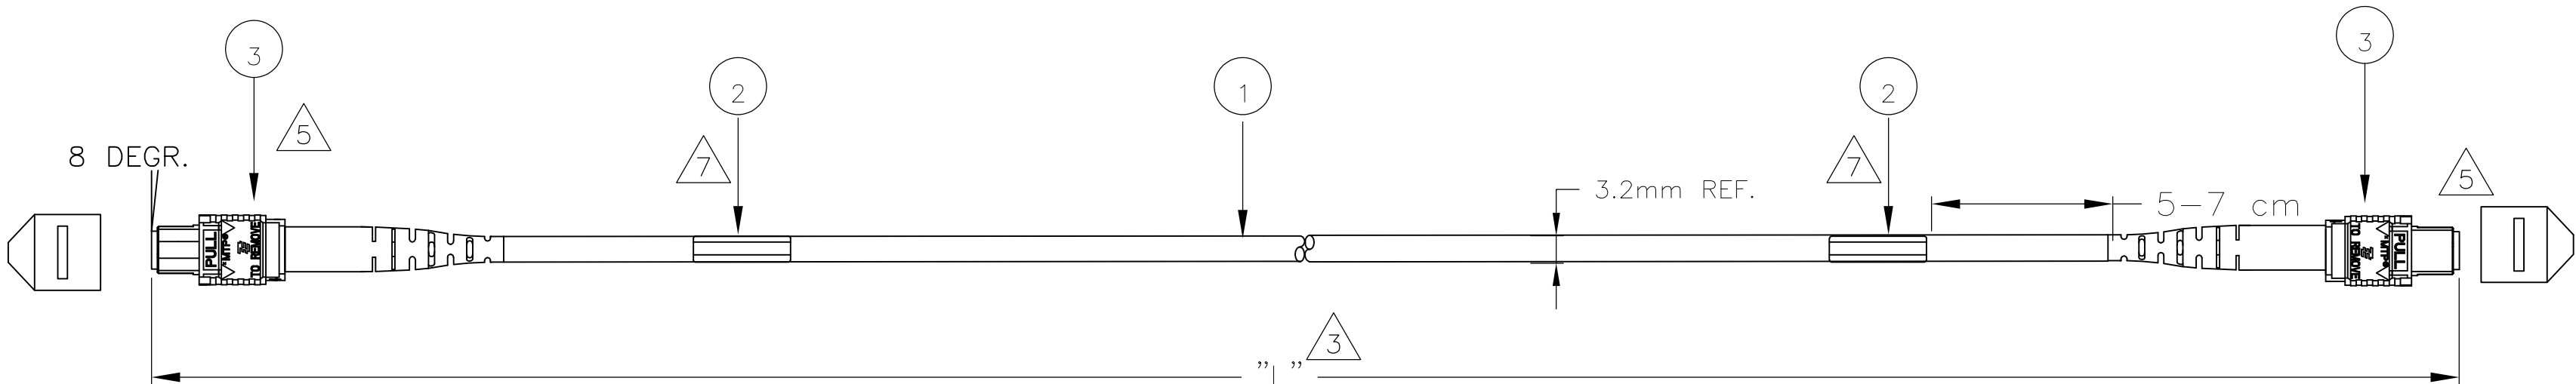


NOTES:

- 1
- MPO : ANGLED 8 DEGREES ON BOTH CONNECTORS
ATTENUATION ≤ 0,60 dB MEASURED AT 1310/1550 nm ACC. IEC 61300-3-4 METHOD B
WITH MODAL CONDITION ACC. IS 14763-3, OFSTP-14, IEC 61280-4
+ CABLE LOSS, ACC. TO DRAWING 2055703
- 2
- RETURN LOSS ≥ 45 dB MEASURED IN MATED CONDITION AGAINST REF. CONNECTOR AT 1310/1550 nm
- 3
- TOLERANCE OVERALL LENGTH "L" ACC. TO PROD. DRWG 2160070
- SPECIFIED LENGTH WILL BE FROM TIP CONNECTOR TILL TIP CONNECTOR.
- 4
- TEST RESULT SHEET PACKAGED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 5
- WHITE MARK ON CONNECTOR HOUSING INDICATES FIBER ONE SIDE.
- 6
- PACKAGING :
- PACKAGED IN A CARTON BOX
- 7
- LABEL INFORMATION:
-UNIQUE SERIAL NUMBER
-TE PART NUMBER
-CABLE LENGTH ("L")
-WIRE MAP
- 8
- CABLE INFORMATION:
-CORE DIAMETER: 9/125 μm (OS2)
-OUTER CABLE DIAMETER: 3.2 mm.
-OUTER CABLE COLOR: YELLOW.
-OUTER CABLE MATERIAL: LSZH (LOW SMOKE ZERO HALOGEN).
-CABLE LOSS 0.5/0.4 dB/km AT 1310-1550 nm.

0.5/80 METER LENGTHS ACCORDING TO PRODUCT DRAWING 2160070	
PART NUMBER	"L" (meter)
X-2160137-Y	XY,0

FIBER PATH STRAIGHT		
MPO		MPO
1	↔	1
2	↔	2
3	↔	3
4	↔	4
5	↔	5
6	↔	6
7	↔	7
8	↔	8
9	↔	9
10	↔	10
11	↔	11
12	↔	12

2	MPO CONNECTORS	3
2	INFORMATION LABELS	2
L	FOCAB SM OS2 12FOLD LSZH YELLOW	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.VD MEULEN 01JUN2012		 TE Connectivity	
		CHK T.VD MEULEN 01JUN2012			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PATCH LEAD SM OS2 12 FOLD MPO-FEMALE/ MPO-FEMALE STRAIGHT	
		APVD M. OPPERS 01JUN2012			
		PRODUCT SPEC —		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		APPLICATION SPEC —			
MATERIAL —		FINISH —		A2 00779 C-2160137 —	
CUSTOMER DRAWING				SCALE NTS SHEET 1 of 1 REV B	