

Rittal – The System.

Faster – better – everywhere.

 **for TS, SE, CM – TS**
4398.000

Date : Mar 19, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



for TS, SE, CM – TS 4398.000

created: 19.03.2018 build on www.rittal.com/us-en

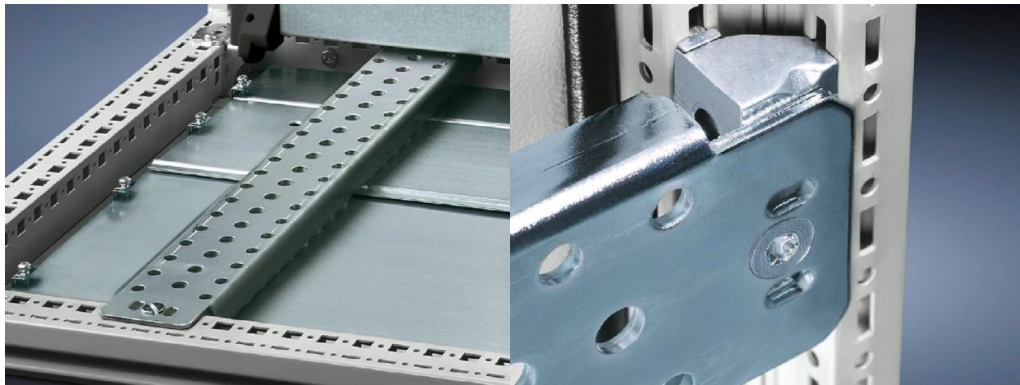

Product description

Version:	Slotted
Description:	For heavy installed equipment. Particularly suitable for the installation of post isolators.
Material:	Carbon steel
Surface finish:	Zinc-plated
Supply includes:	Assembly components

Product features

Suitable for:	Enclosure type: TS 8 Enclosure type: SE Enclosure type: CM Width: 800 mm (31 ") Depth: 800 mm (31 ")
Installation options:	On the vertical TS, SE enclosure section via snap-on nuts 8800.806 or via adapter rail for PS compatibility, offset in the height, via TS punched rail 25 x 38 mm On the horizontal TS enclosure section: in the width, in the depth in the case of SE, may additionally be fitted to the horizontal section in the width at the bottom and top, or in the depth at the top using snap-on nut 8800.808 On base configuration rail for CM
Packaging unit:	4 pc(s).
Weight/packaging unit:	8.88 kg (19.6 lb.)

EAN: 4028177100411

Customs tariff number: 73269098

ETIM 6.0: EC001285

ETIM 5.0: EC001285

eCl@ss 8.0/8.1: 27189261

eCl@ss 7.0/7.1: 23159101

eCl@ss 6.0/6.1: 23159101

eCl@ss 5.1/5.1.4: 27189250

Product description (long): TS Support rail, for TS, SE, CM, for W/D: 800 mm, slotted