

IH5009-12, IH5014, IH5016-20, IH5022, IH5024

Virtual Ground Analog Switch

The IH5009 series of analog switches were designed to fill the need for an easy-to-use, inexpensive switch for both industrial and military applications. Although low cost is a primary design objective, performance and versatility have not been sacrificed.

Each package contains up to four channels of analog gating and is designed to eliminate the need for an external driver. The odd numbered devices are designed to be driven directly from TTL open collector logic (15 volts) while the even numbered devices are driven directly from low level TTL logic (5 volts). Each channel simulates a SPDT switch. SPST switch action is obtained by leaving the diode cathode unconnected; for SPDT action, the cathode should be grounded (0V).

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.


HARRIS
SEMICONDUCTOR

IH5009-5012, 5014, 5016-5020, 5022, 5024 Virtual Ground Analog Switch

GENERAL DESCRIPTION

The IH5009 series of analog switches were designed to fill the need for an easy-to-use, inexpensive switch for both industrial and military applications. Although low cost is a primary design objective, performance and versatility have not been sacrificed.

Each package contains up to four channels of analog gating and is designed to eliminate the need for an external driver. The odd numbered devices are designed to be driven directly from TTL open collector logic (15 volts) while the even numbered devices are driven directly from low level TTL logic (5 volts). Each channel simulates a SPDT switch. SPST switch action is obtained by leaving the diode cathode unconnected; for SPDT action, the cathode should be grounded (0V). The parts are intended for high performance multiplexing and commutating usage. A logic "0" turns the channel ON and a logic "1" turns the channel OFF.


ORDERING INFORMATION

Basic Part Number	Channels	Logic Level	Packages
IH5009	4	+15	DD,PD
IH5010	4	+5	DD,PD
IH5011	4	+15	DE,PE
IH5012	4	+5	DE,PE
IH5014	3	+5	DD,PD
IH5016	3	+5	DE,PE
IH5017	2	+15	DD,PA
IH5018	2	+5	DD,PA
IH5019	2	+15	DE,PA
IH5020	2	+5	DE,PA
IH5022	1	+5	DD,PA
IH5024	1	+5	DE,PA

NOTE: Military temperature range (-55°C to +125°C) available in ceramic packages only.

FEATURES

- Switches Analog Signals Up to 20 Volts Peak-to-Peak
- Each Channel Complete - Interfaces With Most Integrated Logic
- Switching Speeds Less Than 0.5μs
- $I_{D(OFF)}$ Less Than 500pA Typical at 70°C
- Effective $r_{ds(ON)}$ - 5Ω to 50Ω
- Commercial and Military Temperature Range Operation

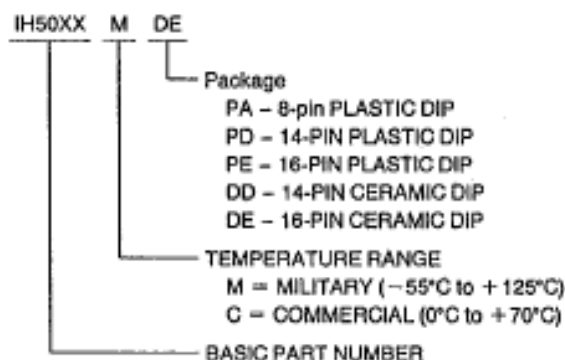

HARRIS SEMICONDUCTOR'S SOLE AND EXCLUSIVE WARRANTY OBLIGATION WITH RESPECT TO THIS PRODUCT SHALL BE THAT STATED IN THE WARRANTY ARTICLE OF THE CONDITION OF SALE. THE WARRANTY SHALL BE EXCLUSIVE AND SHALL BE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE.

NOTE: All typical values have been characterized but are not tested.

IH5009-5012, 5014, 5016-5020, 5022, 5024


ABSOLUTE MAXIMUM RATINGS

Positive Analog Signal Voltage	30V
Negative Analog Signal Voltage	-15V
Diode Current	10mA
Power Dissipation (Note)	500mW
Storage Temperature	-65°C to +150°C

Lead Temperature (Soldering, 10sec)	300°C
Operating Temperature	
5009C Series	0°C to +70°C
5009M Series	-55°C to +125°C
Lead Temperature (Soldering, 10sec)	300°C

NOTE: Dissipation rating assumes device is mounted with all leads welded or soldered to printed circuit board in ambient temperature below 75°C. For higher temperature, derate at rate of 5m/W°C.


NOTE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

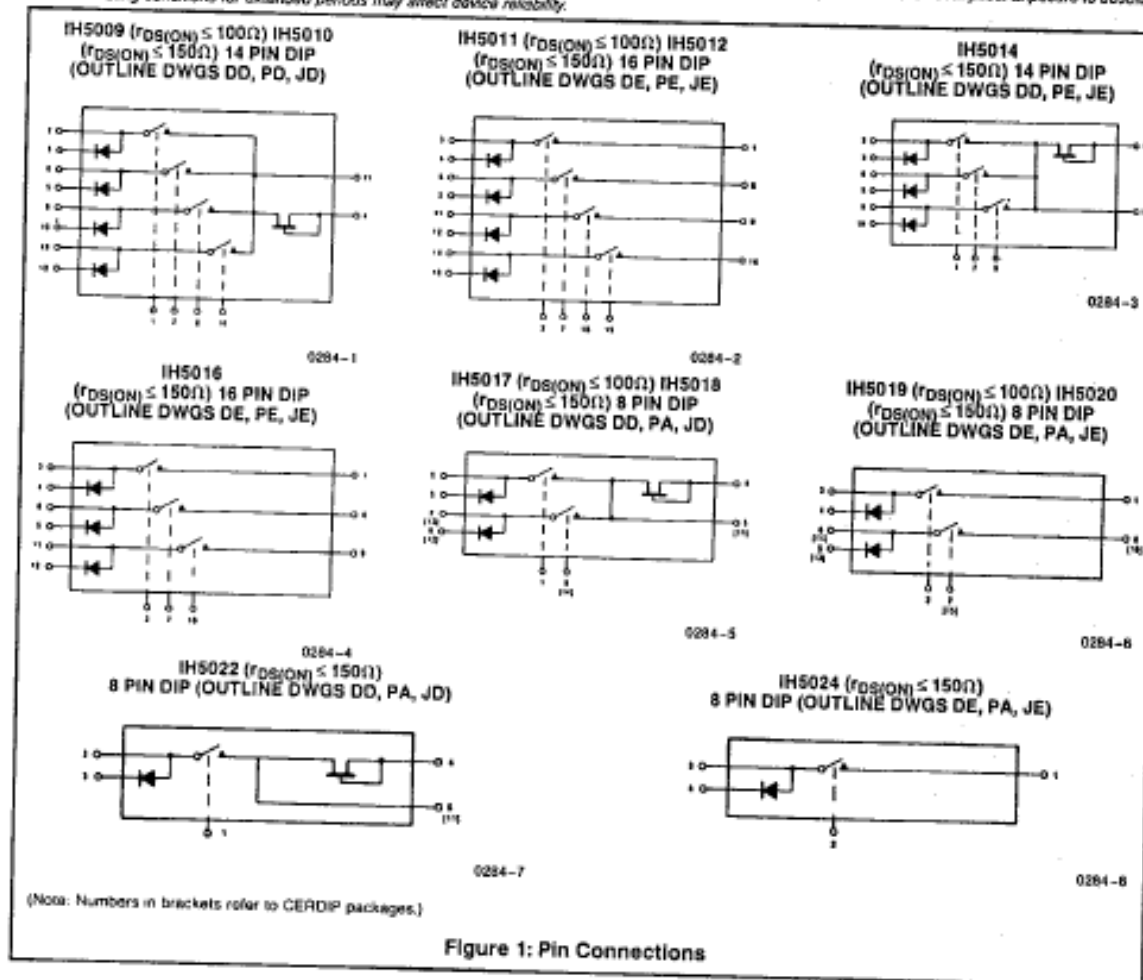

NOTE: All typical values have been characterized but are not tested.

IH5009-5012, 5014, 5016-5020, 5022, 5024

T-51-11

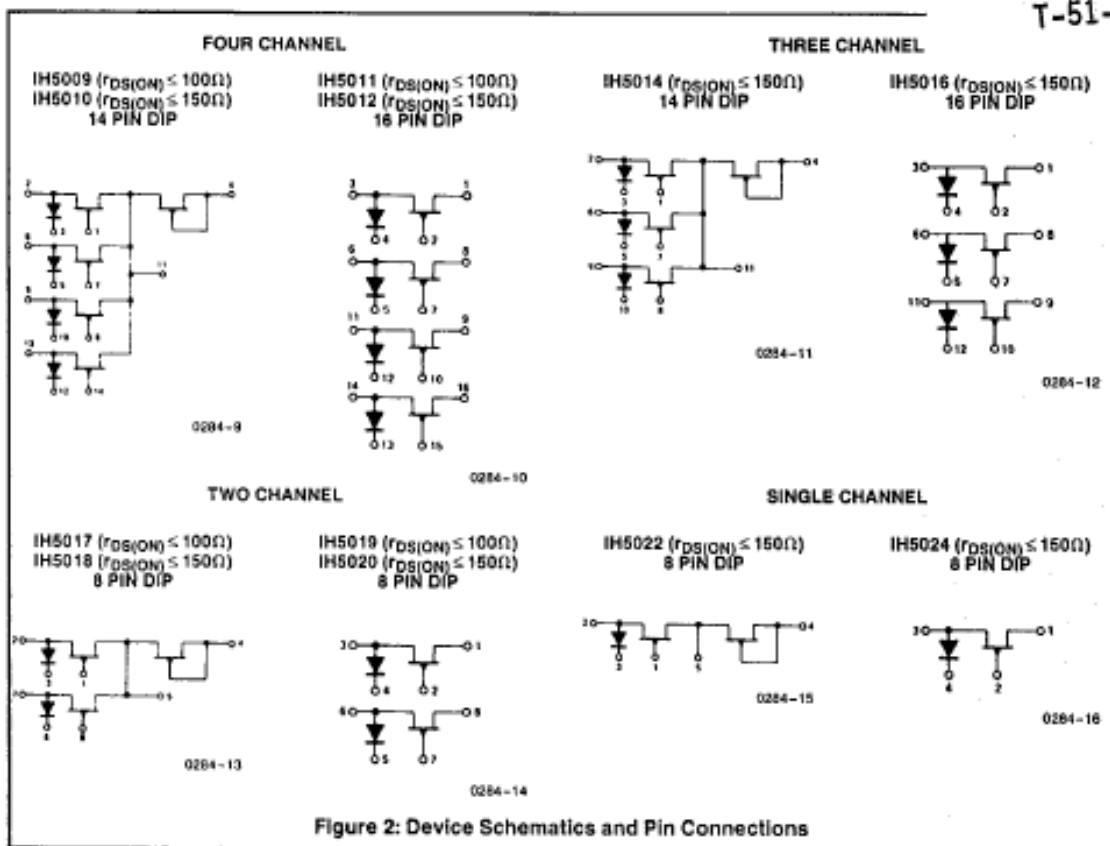

NOTE: All typical values have been characterized but are not tested.

IH5009-5012, 5014, 5016-5020, 5022, 5024


ELECTRICAL CHARACTERISTICS (per channel)

T-51-11

Symbol (Note 1)	Characteristic	Type (Note 4)	TEST Conditions (Note 2)	Specification Limit				Units
				-55°C (M) 0°C (C) Min/Max	25°C		+125°C (M) +70°C (C) Min/Max	
					Typ	Min/Max		
I _{IN(ON)}	Input Current-ON	ALL	V _{IN} = 0V, I _D = 2mA		0.01	±0.5	100	μA
I _{IN(OFF)}	Input Current-OFF	5V Logic Ckts	V _{IN} = +4.5V, V _A = ±10V		0.04	±0.5	20	nA
I _{IN(OFF)}	Input Current-OFF	15V Logic Ckts	V _{IN} = +11V, V _A = ±10V		0.04	±0.5	20	nA
V _{IN(ON)}	Channel Control Voltage-ON	5V Logic Ckts	See Figure 7, Note 3	0.5		0.5	0.5	V
V _{IN(ON)}	Channel Control Voltage-ON	15V Logic Ckts	See Figure 8, Note 3	1.5		1.5	1.5	V
V _{IN(OFF)}	Channel Control Voltage-OFF	5V Logic Ckts	See Figure 8, Note 3			4.5	4.5	V
V _{IN(OFF)}	Channel Control Voltage-OFF	15V Logic Ckts	See Figure 8, Note 3			11.0	11.0	V
I _{D(OFF)}	Leakage Current-OFF	5V Logic Ckts	V _{IN} = +4.5V, V _A = ±10V		0.02	±0.5	20	nA
I _{D(OFF)}	Leakage Current-OFF	15V Logic Ckts	V _{IN} = +11V, V _A = ±10V		0.02	±0.5	20	nA
I _{D(ON)}	Leakage Current-ON	5V Logic Ckts	V _{IN} = 0V, I _S = 1mA		0.30	±1.0	1000 (M) 200 (C)	nA
I _{D(ON)}	Leakage Current-ON	15V Logic Ckts	V _{IN} = 0V, I _S = 1mA		0.10	±0.5	500 (M) 100 (C)	nA
I _{D(ON)}	Leakage Current-ON	5V Logic Ckts	V _{IN} = 0V, I _S = 2mA			1.0	10	μA
I _{D(ON)}	Leakage Current-ON	15V Logic Ckts	V _{IN} = 0V, I _S = 2mA			2.0	100	μA
r _{DS(ON)}	Drain-Source ON-Resistance	5V Logic Ckts	I _D = 2mA, V _{IN} = 0.5V	150	80	150	385 (M) 240 (C)	Ω
r _{DS(ON)}	Drain-Source ON-Resistance	15V Logic Ckts	I _D = 2mA, V _{IN} = 1.5V	100	80	100	250 (M) 160 (C)	Ω
t _(on)	Turn-ON Time	All	See Figures 5 & 6		150	500		ns
t _(off)	Turn-OFF Time	All	See Figures 5 & 6		300	500		ns
CT	Cross Talk	All	f = 100Hz		120			dB


- NOTES: 1. (OFF) and (ON) subscript notation refers to the conduction state of the FET switch for the given test.
 2. Refer to Figure 2 for definition of terms.
 3. $V_{IN(ON)}$ and $V_{IN(OFF)}$ are test conditions guaranteed by the tests of $r_{DS(ON)}$ and $I_{D(OFF)}$ respectively.
 4. "5V Logic CKTS" applies to even-numbered devices. "15V Logic CKTS" applies to odd-numbered devices.

NOTE: All typical values have been characterized but are not tested.

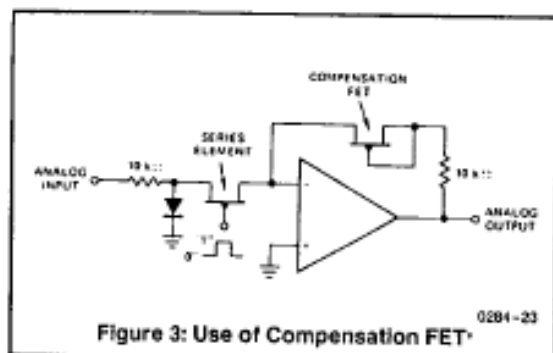

Clearly, the gain error caused by the switch is dependent on the match between the FETs rather than the absolute value of the FET on-resistance. For the standard product, all the FETs in a given package are guaranteed to match within 50Ω. Selections down to 5Ω are available however. Contact factory for details. Since the absolute value of $r_{DS(on)}$ is guaranteed only to be less than 100Ω or 150Ω, a substantial improvement in gain accuracy can be obtained by using the compensating FET.

DEFINITION OF TERMS

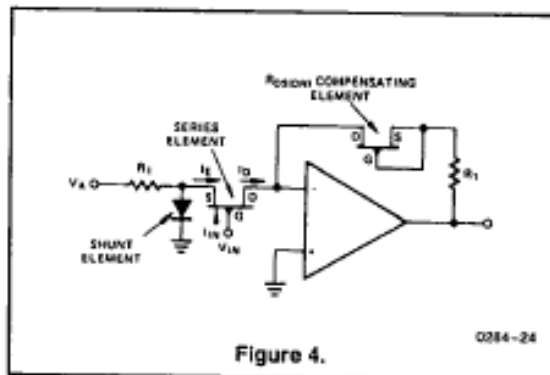

NOISE IMMUNITY

The advantage of SPDT switching is high noise immunity when the series elements is OFF. For example, if a $\pm 10V$ analog input is being switched by TTL open collector logic, the series switch is OFF when the logic level is at +15 volts. At this time, the diode conducts and holds the source at approximately +0.7 volts with an AC impedance to ground of 25 ohms. Thus random noise superimposed on the +10 volt analog input will not falsely trigger the FET since the noise voltage will be shunted to ground.

When switching a negative voltage, the input further increases the OFF voltage beyond pinch-off, so there is no danger of the FET turning on.

SWITCHING CHARACTERISTICS

T-51-11

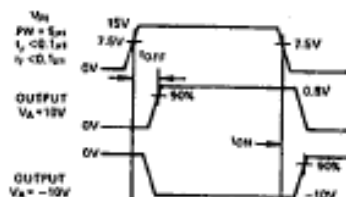



Figure 5: High Level Logic




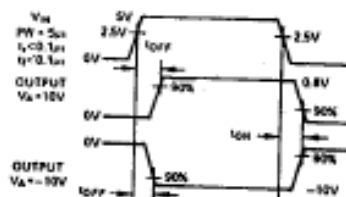


Figure 6: Standard DTL, TTL, RTL



IH5009-5012, 5014, 5016-5020, 5022, 5024

LOGIC INTERFACE CIRCUITS

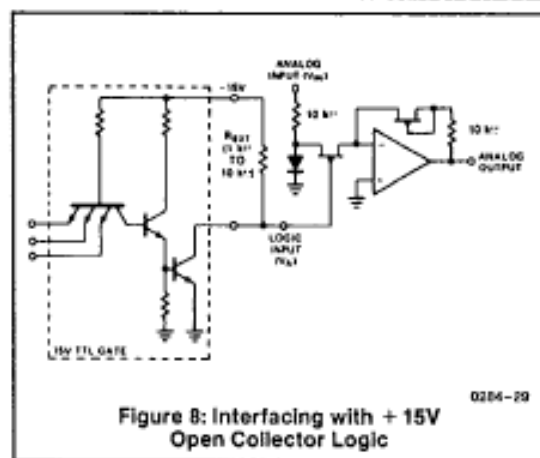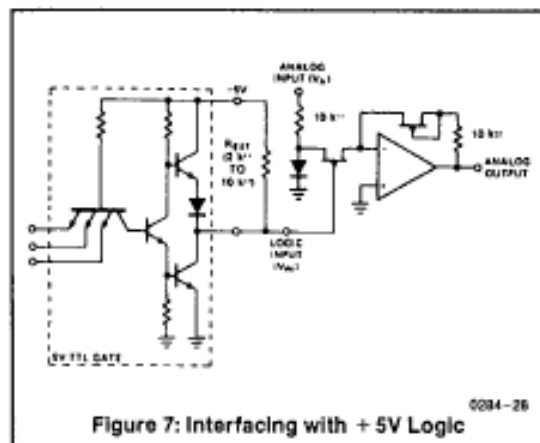

APPLICATIONS (Note)

T-51-11

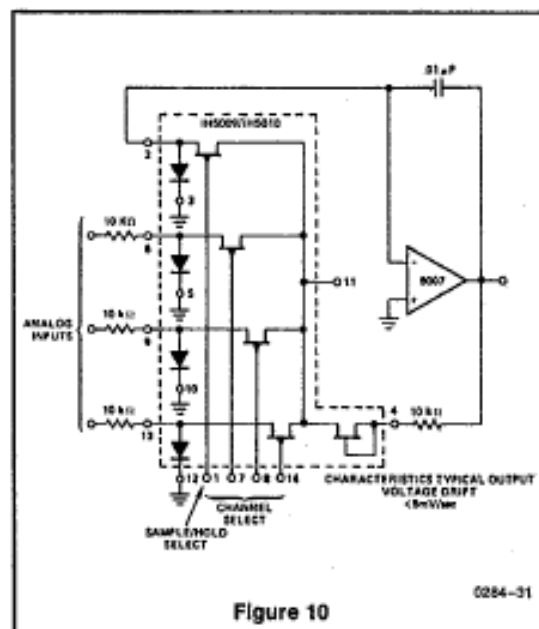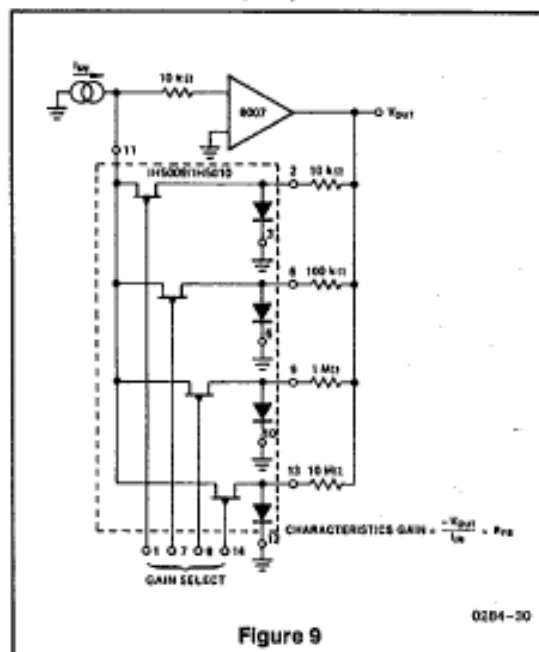

NOTE: Additional applications information is given in Application Bulletins A003 "Understanding and Applying the Analog Switch" and A004 "The 5009 Series of Low Cost Analog Switches".

NOTE: All typical values have been characterized but are not tested.