


		1	
Part Number:		DRAWN	E /20 /2010
IE122312-3		CJ	5/20/2019
	312-3	CHECKED	5/21/2019
		C.H.	3,21,2013
Description: Floctro-Mocha	nical Indicator	APPROVED	5/21/2019
Liecti 0-Mecha	iriicai Iriulcatoi	C.E.	3,21,2019

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Top View

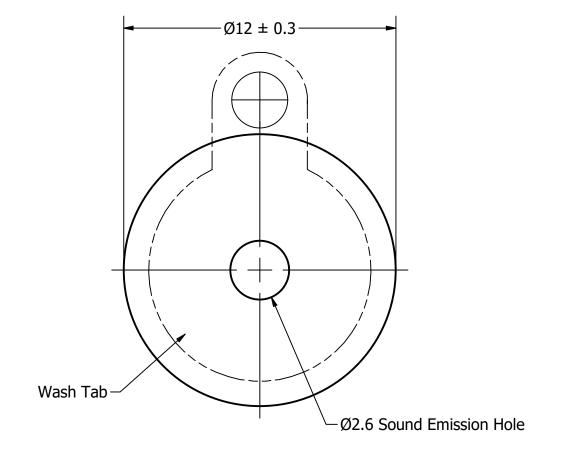


PBT

1.8


Housing Material

Weight

Side View

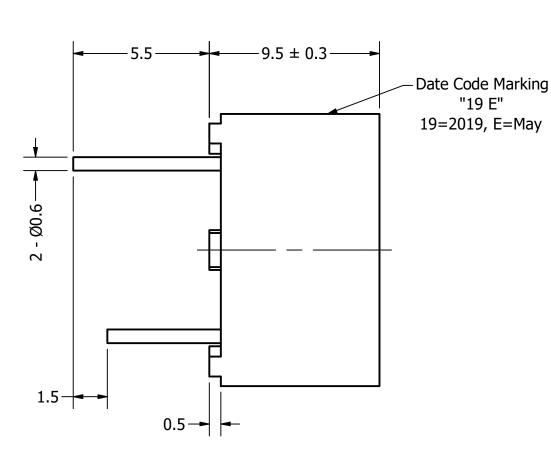

Bottom View

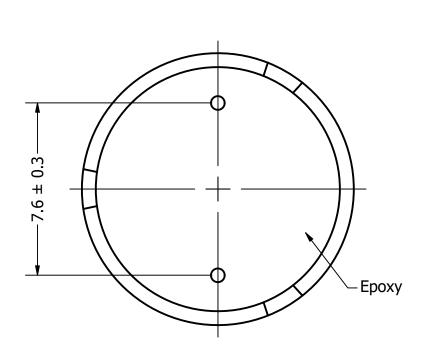

3) All parts meet RoHS

4) Subject to change or redrawn without notice

Items	Specifications	Conditions					
Min. Sound Pressure Level	85	dB (@ 10cm)	REVISION HISTORY				
Tone	Single		REV	DESCRIPTION	DATE	APPROVED	
Resonant Frequency	2,300	Hz		Released from Engineering	10/21/0213	J.S.	
Rated Voltage	12	V	1	Updated drawing template, temps, voltage range,	5/21/2019	C.E.	
Voltage Range	8 ~ 16	V		diameter, pin length, housing, weight			
Max. Rated Current	30	mA	2	2	Updated SPL, diameter, length, wash tab, added	9/22/2022	P.D.
Storage Temperature	-40 ~ +90	°C		tolerances	3/22/2022	Ρ.υ.	
Operating Temperature	-40 ~ +85	°C	NOTES				
Connection Method	PC Pins		1) All dimensions are in mm unless otherwise noted				
Mount Type	Thru Hole		2) All tolerances are ± 0.5 mm unless otherwise noted				