

Frequency Mixer WIDE BAND

SIM-43+

Level 7 (LO Power +7 dBm) 750 to 4200 MHz



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.


Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Outline Drawing

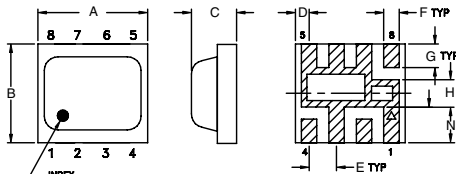

PCB Land Pattern


Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
0.200	0.180	0.087	0.025	0.050	0.028	0.043
5.08	4.57	2.21	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.0050	.030	0.060	0.238	0.144	0.065	grams
0.13	0.76	1.52	6.05	3.66	1.65	0.08

Demo Board MCL P/N: TB-382

Suggested PCB Layout (PL-239)

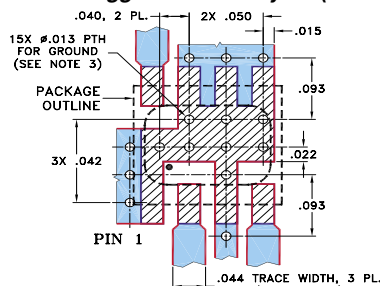

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. THE PLATED THROUGH VIA HOLES IN THE PCB GROUND PAD SHALL BE PLUGGED. IF VIA HOLES CANNOT BE PLUGGED, IT IS RECOMMENDED TO CAP THE VIAS WITH SOLDER MASK ON THE BACK SIDE OF THE BOARD.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 750 to 4200 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795

Applications

- cellular
- defense & weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _L -f _U	IF	Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
750-4200	DC-1500								
750-2500		6.3	0.1	7.8	37	30	24	11	12
2500-4200		5.7	0.1	8.6	32	25	20	14	12


1 dB COMPR. +1 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
740.00	771.00	6.73	40.31	25.02	2.11	7.97
800.00	831.00	6.20	37.61	24.68	1.71	5.22
900.00	931.00	6.25	36.50	25.33	1.97	3.55
1000.00	1031.00	6.90	40.60	26.55	2.89	2.05
1200.00	1231.00	6.41	42.66	31.50	3.33	1.04
1400.00	1431.00	6.28	37.92	37.58	3.68	1.43
1600.00	1631.00	6.31	36.81	32.80	3.47	2.14
1800.00	1831.00	6.66	38.10	22.63	3.57	2.37
2000.00	2031.00	6.62	37.15	16.13	3.31	1.77
2200.00	2231.00	6.28	36.38	17.49	3.06	1.88
2400.00	2431.00	5.55	35.98	20.30	2.29	2.02
2700.00	2731.00	5.33	33.12	24.66	2.02	1.74
3000.00	3031.00	5.07	31.91	29.23	1.29	1.35
3200.00	3231.00	5.35	31.77	28.40	1.24	1.20
3400.00	3431.00	5.63	31.28	23.23	1.55	1.18
3800.00	3831.00	6.25	29.57	20.18	2.67	1.89
3900.00	3931.00	6.58	30.95	20.66	3.40	2.29
4000.00	4031.00	6.97	32.47	19.31	3.53	2.54
4100.00	4131.00	7.20	31.49	18.27	3.74	3.00
4200.00	4231.00	7.37	32.50	17.81	4.17	3.91

Electrical Schematic

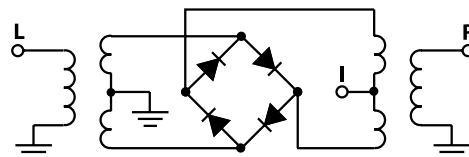

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M105046
SIM-43
ED-12399/1
DJ/RS/CP
070119
Page 1 of 2

