


1

2


3

4


5

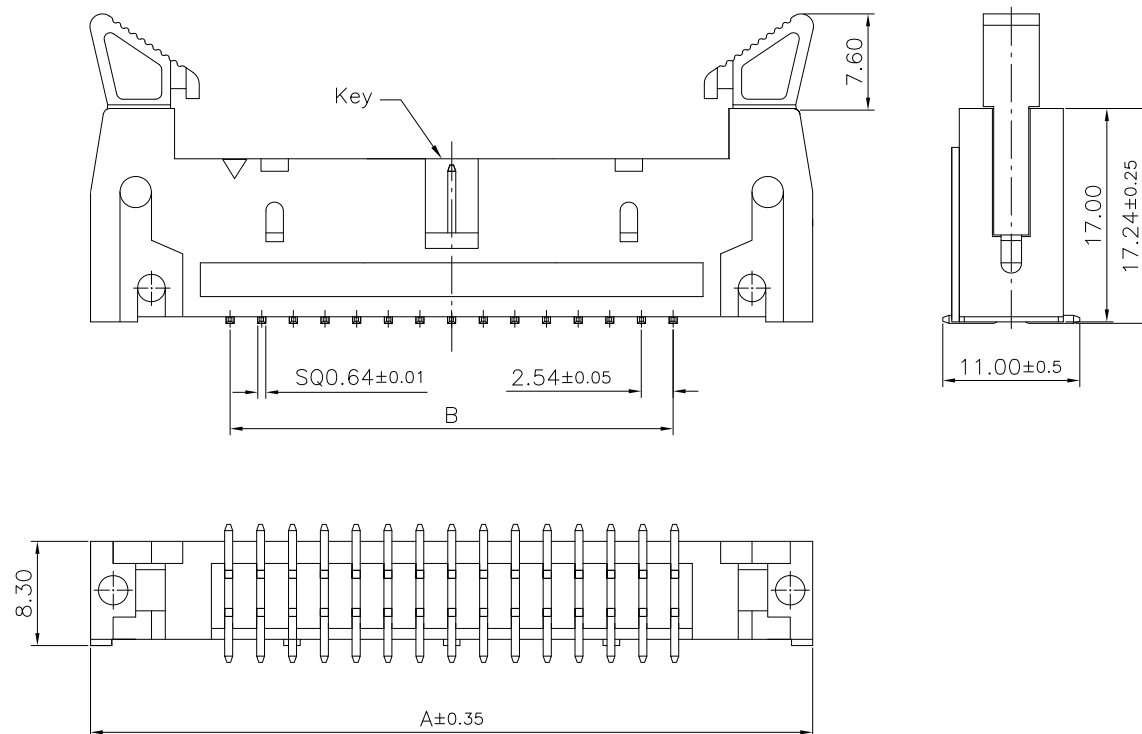

MATING PART
3030-XX-0102-00

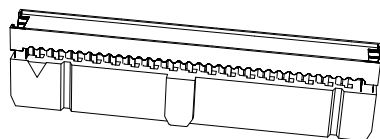

MATING PART
3030-XX-0101-00

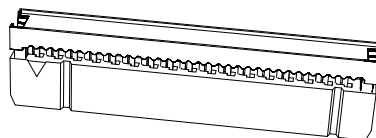

Specifications

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max

Insulation Resistance:1000M ohm. Min

Withstanding Voltage:600V AC For one minute

Operating Temperature Range : -40°C to +105°C


Material:

Plastic:Nylon 6T (UL94V-0)

Standard Color:Black

Contact:Copper Alloy

Plating:Gold Plated

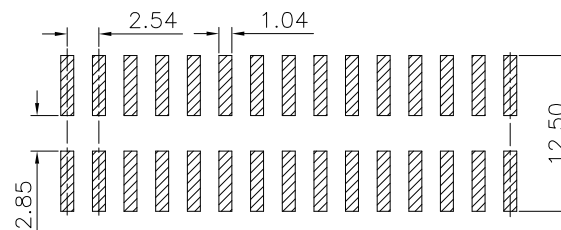

P.C.B Layout


Notes:

60P、64P With Three Key

All Other Pin With One Key

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
6	27.12	5.08	26	52.52	30.48
8	29.66	7.62	30	57.60	35.56
10	32.20	10.16	34	62.68	40.64
12	34.74	12.70	40	70.30	48.26
14	37.28	15.24	50	83.00	60.96
16	39.82	17.78	60	95.70	73.66
20	44.90	22.86	64	100.78	78.74
24	49.98	27.94			

RoHS Compliant

				DRAWN: Romina Wu	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology	
				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION:	SIZE
					SCALE:1:1	2.54mm Shrouded Header With Ejector SMD Type	A4
	05--FEB--2020			APPROVAL: Rory Chen	SHEET: 1 / 1	PART NO:	
REV	DATE	FILE	BY		PROJECTION: 	3010-XX-003-12-00	

