


► General data

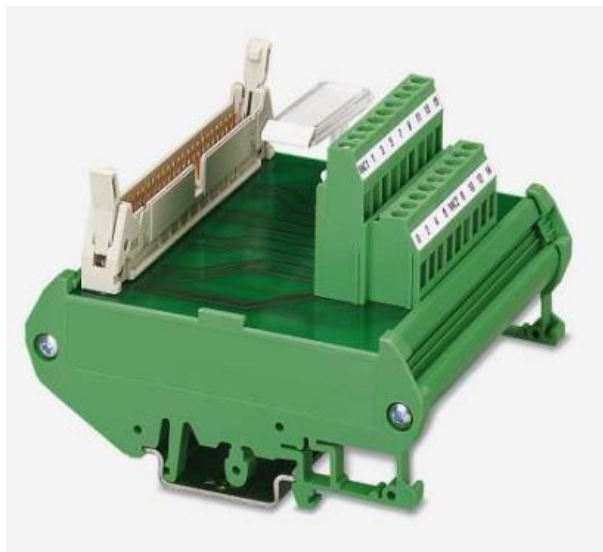

VARIOFACE controller board, to transmit max. 16 channels, only in connection with FLKM 50-PA-SLC 500 OUT/2 A

Order number	2293488
Type	FLKM 50/16/SLC500

Barcode number	4017918108885
Unit pack	1 Piece
Customs tariff	85369010000

► Technical data

General data


Nominal voltage U_N	120 V AC/DC
Max. current carrying capacity per branch	2 A
Max. total current of voltage supply	7 A (Per byte)
Length	90 mm
Width	90 mm
Height	68 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Test voltage	500 V AC (50 Hz, 1 min)
Installation position	Any
Standards/regulations	IEC 664/IEC 664 A/DIN VDE 0110; DIN VDE 0160 (in parts)

Connection data

Min. conductor cross section, rigid	0.2 mm ²
Conductor cross section, rigid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Max. conductor cross section, flexible	2.5 mm ²
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3

▸ Drawings

Circuit diagram

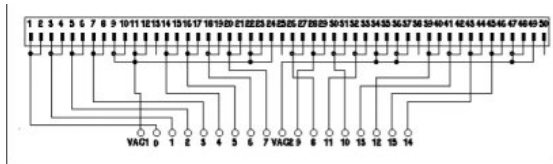

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved