

Material:

* Insulation: Nylon 66, Color Nature

* Contact: Brass

Circuit Pattern Schedule: See Drawing No: CP0110S*

Ordering Code:

CP-01 3 ** * * 0
① ② ③ ④ ⑤ ⑥

① Series No.

② Type of Connector:

3= Straight PCB mount header

③ No of Circuits:

④ Plating Code:

1= 2.54μm(100μ") Tin over 1.02μm(40μ") Nickel

2= Gold flash plated over 1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

A= Selective Gold flash plated over 1.27μm(50μ") Nickel

B= Selective 0.38μm(15μ") gold plated over 1.27μm(50μ") Nickel



C= Selective 0.76μm(30μ") gold plated over 1.27μm(50μ") Nickel

⑤ Variation:

1= UL 94V-2, Without mounting pegs

3= UL 94V-0, Without mounting pegs

⑥ Option: 0= Standard

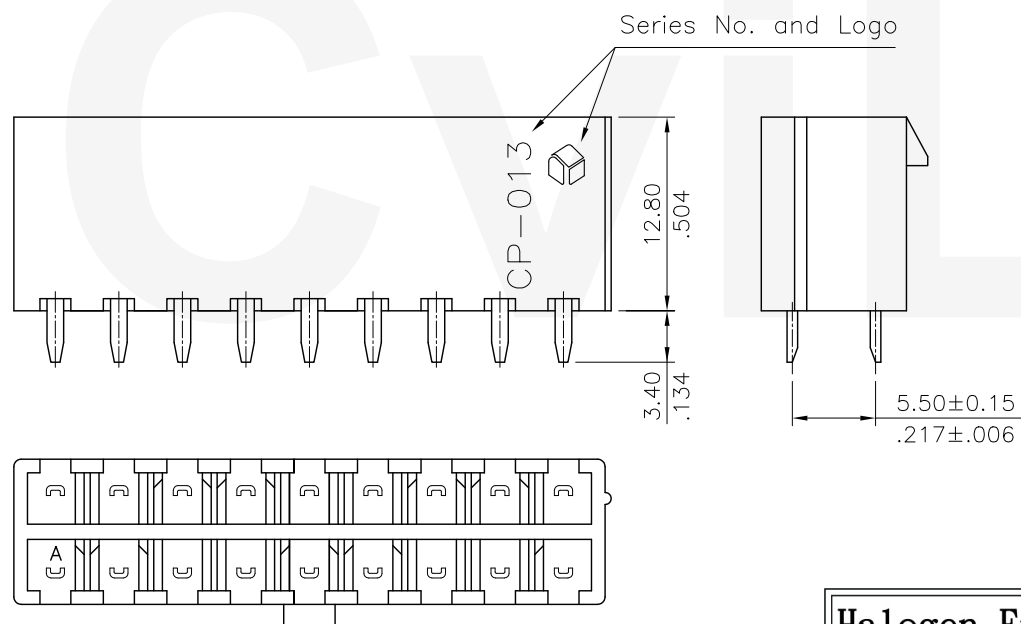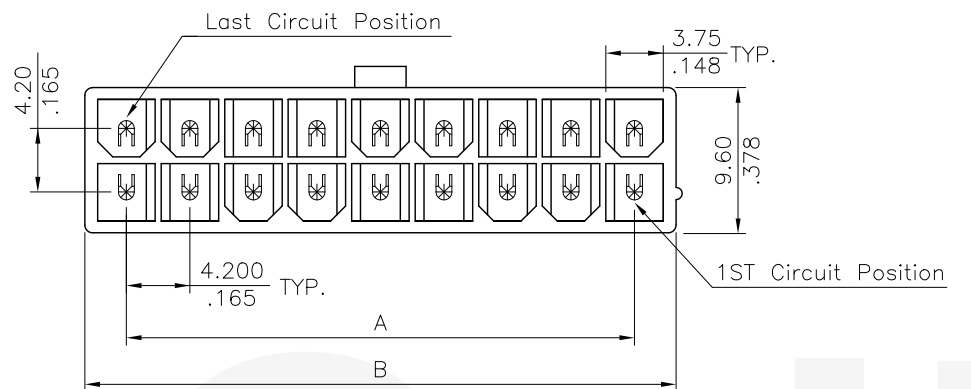

Halogen-Free

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

④				CIVILUX CORP		DATE	UNIT: mm / inch	TITLE: STRAIGHT HEADER	 瀚荃股份有限公司 CviLux Corporation			
③	Una	11/25-10'	ECN10382	2010.12.08	DRAWN BY: Una	11/25-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CP-01 POWER CONNECTOR				
②	Sandy	5/12-08'	ECN08219	ISSUED	ENGINEER: Clark	11/30-10'	.X ± 0.38/.015 X* ± r	MATERIAL:	DRAWING NO. CP0128SM	PART NO.	CP-013***10	
①	SUN	1/15/04'	ECN04025		CHECKED BY: David	11/30-10'	.XX ± 0.25/.010 .X* ±	FINISH:			CP-013***30	
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	11/30-10'	.XXX ± 0.10/.004 .XX* ±		SCALE	2 / 1	SHEET	1 OF 1