



Search by Part # or Keyword



[Printer Labels](#) / [Bradyprinter PR Plus Printer Labels](#) /

3" Core Series PermaSleeve Polyolefin Wire Marking Sleeves

3" Core Series PermaSleeve Polyolefin Wire Marking Sleeves



Product Highlights:

Material:

Polyolefin

For Use with Printer:

BRADY IP® Series Label Printer,
BradyPrinter i5100, BradyPrinter i7100,
BRADYPRINTER PR Plus Series Label
Printer, THT 3" Core Printer

Material Number:

B-342

Color:

White

Quantity per Roll:

1000

Part Number:

PS-125-2-WT-S-2

ADD TO CART

1



Add To Favorites

People Also
Viewed




3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves




3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves




3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves



3" Core Series
PermaSleeve
Polyolefin Wire
Marking Sleeves

PermaSleeve® PS Heat-Shrink Polyolefin (B-342) wire marking sleeves combine speed, ease of use, and permanence to create long-lasting, high quality identification.

- 3:1 heat shrinkable sleeve fit snugly around wires for maximum insulation protection and permanent identification
- Fade-resistant and smudge-proof for superior aesthetic appearance
- Cold resistant and flame-retardant with an operating temperature of -67°F to 275°F (-55°C to 135°C)
- Meets SAE-AMS-DTL-23053/5C (Class 1), SAE-AS-81531, MIL-STD-202; RoHS Compliant; and UL Recognized

Specifications

Material Number	B-342
California Prop 65	WARNING: Cancer - www.p65warnings.ca.gov
Catalog Page #	198
Diameter as Supplied	0.125 in
Dimensions	0.235 in H
UOM	Roll of 1000 Each
Finish	Matte
Maximum Service Temperature °F	275 °F
Maximum Wire Diameter	0.11 in
Maximum Wire Gauge	16 AWG
Minimum Service Temperature °F	-67 °F
Minimum Wire Diameter	0.046 in
Minimum Wire Gauge	22 AWG
Printable Sides	Single-Side Printable
Product Number	104663
UPC	662820022060
Quantity per Roll	1000
Quantity per Row	2
Recovered Diameter	0.046 in
Roll Width	2 in
Shrink Ratio	3:1
Sleeve Size	0.125 in Dia x 1 in W
Sleeve Size(m)	3.2 mm Dia x 25.4 mm W
Sleeve Slits	Yes

Sleeve Width	1 in
Trade Name	PermaSleeve®
Unit Price	/Sleeve
Applications	Cable & Wire Marking
Color	White
For Use with Printer	BRADY IP® Series Label Printer, BradyPrinter i5100, BradyPrinter i7100, BRADYPRINTER PR Plus Series Label Printer, THT 3" Core Printer
Label/Media Format	Roll
Label Properties	Heat Shrink Sleeves
Material	Polyolefin
Material Properties	Flame-retardant, Heat-Shrinkable
Print Technology	Thermal Transfer
Resistance Properties	Chemical-Resistant, Corrosion-Resistant, Humidity-Resistant, Smear-Resistant, UV-Resistant, Weather-Resistant
Suggested Ribbon Series	R2000, R4300, R4502S, R5000, R6600, R6700

Solutions

[Floor Marking Guide](#)
[GHS Label Compliance](#)
[Lockout Tagout Compliance](#)
[Arc Flash Labeling Requirements](#)
[Cable and Wire Label Options](#)
[Product and Barcode Labeling](#)
[Brand Protection Solutions](#)

Services

[Lockout Tagout Services](#)
[Arc Flash Services](#)
[Confined Space Services](#)
[Software Programming & Integration](#)
[Label Template & File Conversion](#)
[Printer Use & Training](#)
[Printer Preventative Maintenance](#)
[Toll and Custom Coating](#)
[Authentication & Tracking Services](#)

Help

[Contact Us](#)
[Website Feedback](#)
[Knowledge Center](#)
[Printer Drivers & Firmware](#)
[Brady Software Updates](#)
[Safety Data Sheets](#)
[Technical Data Sheets](#)
[WEEE-RoHS Compliance](#)
[Product Certification](#)
[Printer Registration](#)

Resources


[Find a Distributor](#)
[Design Custom Safety Signs](#)
[Create Custom THT Labels](#)
[Printer Selection Tool](#)
[Label Selection Tool](#)
[Digital Catalog](#)
[Request a Catalog](#)
[Interactive Facility Map](#)
[EPA e-Manifest Update](#)

[About](#)
[Careers](#)
[Investors](#)
[Privacy Policy](#)
[Terms and Conditions](#)
[Terms of Use](#)
[ISO](#)
[Certificates](#)

[Sites](#)
[Distributor Portal](#)
[International Sites](#)
[Safety Services & Software](#)
[Smart ID Brand](#)
[Protection Solutions](#)

6555 W.
Good Hope
Rd.
Milwaukee,
WI 53223
Phone: 888-
250-3082
Hours: 7am-
6pm CT
Monday -
Thursday;
Friday 7am-
5pm CT

manufacturer of complete solutions that identify and protect people, products and places. Brady's products help customers increase safety, security, productivity and performance and include high-performance labels, signs, safety devices, printing systems and software.

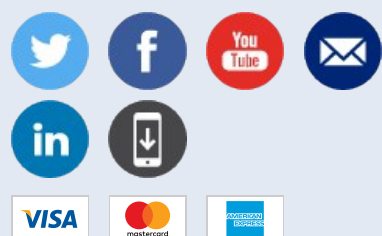

2018 © Brady Worldwide, Inc.