


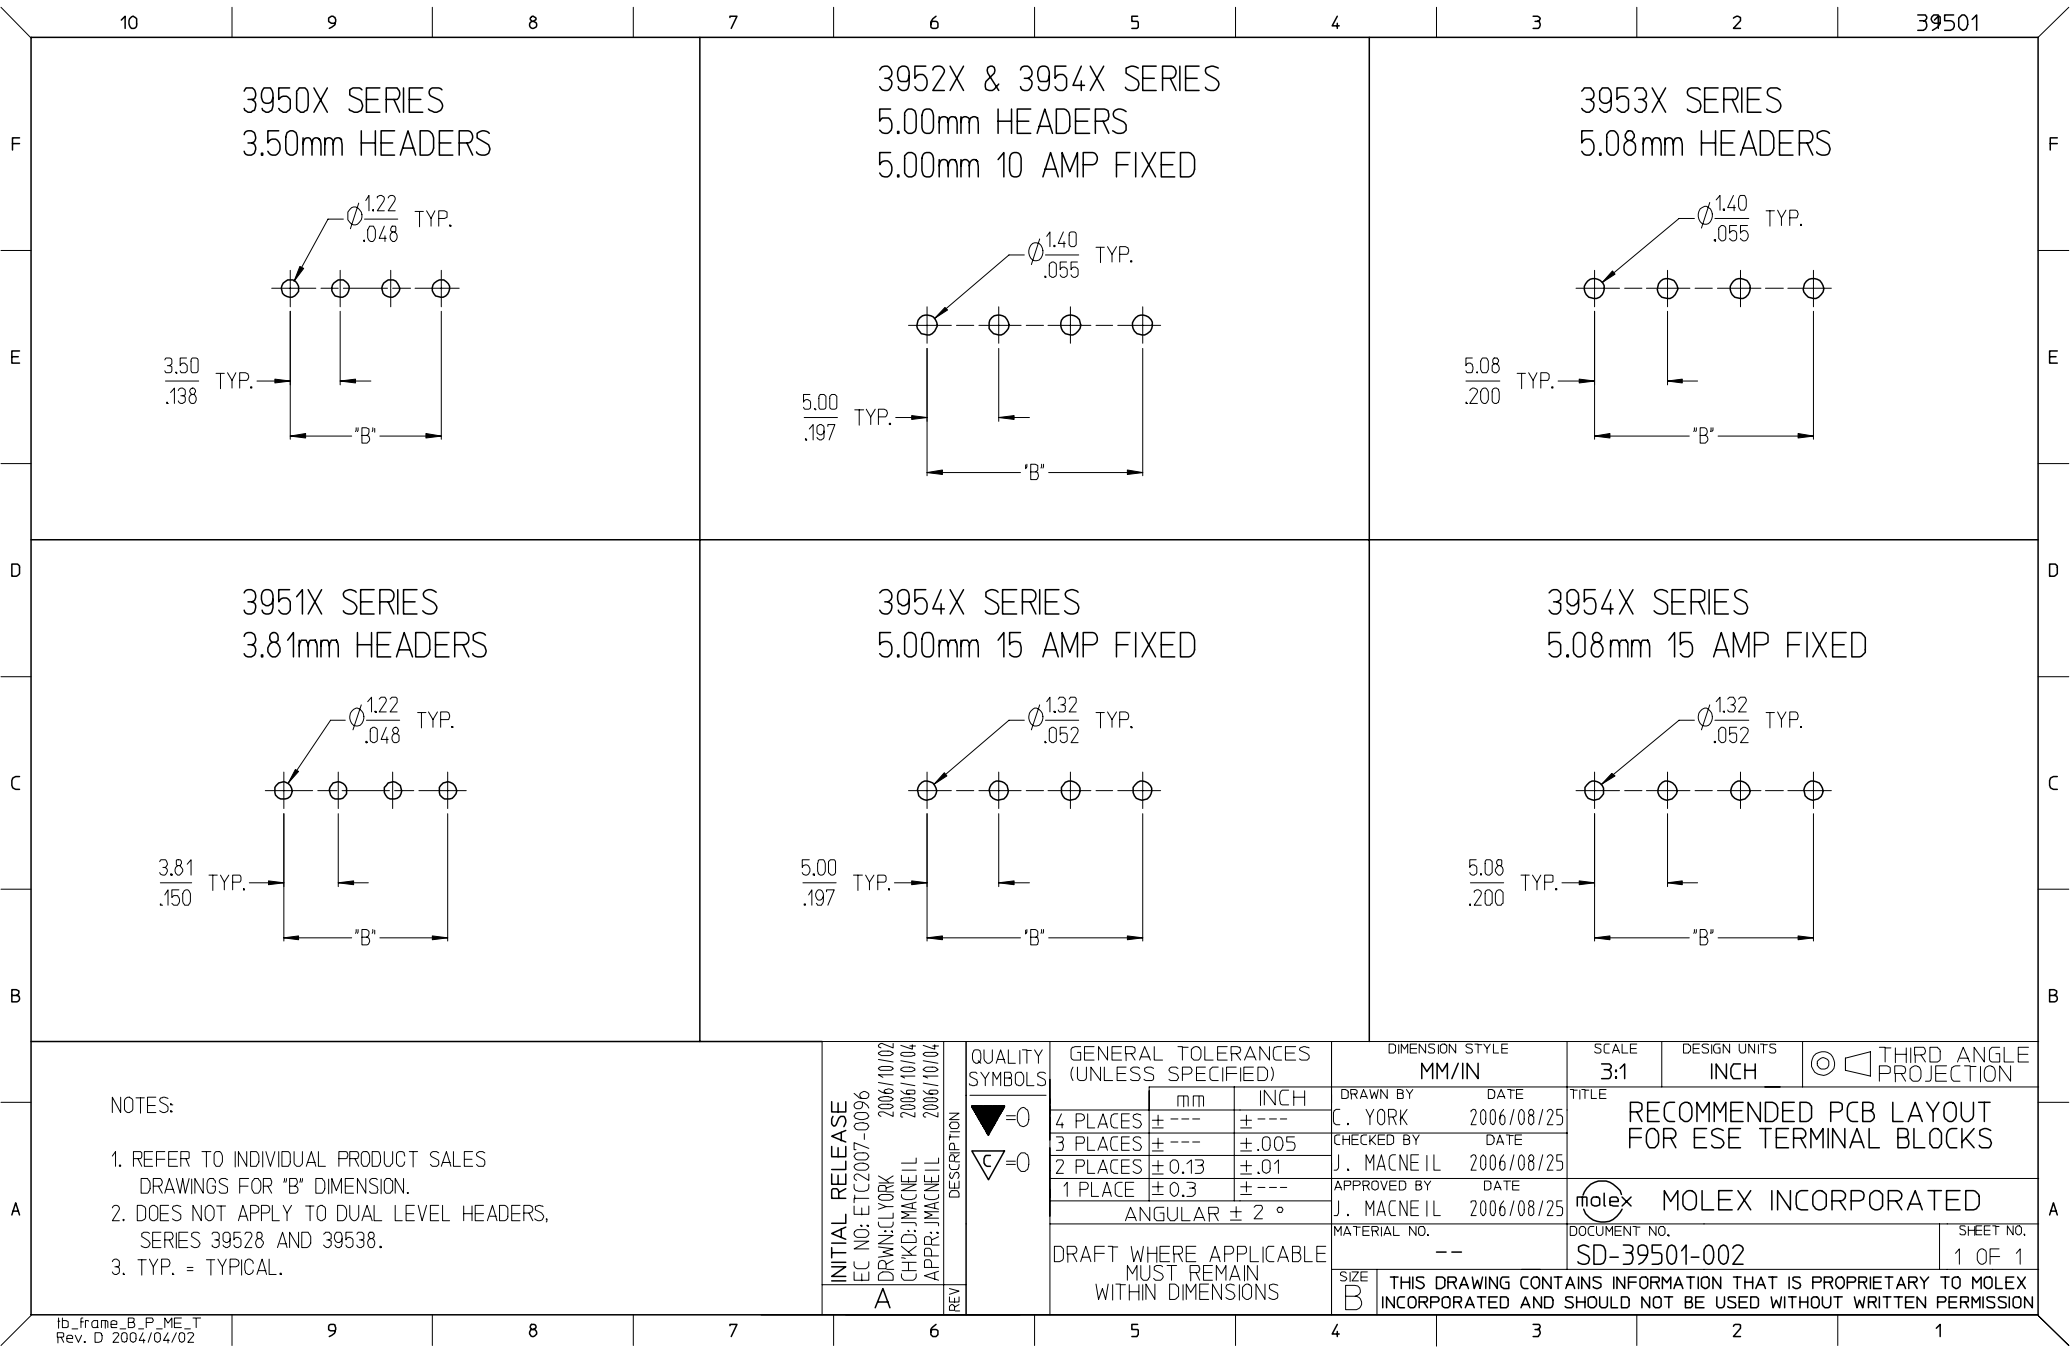

F

E

D

C

B

A

F


E

D

C

B

A

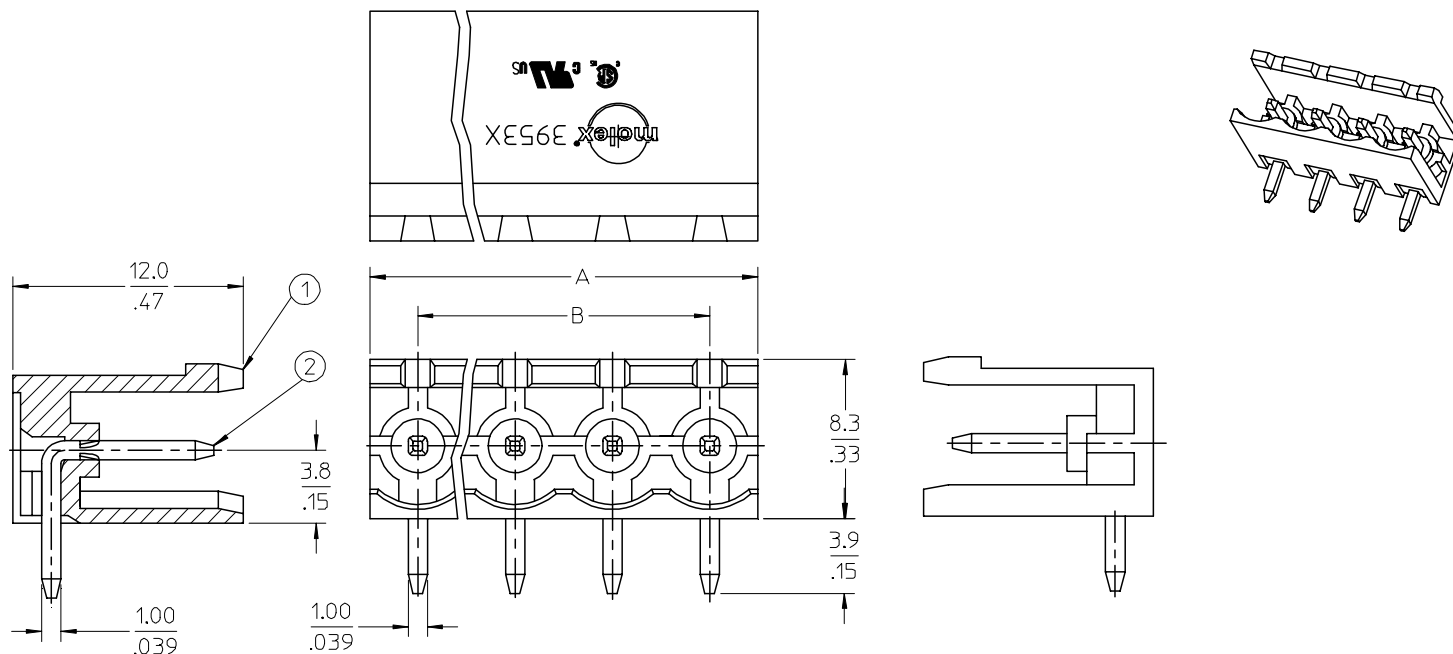

SPECIFICATIONS:

- Material:
 - Body: PA66
 - Pin: Brass
- Wire range: N/A
- Electrical rating: 300V, 15A.
- Wire strip length: N/A
- Operating temperature: -40C to +105C.
- Max torque: N/A
- Insulation resistance: DC 500V, 500M.
- Dielectric withstand: AC 2500V for 1 minute.
- Breakdown voltage: 4000V.
- $A = (N \times P)$
- $B = (N - 1) \times P$
- P (PITCH) = 5.08mm (.200").
- N = Number of positions available 2 through 24.

ENTER DESCRIPTION EC NO: NEO2006-0310 DRAWN: LROTHAUS 2006/01/09 CHKD: CYORK 2006/01/09 APPR: JPAMLICK 2006/01/10 A	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION ⊙ □	
			MM/IN		4:1	INCH		
			mm	INCH	TITLE			
			DRAWN BY DATE		5.08MM, EURO HEADER, RIGHT ANGLE, OPEN END			
			CHECKED BY DATE					
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	C. YORK 01/06/06		MOLEX INCORPORATED			SHEET NO. 1 OF 1
			APPROVED BY DATE					
			MATERIAL NO.		DOCUMENT NO.			
			SEE CHART		SD-39532-003			
			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

