


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**Fast Recovery
Rectifier**
125 Amperes Average
1400 Volts



R502__13/R503__13 (Outline Drawing)

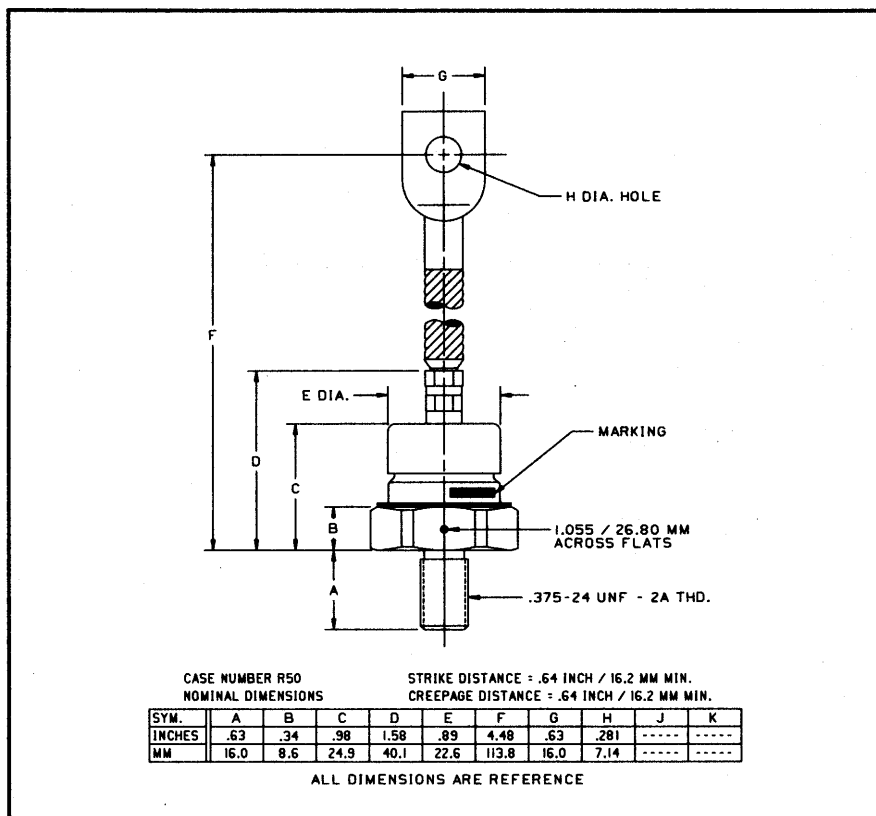

R502__13/R503__13
Fast Recovery Rectifier
125 Amperes Average, 1400 Volts

Features:

- ☐ Fast Recovery Times
- ☐ Soft Recovery Characteristics
- ☐ Standard and Reverse Polarities
- ☐ Flag Lead and Stud Top Terminals Available
- ☐ High Surge Current Ratings
- ☐ High Rated Blocking Voltages
- ☐ Special Electrical Selection for Parallel and Series Operation
- ☐ Glazed Ceramic Seal Gives High Voltage Creepage and Strike Paths

Applications:

- ☐ Inverters
- ☐ Choppers
- ☐ Transmitters
- ☐ Free Wheeling Diode

Ordering Information:

Select the complete part number you desire from the following table:

Type	Voltage		Current		Recovery Time		Leads	
	V _{RRM} (Volts)	Code	I _{F(av)} (A)	Code	t _{rr} (μsec)	Code	Case	Code
R502 (Standard Polarity)	200	02	125	13	0.7	LS	DO-8	WA
	400	04						
	600	06						
	800	08						
R503 (Reverse Polarity)	1000	10						
	1200	12						
	1400	14						

Example: Type R502 rated at 125A average with V_{RRM} = 1400V,
Recovery Time = 0.7 μsec and standard flexible lead, order as:

Type	Voltage	Current	Time	Leads
R 5 0 2	1 4	1 3	LS	W A

<http://store.iic.cc/>



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

R502__13/R503__13
Fast Recovery Rectifier
125 Amperes Average, 1400 Volts

Absolute Maximum Ratings

Characteristics	Symbol	R502__13/R503__13	Units
RMS Forward Current	$I_{F(rms)}$	195	Amperes
Average Forward Current	$I_{F(av)}$	125	Amperes
One-half Cycle Surge Current	I_{FSM}	2500	Amperes
I^2t (for Fusing), Times ≥ 8.3 milliseconds	I^2t	26000	A^2sec
Storage Temperature	T_{stg}	-40 to +190	$^{\circ}C$
Operating Temperature	T_j	-40 to +150	$^{\circ}C$
Mounting Torque		120	in-lb


Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	R502__13/R503__13	Units
Current - Conducting State Maximums				
Forward Voltage Drop	V_{FM}	$T_j = 25^{\circ}C$, $I_{FM} = 470A$	2.5	Volts
Voltage - Blocking State Maximums				
Repetitive Peak Reverse Voltage (Rated Limit)	V_{RRM}		1400	Volts
Non-rep. Trans. Peak Rev. Voltage (Rated Limit)	V_{RSM}	$V \leq 5.0msec$	1600	Volts
Reverse Leakage Current, mA peak	I_{RRM}	T_j at max., $V_{RRM} = \text{Rated}$	45	mA
Switching				
Maximum Reverse Recovery Time	t_{rr}	$I_{FM} = 314A$, $t_p = 40\mu sec$, $di_F/dt = 25A/\mu sec$, $T_C = 25^{\circ}C$	0.7	μsec
Thermal				
Maximum Resistance, Junction to Case	$R_{\theta(j-c)}$		0.28	$^{\circ}C/Watt$
Maximum Resistance, Case to Sink (Lubricated)	$R_{\theta(c-s)}$		0.12	$^{\circ}C/Watt$


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

R502 _13/R503 _13
Fast Recovery Rectifier
125 Amperes Average, 1400 Volts


Reverse Recovery Wave Form

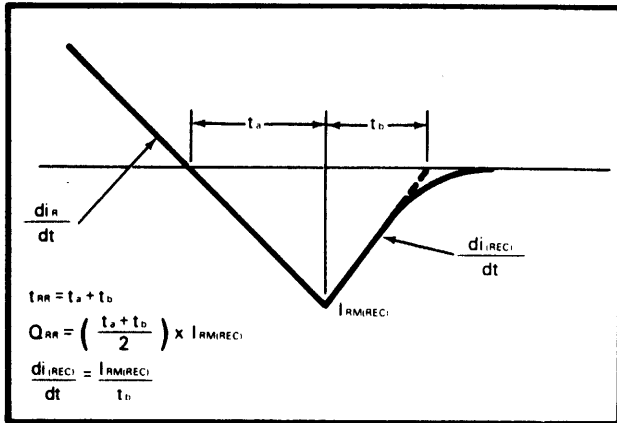


Typical Reverse Recovery Charge Vs. Rate of Current Fall

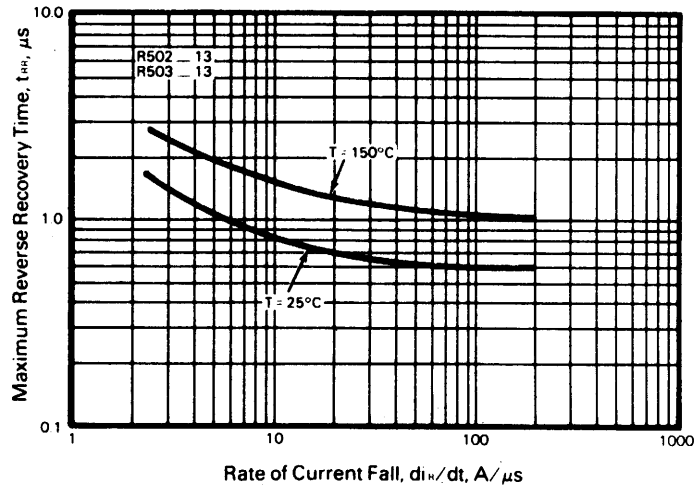

Typical Reverse Recovery Time Vs. Rate of Current Fall

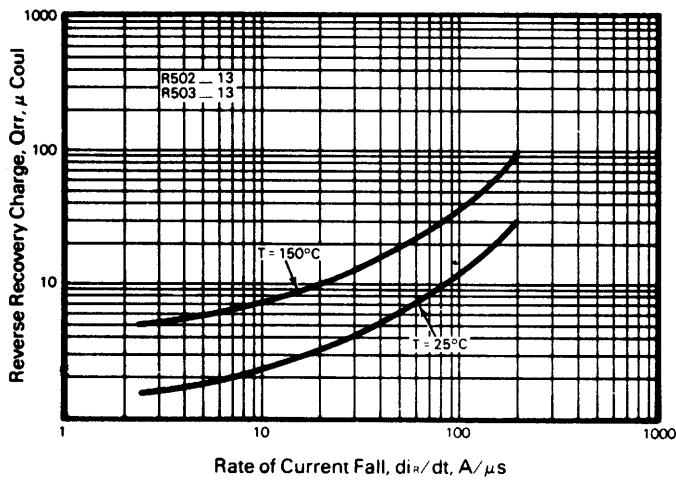


Typical Ratio of Current Recovery to Rate of Current Fall

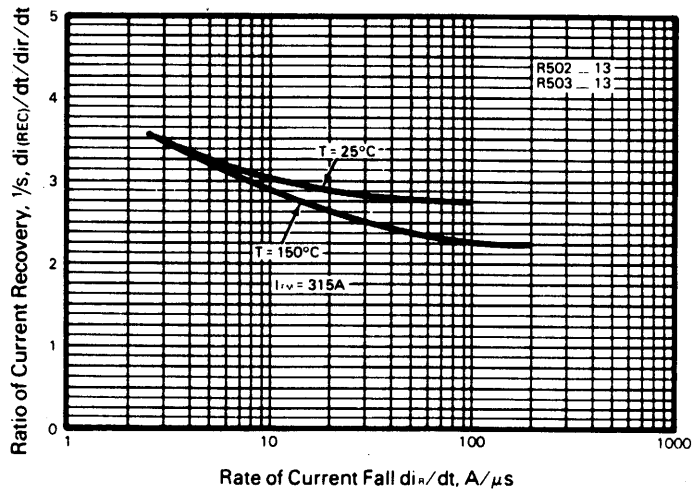


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

R502 __13/R503 __13
Fast Recovery Rectifier
125 Amperes Average, 1400 Volts


Forward Current Vs. Forward Voltage Drop

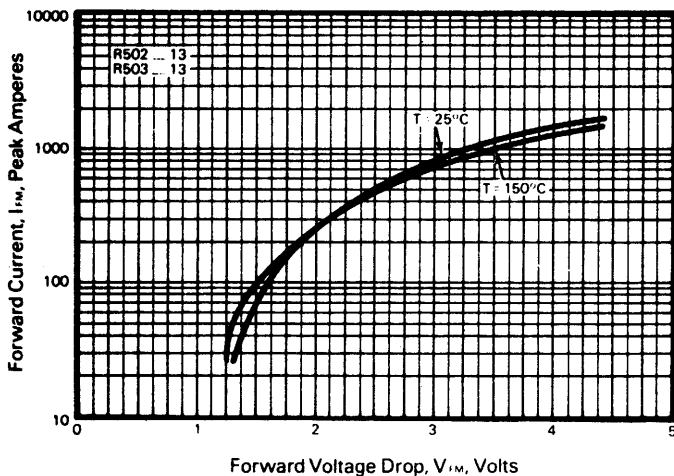

Transient Thermal Impedance Vs. Time

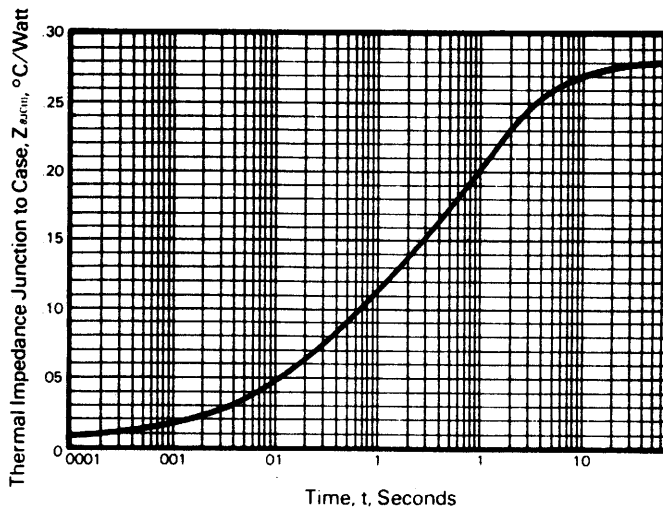

Energy Loss Per Pulse for Sinusoidal Pulses

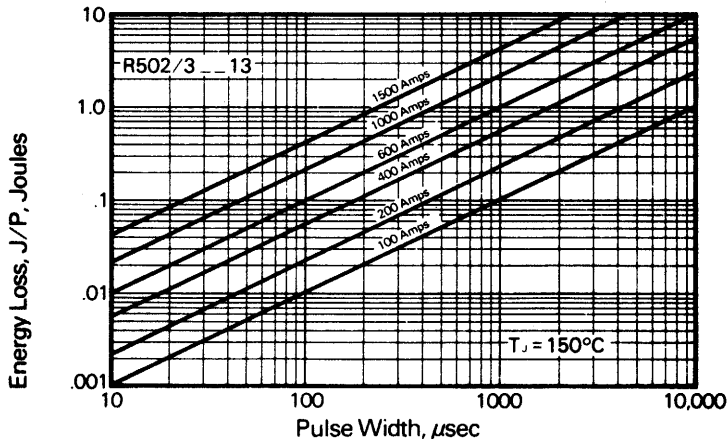

Calculation of Fast Recovery Diodes and Allowable Case Temperature

1. Conduction Losses

$$P_{av(cond)} = J/P \times F$$

2. Reverse Recovery Losses (Approximate)

$$P_{av(sw)} = 1/4 \times V_R \times \frac{di_R}{dt} \times T_{rr}^2 \times \left(\frac{1/s}{1 + 1/s} \right)^2 \times F \times 1 \times 10^{-6}$$

3. Maximum Allowable Case Temperature

$$T_{C(max)} = T_j - (P_{av(cond)} + P_{av(sw)} \times R_{\theta(j-c)})$$

Where:

$P_{av(cond)}$ = Forward Conduction Power Loss in Watts

$P_{av(sw)}$ = Reverse Recovery Power Loss in Watts

J/P = Energy Loss per Pulse in Joules

F = Frequency in Hertz

V_R = Steady State Reverse Operating Voltage in Volts

di_R/dt = Rate of Decay of Forward Current in Amperes/μsec

T_{rr} = Reverse Recovery Time in Microseconds

$\frac{1}{"S"}$ = Ratio of Recovery di/dt $\left(\frac{di_F/dt}{di_R/dt} \right)$

F = Operating Frequency in Hertz

$T_{C(max)}$ = Maximum Allowable Case Temperature in °C.

T_j = Maximum Operating Junction Temperature in °C.

$R_{\theta(j-c)}$ = DC Junction to Case Thermal Impedance in °C/Watt.