

MOLDED DIALLYL INSULATED TERMINALS

DIALLYL PHTHALATE INSULATED TERMINALS

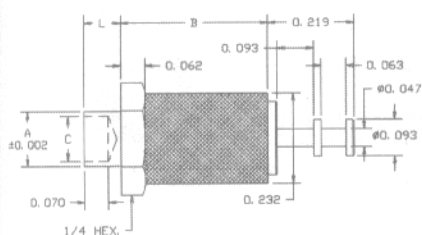


FIG.1275

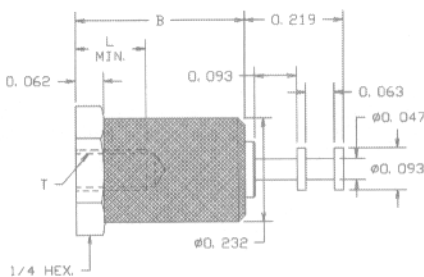


FIG.1280

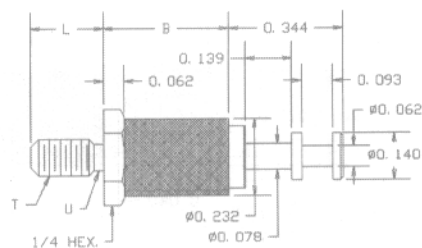


FIG.1285

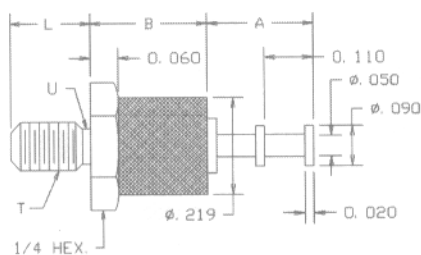


FIG.1286

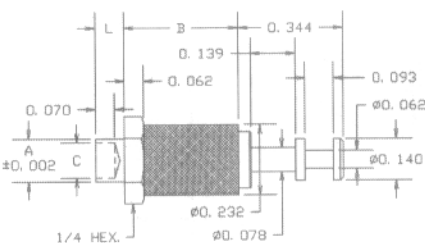


FIG.1290

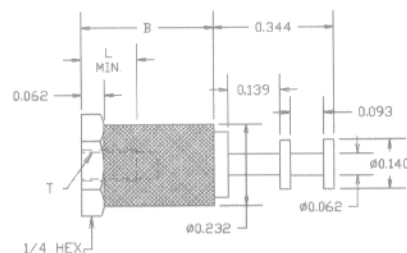


FIG.1295

	PART NO.	FOR PANEL THICKNESS	L	T THREAD	A	B	C	DIELECTRIC WITHSTANDING VOLTAGE
FIG.1275	1127-34	.062	.094	-	.141	.375	.116	6000 VRMS
	1127-35	.094	.125	-	.141	.375	.116	
	1127-36	.125	.156	-	.141	.375	.116	
	1127-37	.188	.234	-	.141	.375	.116	
FIG.1280	1127-38	-	.156	4-40	-	.375	-	6000 VRMS
	1127-39	-	.156	6-32	-	.375	-	
	1127-40	-	.219	6-32	-	.594	-	
FIG.1285	1127-41	-	.219	4-40	-	.375	-	6000 VRMS
	1127-42	-	.219	6-32	-	.375	-	
	1127-43	-	.250	6-32	-	.375	-	
	1127-44	-	.375	6-32	-	.375	-	
	1127-45	-	.219	4-40	-	.594	-	
FIG.1286	1169-36	-	.188	4-40	.240	.260	-	3500 VRMS
	1169-37	-	.250	4-40	.240	.260	-	
	1169-38	-	.325	4-40	.290	.260	-	
FIG.1290	1127-46	.062	.094	-	.098	.375	.064	6000 VRMS
	1127-47	.094	.125	-	.098	.375	.064	
	1127-48	.125	.156	-	.098	.375	.064	
	1127-49	.188	.234	-	.098	.375	.064	
	1127-50	.062	.094	-	.141	.375	.116	
	1127-51	.094	.125	-	.141	.375	.116	
	1127-52	.125	.156	-	.141	.375	.116	
	1127-53	.188	.234	-	.141	.375	.116	
FIG.1295	*1127-04	-	.156	4-40	-	.375	-	6000 VRMS
	1127-54	-	.156	6-32	-	.375	-	
	*1127-05	-	.219	4-40	-	.594	-	
	*1127-07	-	.219	6-32	-	.594	-	

TERMINAL: ELECTRO-SOLDER PLATED, U-UNDERCUT AT MANUFACTURERS OPTION, *FOR 1127-07, 1127-05 AND 1127-07 .078 DIA. BECOMES .062 DIA