


ENERGIZER NO. 1231



Industry Standard Dimensions in mm (inches)

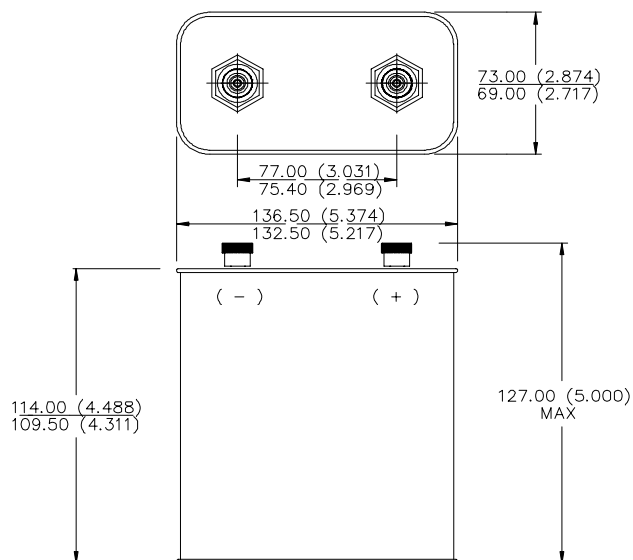

Chemical System: Zinc-Manganese Dioxide (Zn/MnQ)

Designation: ANSI / NEDA-918D, IEC-4R25-2

Battery Voltage: 6 Volts

Average Weight: 1,270 grams (44.7 oz.)

Volume: 1,123 cubic centimeters (68.5 cubic inch)


Average Capacity: 22 Ah to 3.2 volts
 (Rated at 25mA continuous at 21°C)

Cells: Eight No. 60 (size "F")
 Two parallel strings of four in series

Jacket: Metal

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

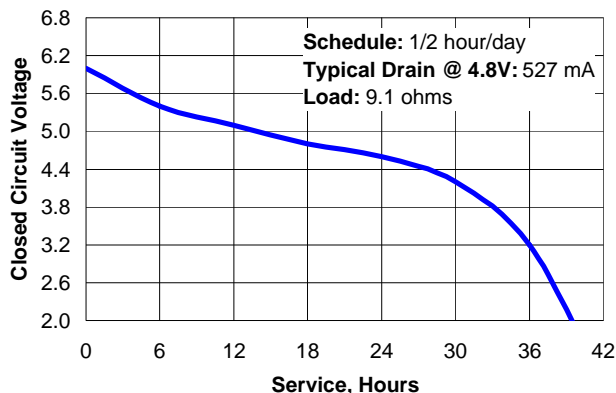

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 4.8V (milliamperes)	Load (ohms)	Cutoff Voltage			
			2.6V	3.0V	3.2V	3.6V
			Hours			
1/2 hour/day	527	9.1	38	37	36	34
24 hours/day	527	9.1	35	31	29	25

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved