

DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-59-280

REVISIONS

ISSUE	CHANGES
8	CN 37052 B JJS 07/09/96
9	CN 39422 C JPK 03/15/06

KC-59-280SD

SCALE 4 : 1

APPROX SURFACE AREA N/A

USED ON


REF:

PLUG, BNC

DRAWN JCA	DATE 03/05/92
DESIGN MJB	DATE 03/05/92
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-59-280

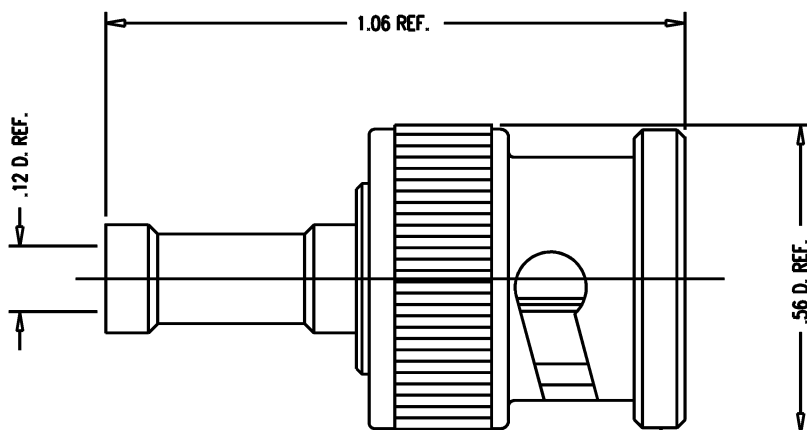

STAMP: KINGS KC-59-280

NOTES:

1. FOR USE WITH M17/119-RG174, M17/094-RG179 & M17/113-RG316 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-402.
3. FOR CABLE TRIMMING USE KTJ-100 AND KTD-145.
4. FOR CRIMPING USE DIE KTH-2081.
5. MATERIALS:
INSULATORS-TEFLON, ASTM-D4894
GASKET-SILICONE RUBBER, A-A-59588
K-GRIP SLEEVE-COM. BRONZE TUBE, ASTM-B135
OUTER CONTACT } BER. COP., ASTM-B196
CENTER CONTACT }
SPRING WASHER }
ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
ALL METAL PARTS-SILVER PLATE PER ASTM-B700
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
WORKING VOLTAGE-500 VRMS
FREQUENCY RANGE-DC TO 4 GHZ

GSD