


UF318AAA series

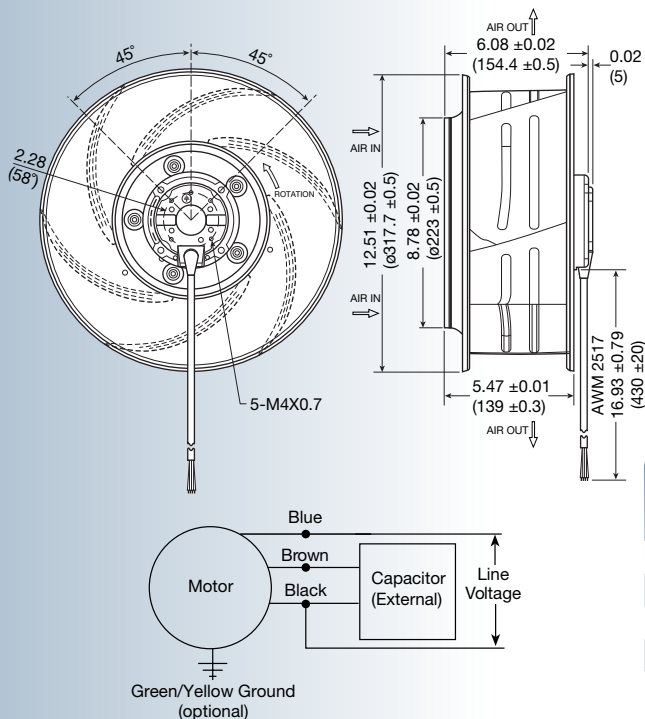

Size: (318 dia x 154 mm)
12.5 dia x 6.08 inches

Features: backward curved impeller

Operating voltage (VAC): 115 or 230

Operating temp: -20° ~ 50°C

Construction: aluminum die cast motor base,
aluminum impeller

Bearing option: motor quality ball bearings


Motor: 4 pole permanent split capacitor,
single phase

Air flow: centrifugal

Connection: lead wires

Protection: thermal

Insulation: Class B

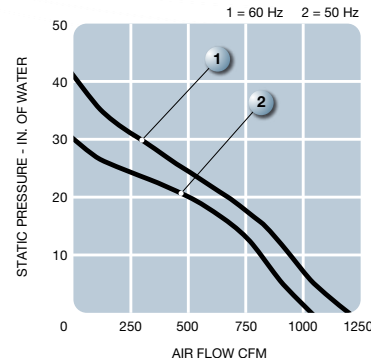

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume		Max. Static Pressure (H ₂ O)		Sound Noise dbA	Weight kg
							M ³ /Min.	CFM	MM	INCH		
UF318AAA12-H1C4A	115	50	115	1.00	2.00	1390	28.8	1015	30	1.2	61	3.8
	115	60	160	1.43	2.00	1580	33.0	1165	40	1.6	64	3.8
UF318AAA23-H1C4A	230	50	115	0.56	1.40	1390	28.8	1015	30	1.2	61	3.8
	230	60	160	0.70	1.30	1580	33.0	1165	40	1.6	64	3.8