



EVX 121000

12V 100.0Ah

EVX 121000 is designed specially for electric vehicles, such as electric golf cart, electric wheelchair, mower, dust collector...etc. It has high cycling life, high efficiency and long service life.



Specification


Cells Per Unit	6
Voltage Per Unit	12
Capacity	100Ah @ 20hr-rate to 1.75V per cell @25 °C (77°F)
Weight	Approx. 35.5kg(78.1 lbs)
Maximum Discharge Current	500A(5sec)
Internal Resistance	Approx. 8mΩ
Operating Temperature Range	Discharge: -20°C~50°C (-4°F~122°F) Charge: 0°C~40°C (32°F~104°F) Storage: -20°C~40°C (-4°F~104°F)
Nominal Operating Temperature Range	25°C±3°C (77°F±5°F)
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	30.0A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
Self Discharge	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Bolt & Nut
Container Material	Polypropylene



CSB-manufactured batteries are UL-recognized components under UL924 and UL1989.
CSB is also certified by ISO 9001 and ISO 14001.

Dimensions

unit: (MM)

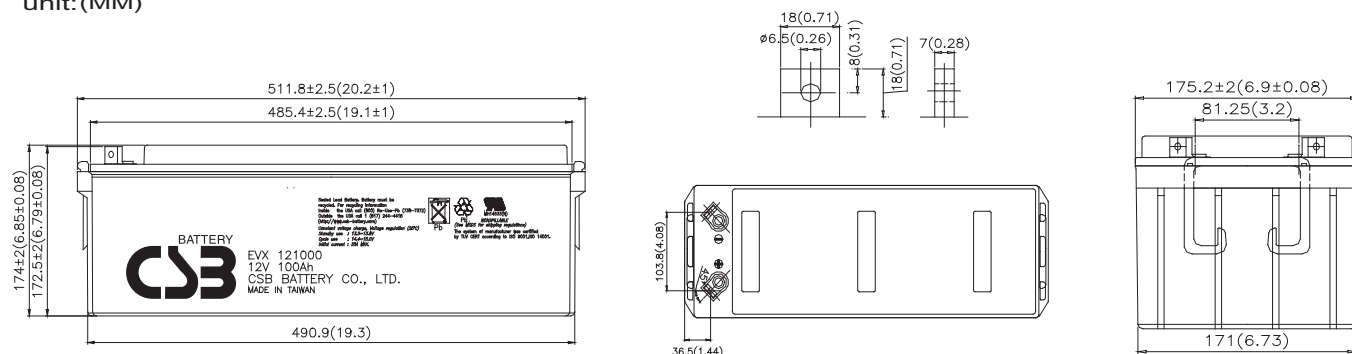

Constant Current Discharge Characteristics Unit:A (25°C , 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	75.67	52.25	38.90	32.80	22.42	19.00	16.92	11.42	9.67	5.45
1.67V	73.40	50.44	37.43	31.47	21.55	18.23	16.22	10.95	9.32	5.23
1.70V	72.42	49.67	36.80	30.90	21.17	17.90	15.92	10.75	9.17	5.13
1.75V	70.38	48.21	35.85	30.10	20.55	17.33	15.46	10.42	8.88	4.97
1.80V	68.33	46.75	34.90	29.30	19.92	16.75	15.00	10.08	8.58	4.81
1.85V	66.29	45.29	33.95	28.50	19.30	16.18	14.54	9.75	8.29	4.65

Constant Power Discharge Characteristics Unit:W (25°C , 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	908.00	627.00	467.00	393.00	269.00	228.00	203.00	137.00	116.00	65.40
1.67V	880.70	605.30	449.50	377.60	258.50	218.90	194.60	131.40	111.80	62.67
1.70V	869.00	596.00	442.00	371.00	254.00	215.00	191.00	129.00	110.00	61.50
1.75V	844.50	578.50	430.50	361.50	246.50	208.00	185.50	125.00	106.50	59.60
1.80V	820.00	561.00	419.00	352.00	239.00	201.00	180.00	121.00	103.00	57.70
1.85V	795.50	543.50	407.50	342.50	231.50	194.00	174.50	117.00	99.50	55.80


• All mentioned values are average values.

EVX 121000


12V 100.0Ah




Trickle (or Float) Service Life

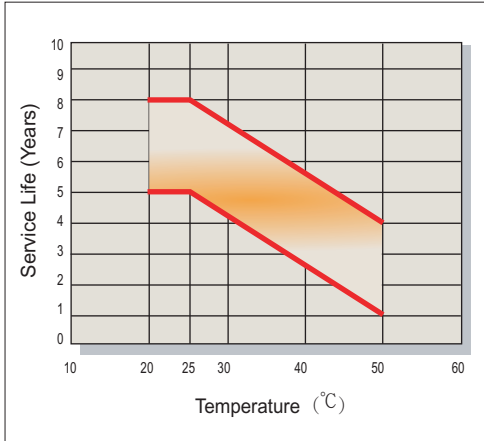


Capacity Retention Characteristic

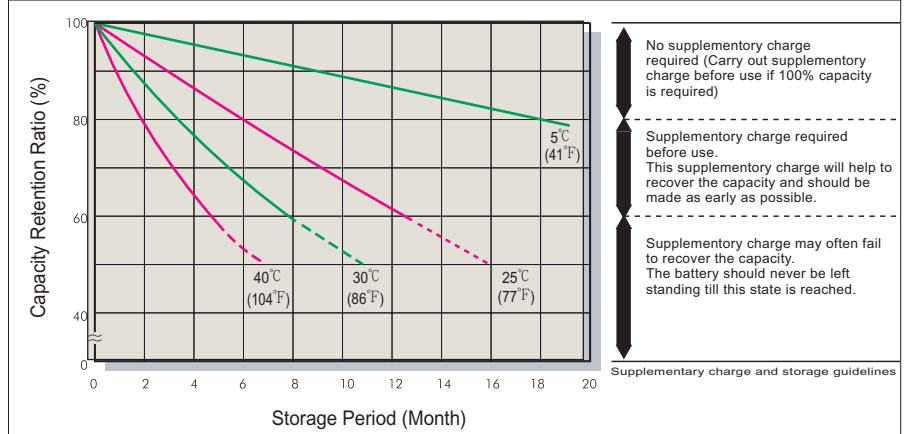


Battery Voltage and Charge Time for Standby Use

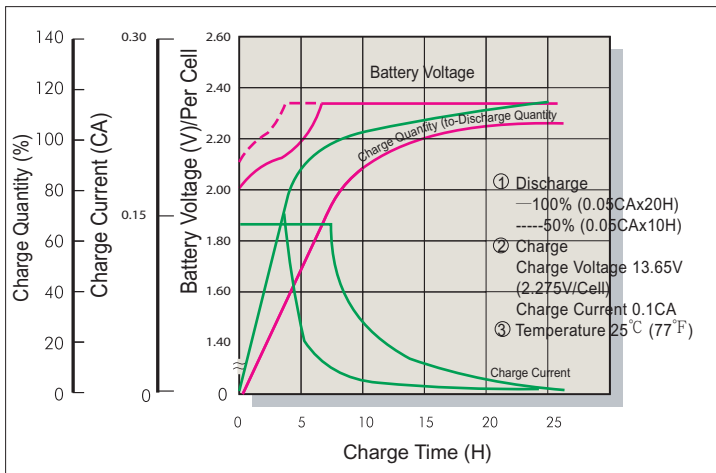


GP & EVX Series Cycle Service Life

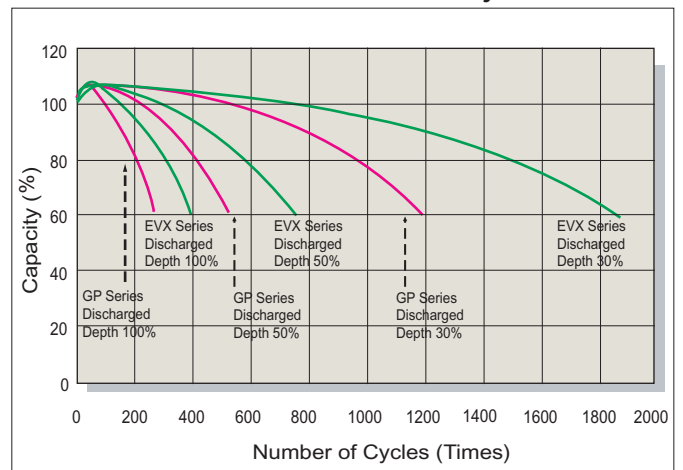

Battery Voltage and Charge Time for Cycle Use

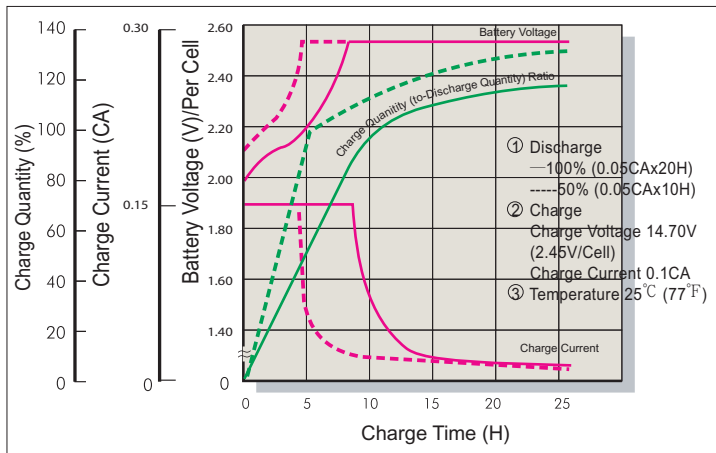

Terminal Voltage (V) and Discharge Time (25°C 77°F)

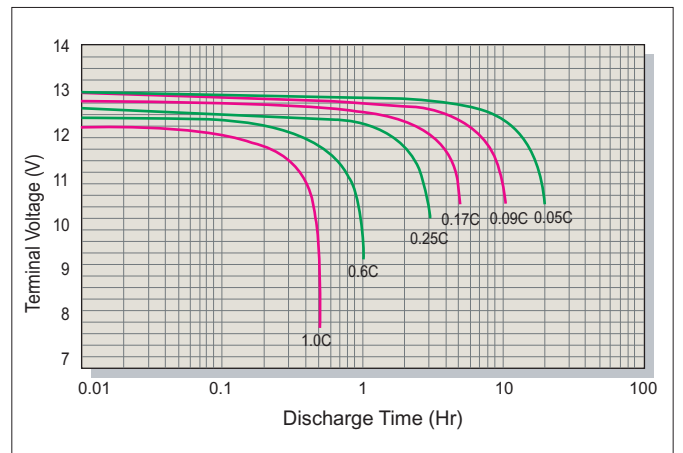

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

Sales Office URL: WWW.CSB-BATTERY.COM

CSB BATTERY CO., LTD.
TAIWAN OFFICE
Tel: +886-2-8751-5000
Fax: +886-2-8751-6161
E-mail: service@csb-battery.com.tw

CSB BATTERY OF NETHERLANDS B.V
NETHERLANDS OFFICE
Tel: +31(0) 180 418 140
Fax: +31(0) 180 418 327
E-mail: eurosales@csb-battery.com

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
SHANGHAI OFFICE
Tel: +86-21-5046-1622, 5046-0833
Fax: +86-21-5064-3314

CSB BATTERY TECHNOLOGIES, INC.
USA OFFICE
Tel: +1-817-244-7777/1-8003 CSBUSA(272872)
Fax: +1-817-244-4445
E-mail: csb@csb-battery.com

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
BEIJING OFFICE
Tel: +86-10-6597-8060, 6597-8070
Fax: +86-10-6597-8050
E-mail: chinasls@csb-battery.com

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
SHENZHEN OFFICE
Tel: +86-755-2694-2788/2606/2706
Fax: +86-755-2694-2748
E-mail: she@csb-battery.com.tw