



# Industrial Specification Grade Straight Blade Receptacles

2 Pole, 3 Wire  
Grounding  
15A 125V, 20A 125V  
15A 250V, 20A 250V

INDUSTRIAL  
COMMERCIAL  
RESIDENTIAL


## A-5 STRAIGHT BLADE RECEPTACLES

### TESTING & CODE COMPLIANCE


- UL Listed to 498, meets UL Federal Spec. WC-596 (file no. 15058).
- Meets all CSA requirements, C22.2 no. 42, CSA (file no. 6233-01).
- NOM Certified.

### MATERIAL CHARACTERISTICS


Nylon base and cover.  
Environmental:  
Flammability per UL 94 requirements, V2 rated.  
Temperature Rating:  
Single:  
-40°C to 70°C;  
Duplex:  
-20 °C to 70°C.

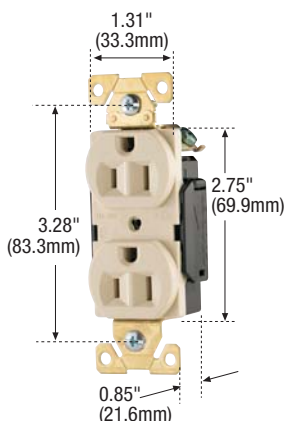

5262

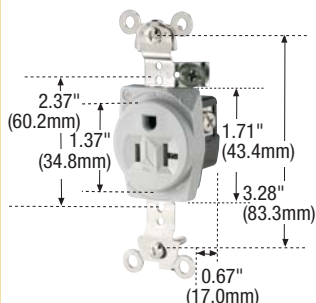

5361

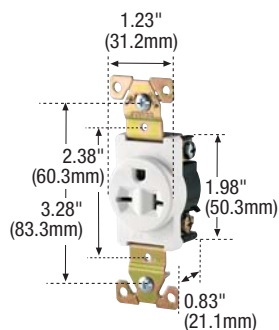

5461

## Duplex and Single Receptacles

### FEATURES

- Exclusive 5-leaf solid brass line contacts ensure lowest heat rise, smooth plug blade insertion, long-term retention.
- Rigid, glass reinforced nylon base lends ultimate strength & superior high heat resistance in contact carrier.
- Unique screw terminal guards provide fast, easy insulation from conductive surfaces.
- 0.050" (1.27mm) solid brass mounting strap with non-riveted, integral one-piece grounding system for highest durability - assures superior ground integrity under heaviest use.
- High impact and chemical-resistant nylon face.
- Tapered lead-in slots on back wiring holes assist in gathering stranded wires for faster, more secure connections.
- All terminal (H-N-G) and mounting screws triple combination (slot/Phillips/Robertson) head for maximum installer flexibility.
- Long, broad mounting strap helps reach large panel cutouts for Code Compliance.
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper used.
- Screw-Catch™ feature on duplex devices speeds mounting of wallplates.

### Back and Side Wire

Rating A	V/AC	NEMA	Colors	Catalog No.	
				Duplex	Single*
15	125	5-15R	Brown	5262B	5261B
			Gray	5262GY	5261GY
			Ivory	5262V	5261V
			Red	5262RD	—
			White	5262W	5261W
20	125	5-20R	Brown	5362B	5361B
			Gray	5362GY	5361GY
			Ivory	5362V	5361V
			Red	5362RD	—
			White	5362W	5361W
15	250	6-15R	Brown	5662B	5661B
			Gray	5662GY	—
			Ivory	5662V	5661V
			White	5662W	5661W
20	250	6-20R	Brown	5462B	5461B
			Gray	5462GY	5461GY
			Ivory	5462V	5461V
			White	5462W	5461W

\*Single receptacles meet all UL, CSA & Federal Specifications, but differ in design and construction from duplexes noted above.



5-15R



5-20R



6-15R



6-20R