


Multilayer Ceramic Chip Capacitor

Part Number: C06CF0R5A-9UN-X1T

Description: C06 250V 0.5pF $\pm 0.05\text{pF}$ NP0 Porcelain - Hi Q Single-side marked

A range of high frequency, High Q capacitors for multiple challenging applications such as DC Blocking, Impedance Matching, Coupling, Bypass and Frequency Discrimination (Filtering). The CF Ultra Temperature Stable range is designed for temperature sensitive, frequency sensitive and time sensitive applications.

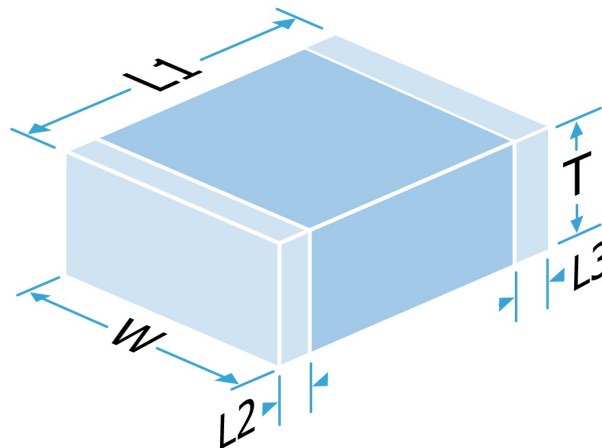

Mechanical Specification

Size Code	C06 (0603 package)
Length (L1) in mm (")	1.532 $\pm$ 0.229 (0.06 $\pm$ 0.009)
Width (W) in mm (")	0.77 $\pm$ 0.191 (0.031 $\pm$ 0.008)
Thickness (T) in mm (")	0.8 Max (0.032 Max)
Minimum Termination Band (L2,L3) in mm (")	0.169 (0.007)
Maximum Termination Band (L2,L3) in mm (")	0.68 (0.027)
Termination Material	Nickel Barrier, Sn/Pb Plated Solder (Contains Lead, non RoHS)
Solderability	Per MIL-STD-202, Method 208
Packaging	7" Reel Horizontal Orientation, 4000 per reel

General Electrical Specification

Rated Voltage	250Vdc
Nominal Capacitance Value	0.5pF
Capacitance Tolerance	$\pm 0.05\text{pF}$
Tangent of Loss Angle (Tan δ)	≤ 0.0005
Capacitance and Tan δ Test Conditions	1.0Vrms @ 1MHz
Voltage Proof	625Vdc (375Vdc if marked)
(Voltage applied for 5 secs max. @ 50mA max. charge current)	
Min Insulation Resistance (IR)	1000.00GOhm @ 250Vdc
Dielectric Classification	NP0 Porcelain - Hi Q
Rated Temperature Range	-55°C / +125°C
Maximum Capacitance Change over Temperature Range	No DC Voltage 0 $\pm$ 15ppm/°C Rated DC Voltage -
Climatic Category (IEC)	-
Ageing Characteristic	Zero

Knowles Precision Devices - Sales

Europe: KPD-Europe-sales@knowles.com

Asia: KPD-Asia-sales@knowles.com

USA: KPD-NA-sales@knowles.com

www.knowlescapacitors.com

This datasheet is for a standard item and is confirmed valid on the date generated, the latest published data for this part may differ and is available at <http://www.knowlescapacitors.com> or by contacting us.

© The information contained on this drawing is confidential and may not be copied in whole or part in any form or disclosed to a third party without the consent of Knowles and any customer mentioned within this specification.

Data is correct to the best of our knowledge, errors and omissions excepted.

Date: Tuesday, July 23, 2019

20190723 012333999UTC

Multilayer Ceramic Chip Capacitor

Part Number: C06CF0R5A-9UN-X1T

Description: C06 250V 0.5pF ± 0.05 pF NP0 Porcelain - Hi Q Single-side marked

Environmental

RoHS Compliant to 2011/65/EC as amended by 2015/863/EU

Non Compliant

REACH Compliant

Contains lead (CAS 7439-92-1)

California Proposition 65

Risk of exposure to lead (CAS 7439-92-1)


Board Layout

Knowles' conventional 2-terminal chip capacitors can generally be mounted using pad designs in accordance with international specification IPC-7351, Generic Requirements for Surface Mount Design and Land Pattern Standards, but there are some other factors that have been shown to reduce mechanical stress, such as reducing the pad width to less than the chip width. In addition, the position of the chip on the board should be considered.

Some high voltage parts may require modifications to the board layout and/or the addition of a conformal coating to prevent flashover. Refer to application note AN0043 for further information.

IPC-7351 pad design


	C06 (0603 package)	
C	1.20mm	0.047"
Y	0.97mm	0.038"
X	0.99mm	0.039"



Packaging

Tape packaging information for tape-and-reel parts:

Tape and reel packing of surface mounting chip capacitors for automatic placement are in accordance with IEC60286-3.

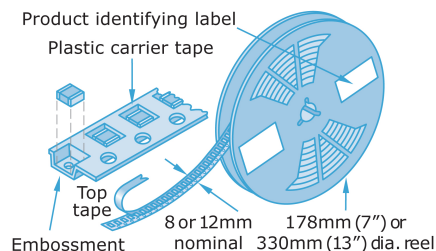

Soldering


Reflow solder in accordance with IPC-A-610. Recommended reflow profile as laid down in IPC/JEDEC J-STD-020.

Wave soldering is also possible, but care must be taken for case sizes 1210 and larger and component thickness >1.0mm. Trials are encouraged.

Hand soldering is not recommended and can lead to component damage through thermal shock.

PdAg terminations are primarily intended for conductive epoxy attachment - they may be suitable for soldering but trials are recommended.

Application notes with mounting and handling guidance are available on request.

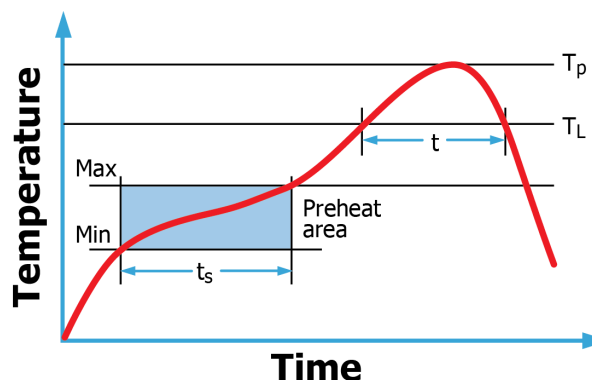

Compex

DLI

Johanson MFG

Novacap

Syfer

Voltronics

Knowles Precision Devices - Sales

Europe: KPD-Europe-sales@knowles.com

Asia: KPD-Asia-sales@knowles.com

USA: KPD-NA-sales@knowles.com

www.knowlescapacitors.com

This datasheet is for a standard item and is confirmed valid on the date generated, the latest published data for this part may differ and is available at <http://www.knowlescapacitors.com> or by contacting us.

© The information contained on this drawing is confidential and may not be copied in whole or part in any form or disclosed to a third party without the consent of Knowles and any customer mentioned within this specification.

Data is correct to the best of our knowledge, errors and omissions excepted.

Date: Tuesday, July 23, 2019

20190723 012333999UTC