


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205–HS
INSULATOR: HEAT SHRINK TUBING. BLACK.
BODY: NICKEL UNDERPLATED BRASS.
CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.
GOLD FLASH BeCu SPRING.
2. P/N: W–200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 1000 W.V.D.C.

MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

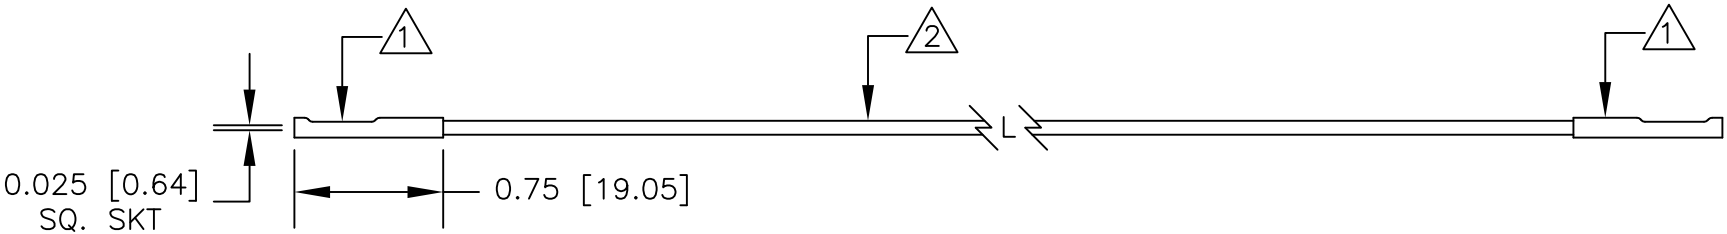

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
			APPROVALS	DATE	DESCRIPTION 0.025 [0.64] SQ. SOCKET (9205–HS) JUMPER			
			DRAWN R.L.	11/12				
		MATERIAL SEE NOTE.	APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
		FINISH SEE NOTE.			B	08505	9110	
NEXT ASSY	USED ON				SCALE	1:1		
APPLICATION		DO NOT SCALE DRAWING			SHEET 1 OF 1			