
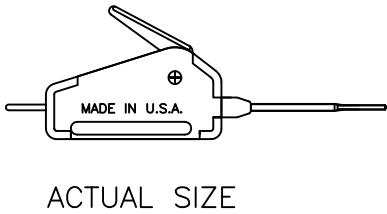
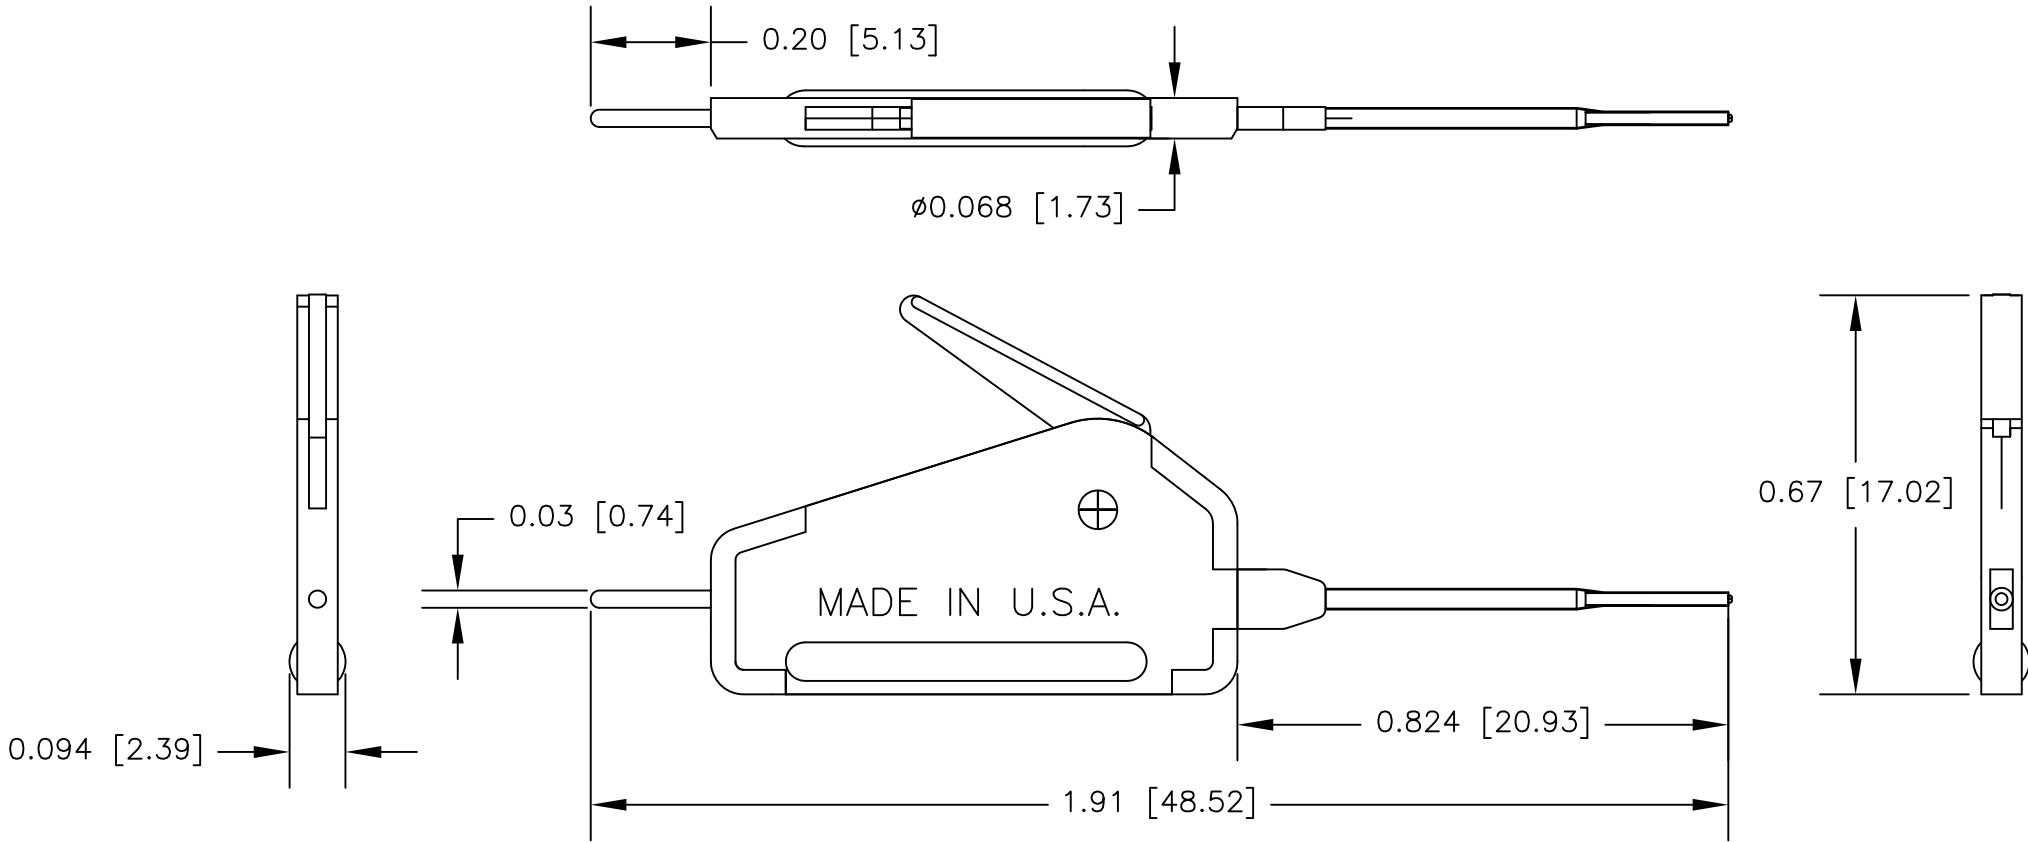


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS
SPRING & TUBE: PASSIVATED SS
CONTACT: MUSIC WIRE
PIN: GOLD PLATED COPPER ALLOY
HS: CLEAR POLYESTER
2. PERFORMANCE:
MAXIMUM CURRENT: 500 mA
MAXIMUM VOLTAGE: < 33 VAC < 70VDC
MAXIMUM TEMPERATURE: 200°F (93°C)
3. FEATURES:
THIN CLIP BODY WIDTH ALLOWS MANY PQFP CLIPS
TO BE MOUNTED SIDE BY SIDE AND SIMULTANEOUSLY
TESTED. USED WITH PQFP PACKAGES TO 0.5MM LEAD
PITCH.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

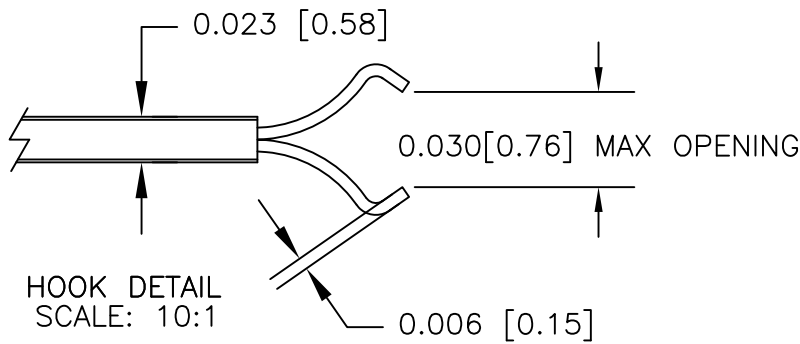

ACTUAL SIZE

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.					
				APPROVALS	DATE	DESCRIPTION MICRO DOUBLE HOOK				
				DRAWN	R.L.					
		MATERIAL SEE NOTE.	APPROVED BY							
						SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 X2015				
		FINISH SEE NOTE.								
NEXT ASSY	USED ON									
APPLICATION		DO NOT SCALE DRAWING			SCALE		3:1		SHEET 1 OF 1	