

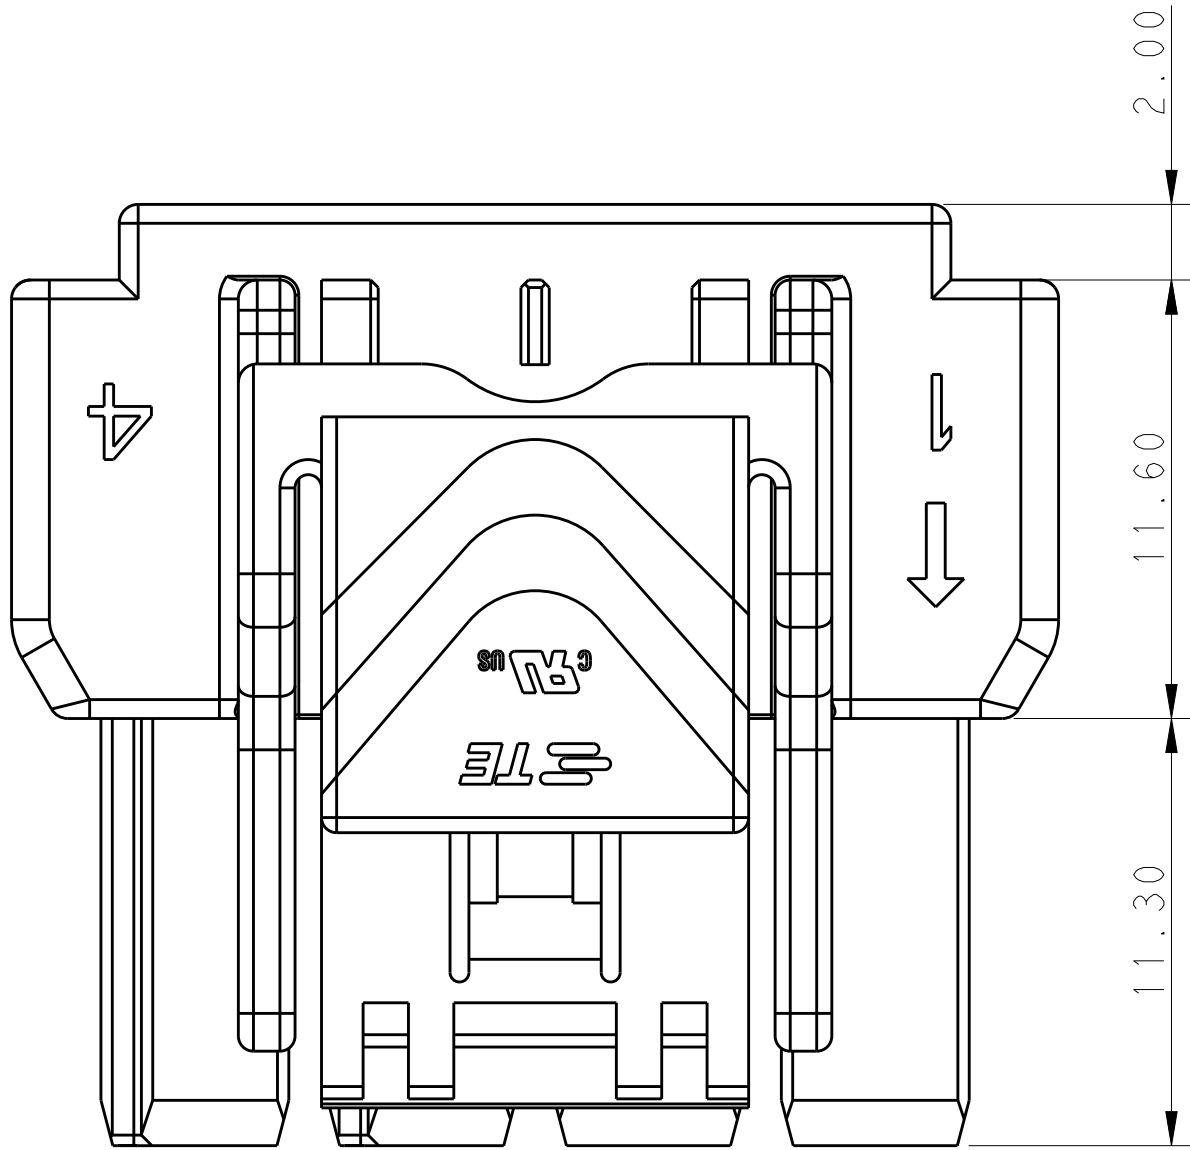
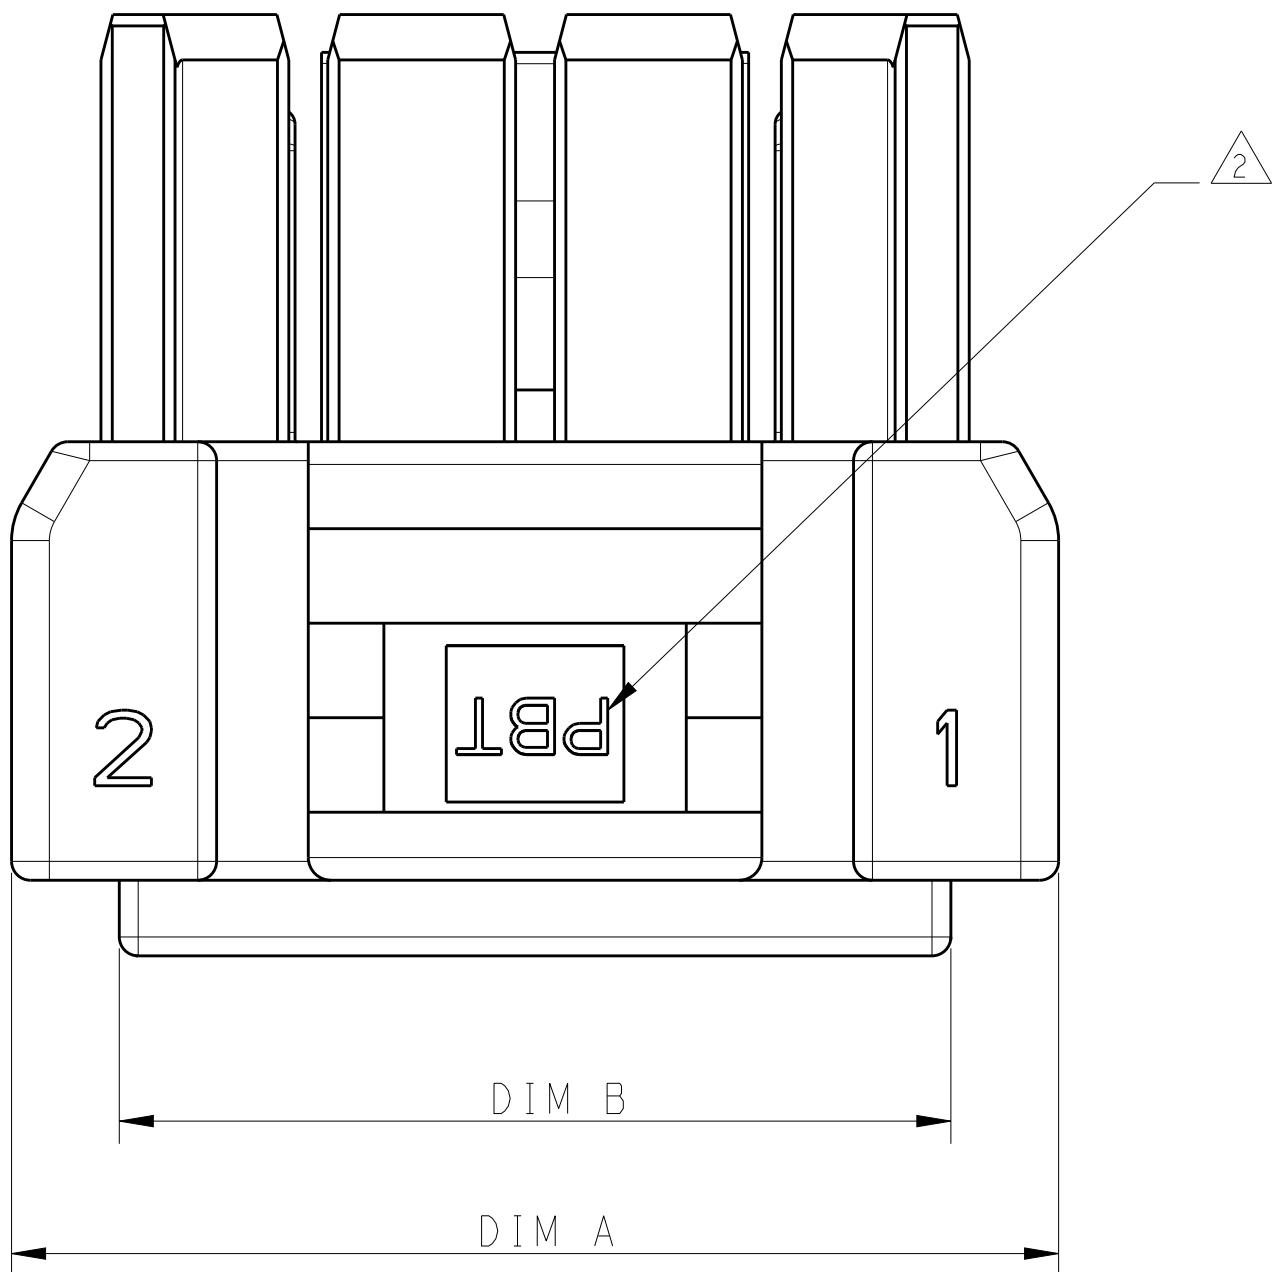
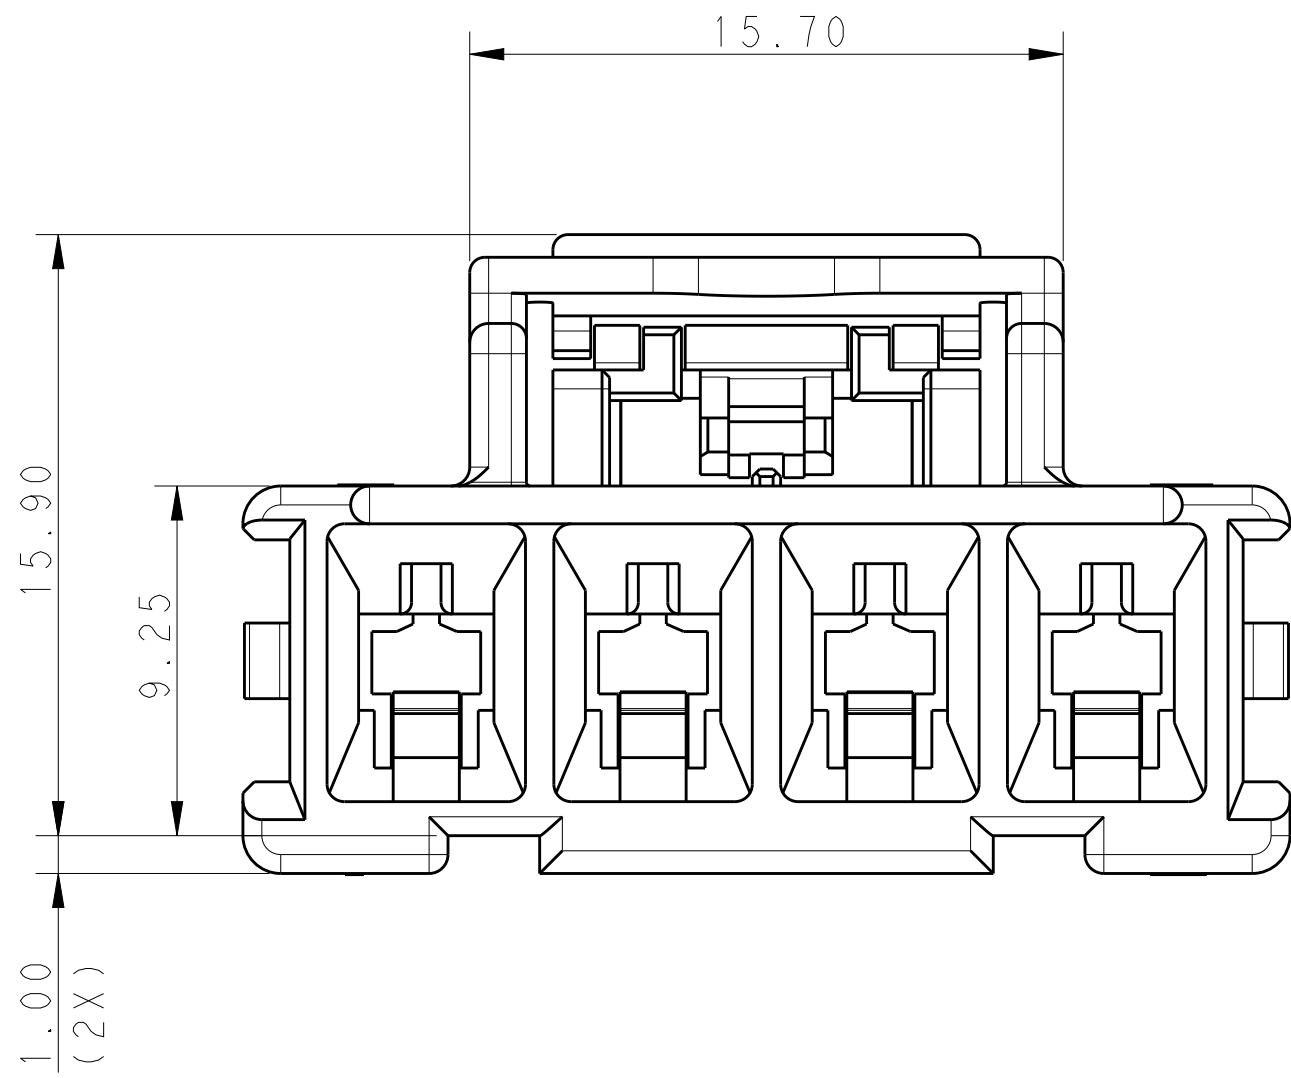


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		E1		REVISED PER ECO-19-011745	30JUL2019	RS	DS

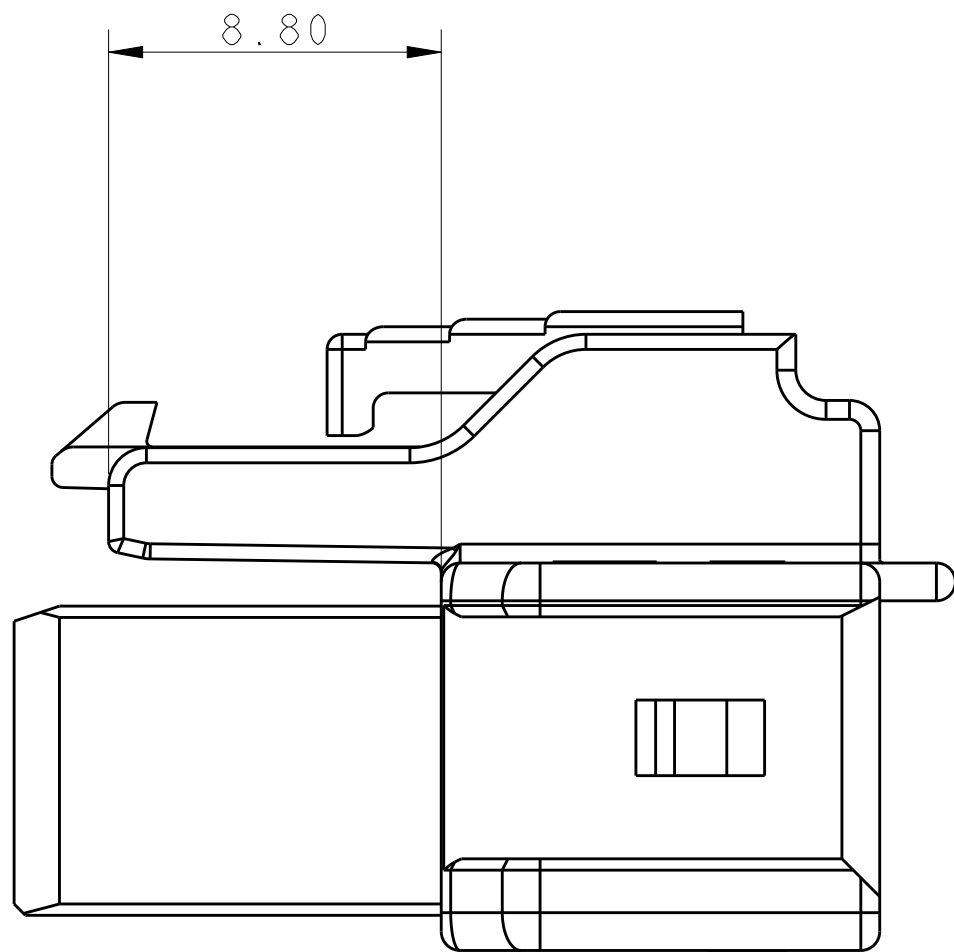

POS.	DIM.A	DIM.B
1*5	33.7	28.0
1*4	27.7	22.0
1*3	21.7	16.0
1*2	15.7	10.0

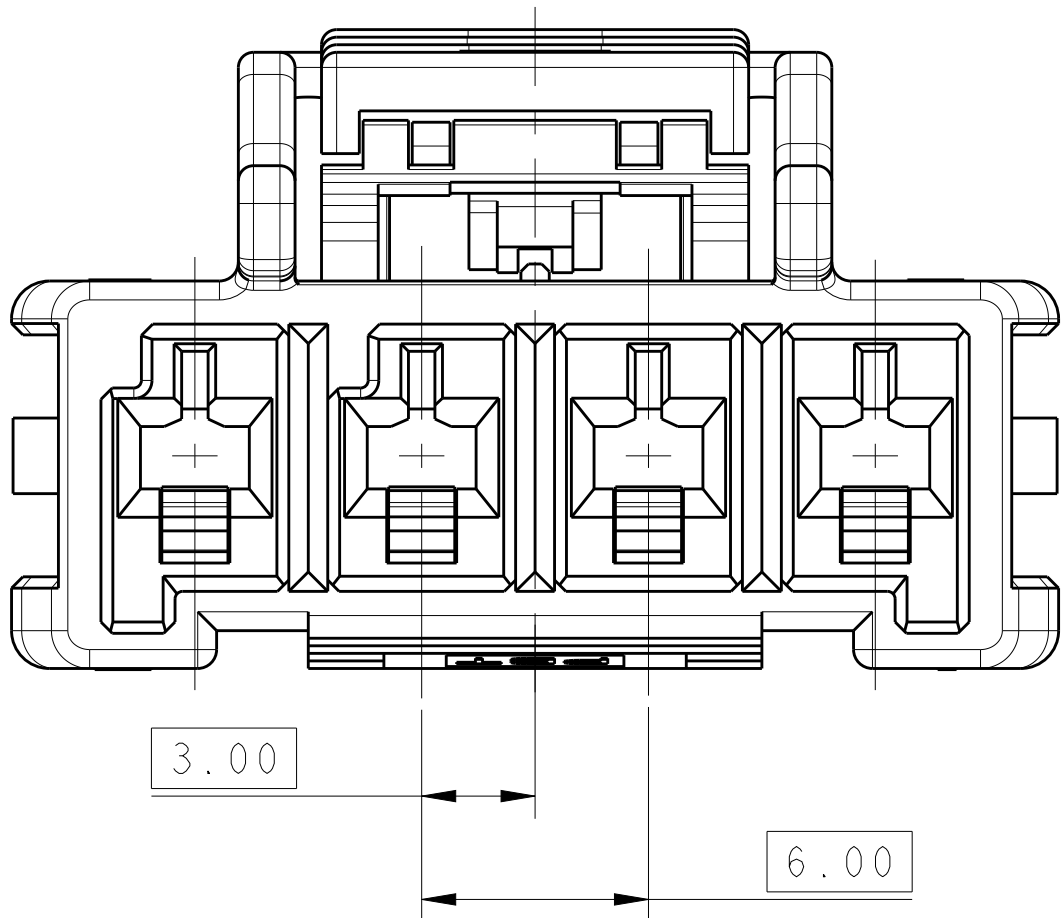

1 MATERIAL:
LEVEL 1: PBT GLASS FILLED,STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW

LEVEL 2: NYLON (PA 66),HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D:NATURAL

2 MATERIAL MARK:
LEVEL 1: PBT,LEVEL 2:HDT

3 APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-* , 2238066-*

4 MATING CONN, P/N
CAP HSG: *-1971772-* AND HEADERS: *-1969688-*, *-1969694-
TPA (LOCKING PLATE): *-1971777-*









5 FLAMMABILITY RATED UL94 V-0

6 GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1
THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST
AND A RESIN GWIT >=775°C

7 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY.WU 09JUL2012	TE Connectivity	
DIMENSIONS:		CHK HAPYE.WU 09JUL2012		
mm		APVD YUZHONG.MAO 09JUL2012	NAME	
		PRODUCT SPEC	PLUG HOUSING, SINGLE ROW	
		108-106118	POWER TRIPLE LOCK	
		APPLICATION SPEC	-	
		114-106118	SIZE	
MATERIAL		WEIGHT	A100779C=1971773	
		Customer Drawing	RESTRICTED TO	
		SCALE 5:1	SHEET 1 OF 2	
			REV E1	

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

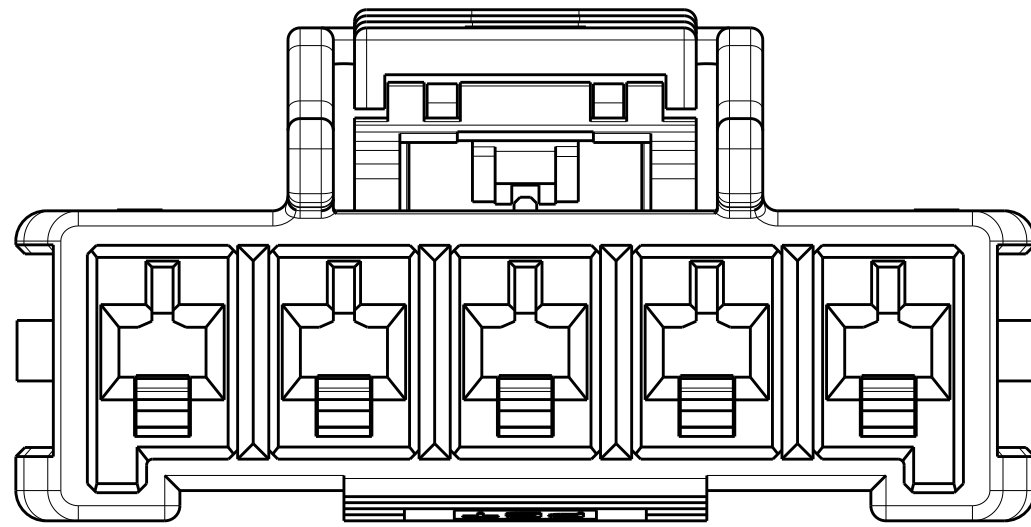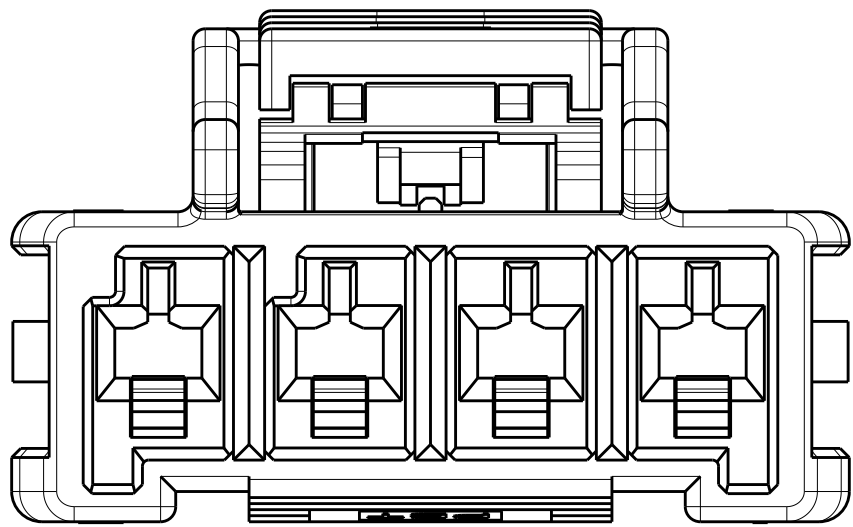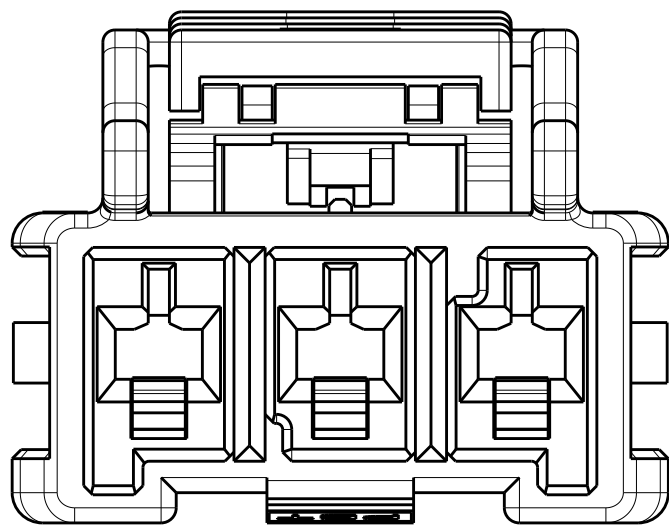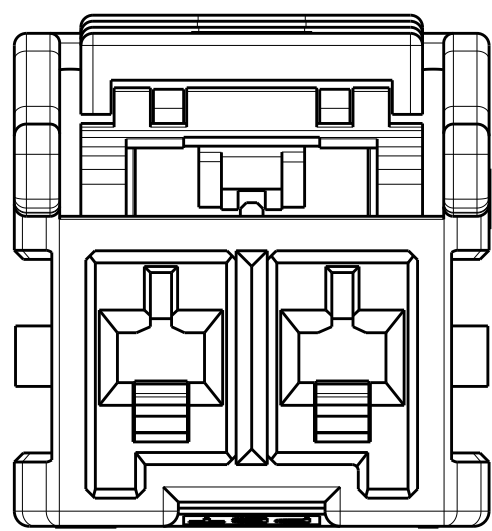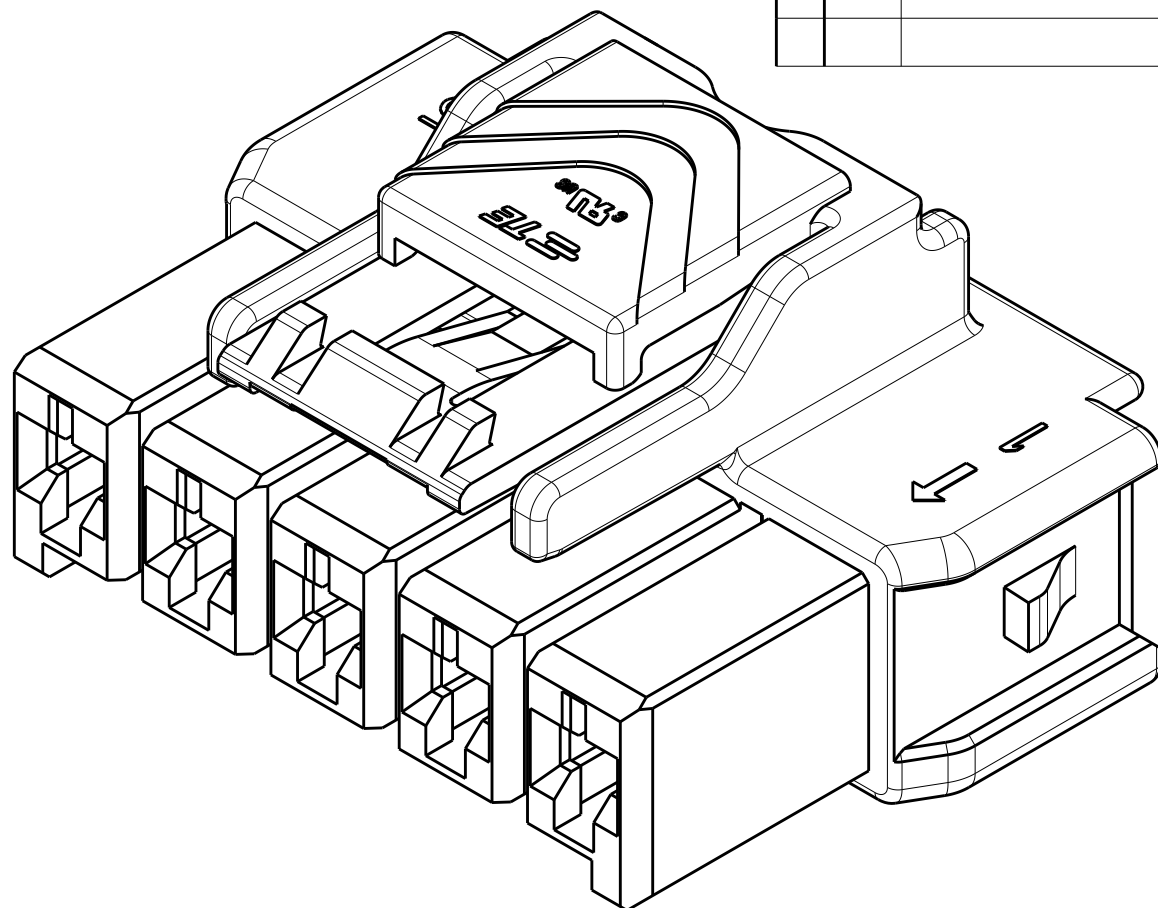
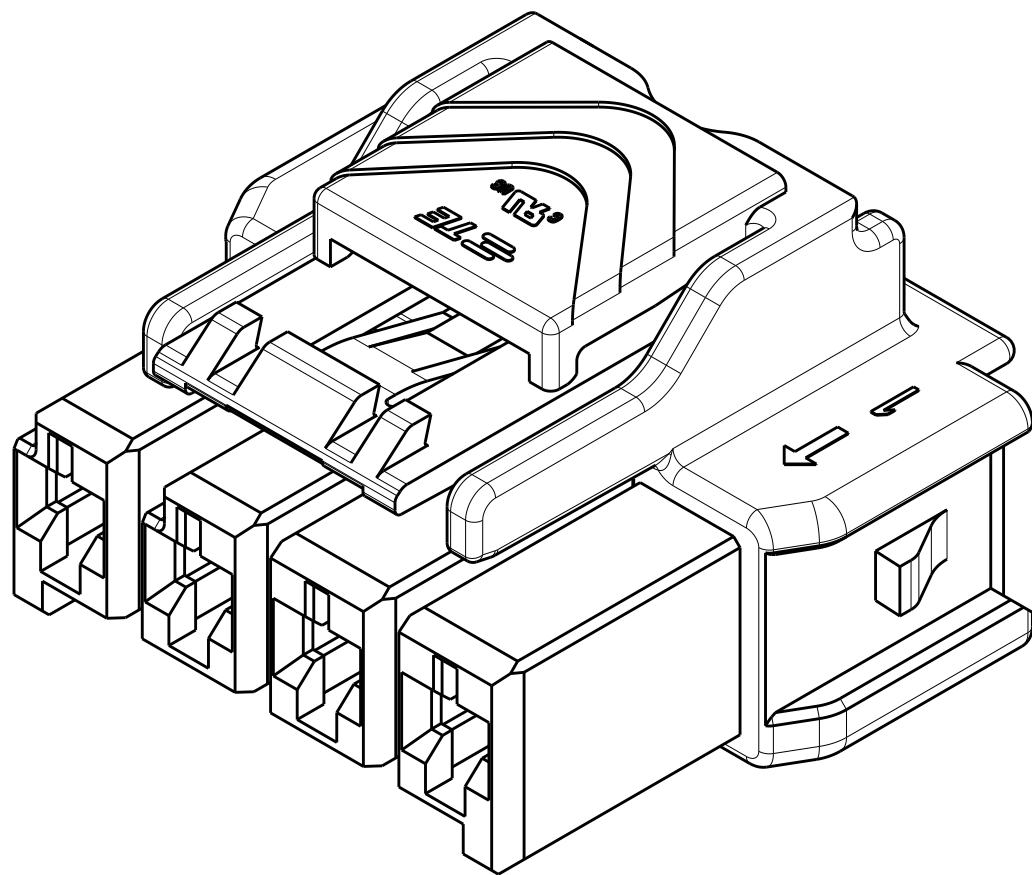
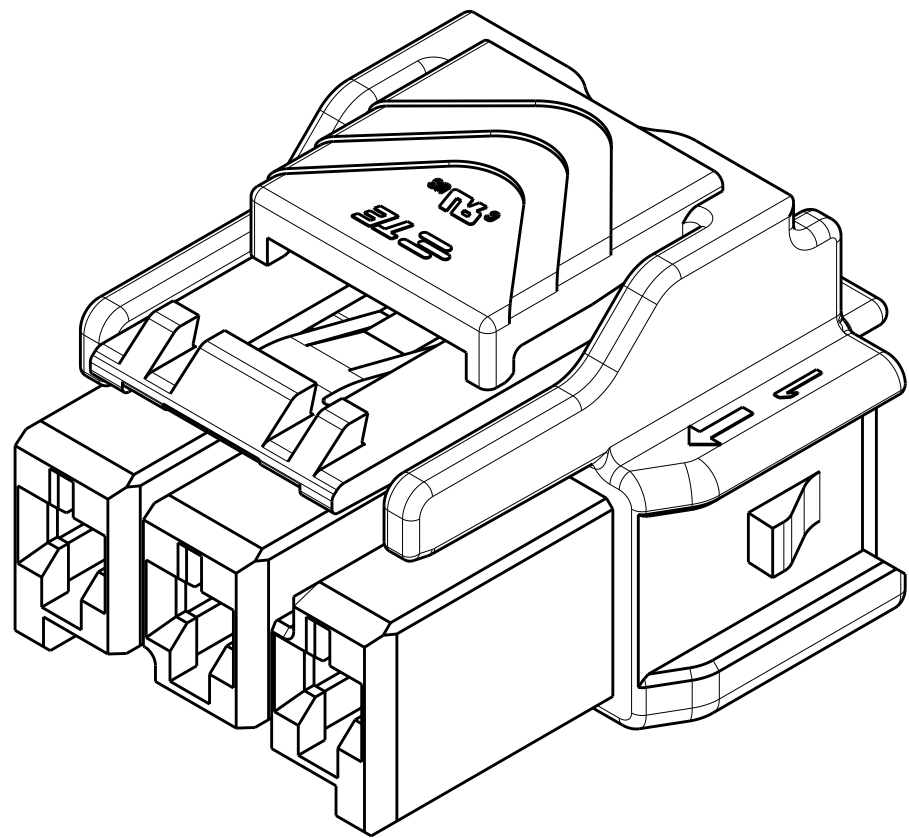
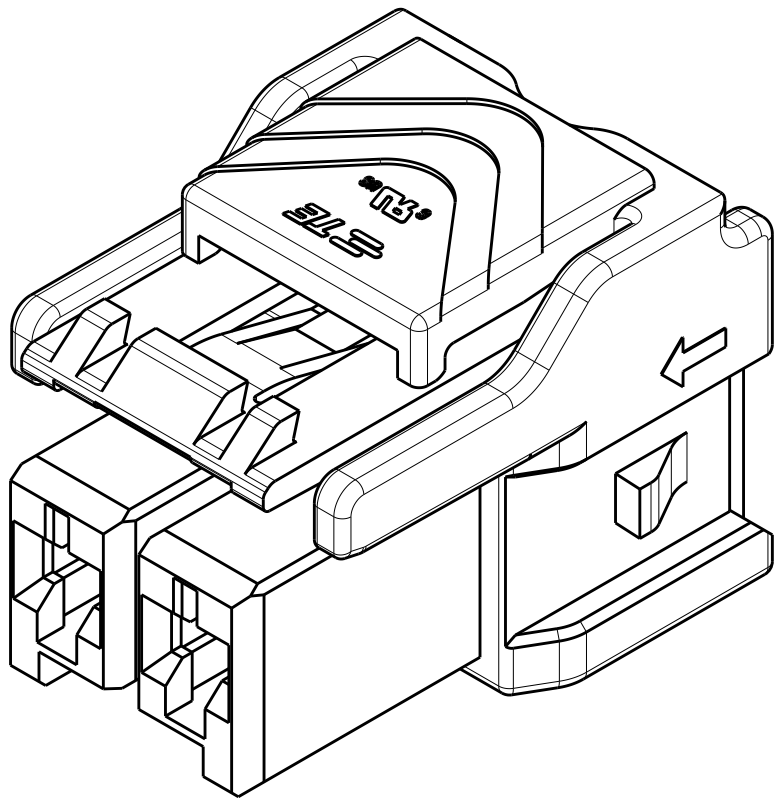


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

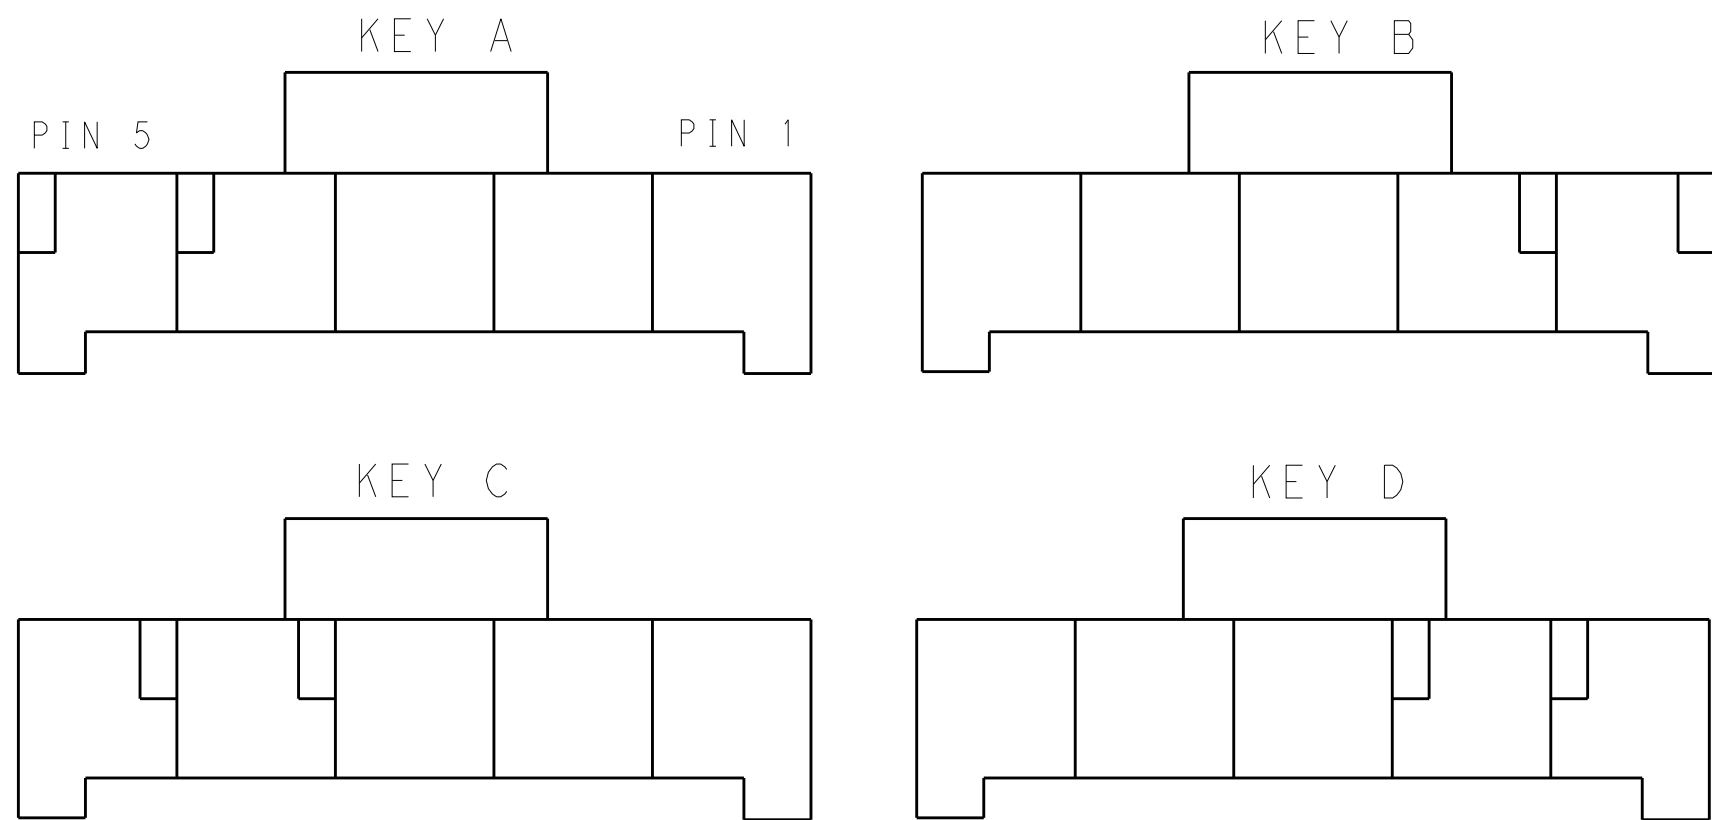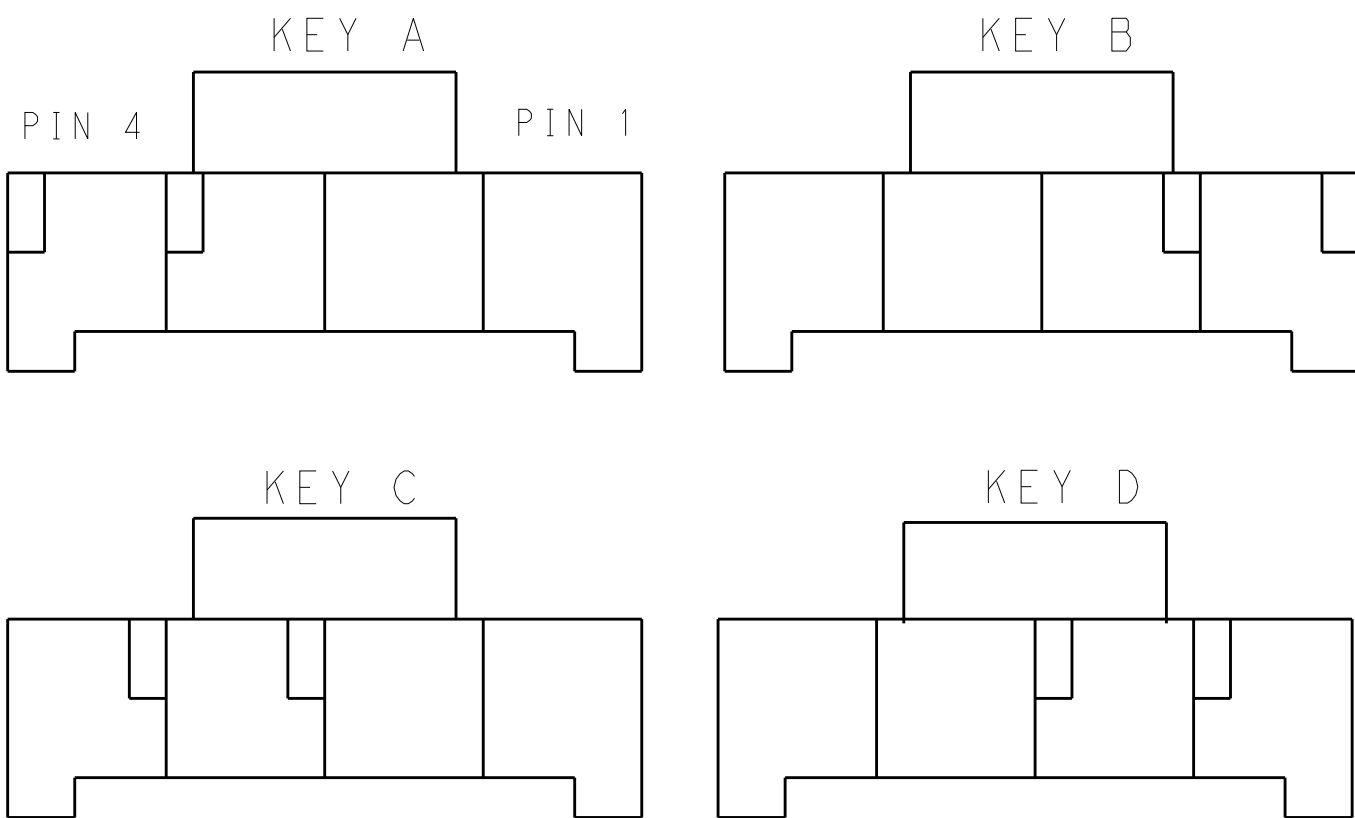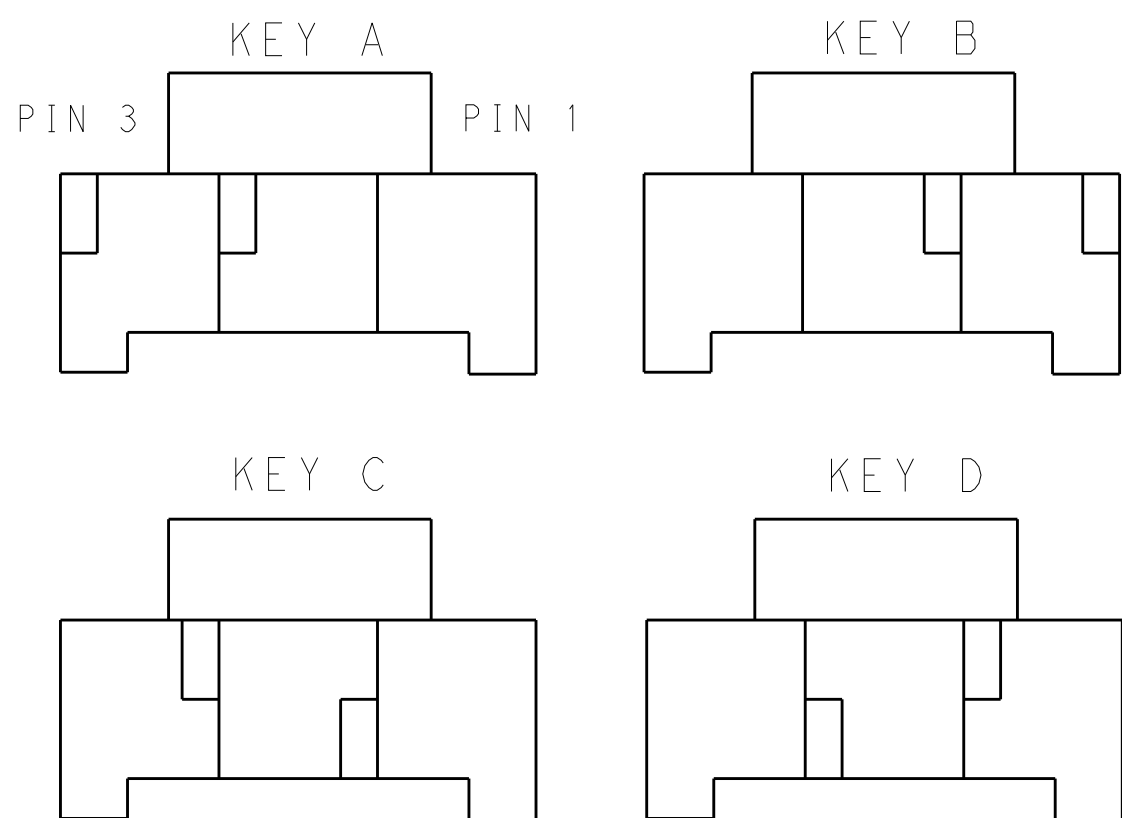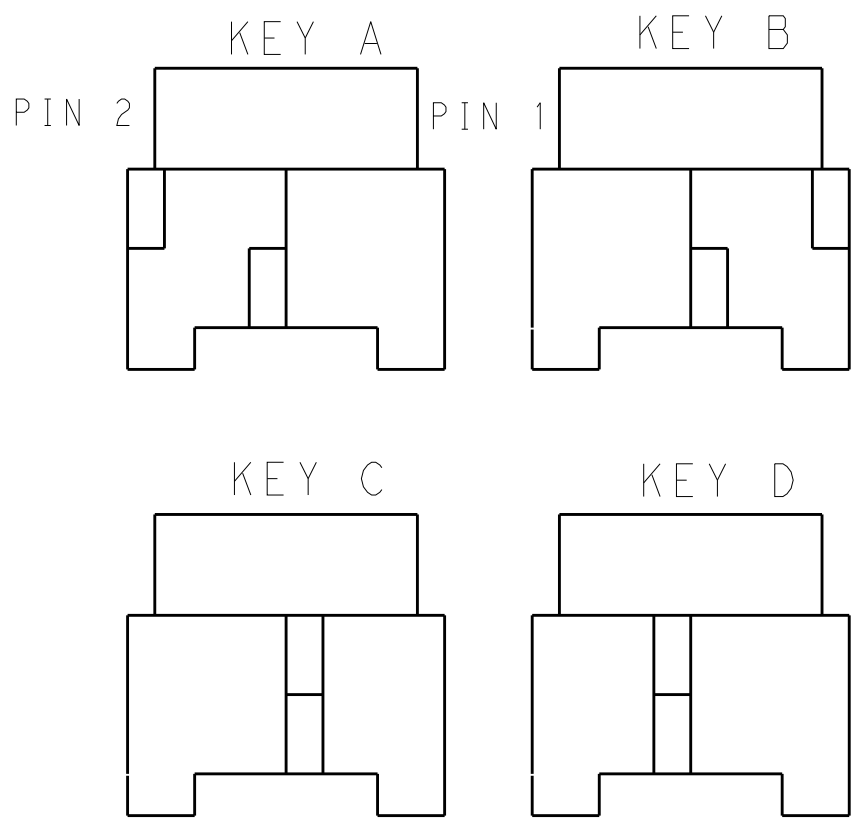

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*3	LEVEL 1	KEY A	1-1971773-3
		KEY B	2-1971773-3
		KEY C	3-1971773-3
		KEY D	4-1971773-3
	LEVEL 2	KEY A	5-1971773-3
		KEY B	6-1971773-3
		KEY C	7-1971773-3
		KEY D	8-1971773-3
1*2	LEVEL 1	KEY A	1-1971773-2
		KEY B	2-1971773-2
		KEY C	3-1971773-2
		KEY D	4-1971773-2
	LEVEL 2	KEY A	9-1971773-2
		KEY B	6-1971773-2
		KEY C	7-1971773-2
		KEY D	8-1971773-2
POS.	MATERIAL	KEY	P/N

1*5	LEVEL 1	KEY A	1-1971773-7
		KEY B	2-1971773-7
		KEY C	3-1971773-7
		KEY D	4-1971773-7
	LEVEL 2	KEY A	5-1971773-7
		KEY B	6-1971773-7
		KEY C	7-1971773-7
		KEY D	8-1971773-7
1*4	LEVEL 1	KEY A	1-1971773-4
		KEY B	2-1971773-4
		KEY C	3-1971773-4
		KEY D	4-1971773-4
	LEVEL 2	KEY A	5-1971773-4
		KEY B	6-1971773-4
		KEY C	7-1971773-4
		KEY D	8-1971773-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	09JUL2012	TE Connectivity		
DIMENSIONS:		CHK	HAPYE WU	09JUL2012			
mm		APVD	YUJHONG MAO	09JUL2012	NAME		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC		
		0 PLC ±-			108-106118		
		1 PLC ±0.35			APPLICATION SPEC		
		2 PLC ±0.25			114-106118		
MATERIAL		FINISH			WEIGHT		
-		-			-		
		Customer Drawing			SIZE		
					A100779C=1971773		
					RESTRICTED TO		
					-		
					SCALE		
					5:1		
					SHEET		
					2 OF 2		
					REV		
					E1		