




.100" [2.54 mm] Contact Centers, Shrouded (Box) Headers, Straight/Right Angle/SMT - SBH11 Series Mates with SFH11 series, SFH210 series and SFH213 series

SPECIFICATIONS


- Centered Polarizing Notch
- Operating Temperature: -40°C to +105°C
- Processing Temperature: 230°C Max. for 60 seconds
(260°C Max. for 10 seconds)
- UL Flammability Rating: 94V-0
- Voltage Rating: 20 milli Ohms Max.
- Current Rating: 3 Amps
- Dielectric Withstanding: 1000 VAC
- Insulation Resistance: 5000 Megohms Min.

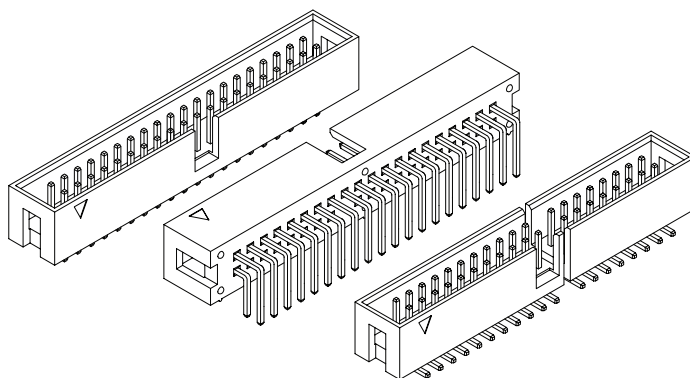

PART NUMBER OPTIONS


SBH11 - P B P C - D 10 - ST - BK									
SERIES			INSULATOR MATERIAL			CONTACT MATERIAL			COLOR
SBH11 = Box Header, .100" [2.54 mm] Contact Centers by .100" [2.54 mm] Row Spacing			P = PBT N or G = Nylon			B = Brass			BK = Black Other Color Options Available (Consult Factory)
CONTACT FINISH - RoHS Compliant			CONTACT CENTERS			TERMINATION TYPE			NUMBER OF CONTACT POSITIONS (Pins per Row)
P = Gold Flash Overall			C = .100" [2.54 mm]			ST = Straight RA = Right Angle SM = Surface Mount SP = Surface Mount with Guide Posts			03 thru 08, 10, 12, 13, 15, 17, 20, 22, 25, 30, 32
						NUMBER OF ROWS			D = Dual Row

DIMENSIONS For complete drawings, go to www.sullinscorp.com or e-mail techsupport@sullinscorp.com
Dimensions in [] are in millimeters, all others are in inches.




STRAIGHT (ST)

Example P/N: SBH11-PBPC-D20-ST-BK



RIGHT ANGLE (RA)

Example P/N: SBH11-PBPC-D20-RA-BK



SURFACE MOUNT (SM)

Example P/N: SBH11-NBPC-D20-SM-BK

