


Features

- Rated voltage 275Vac (UL, CSA 250V).
- IEC/EN 60384-14 class X2.


Applications

- Designed mainly for suppressing noise occurring in power line of electrical appliances.


Dimensions

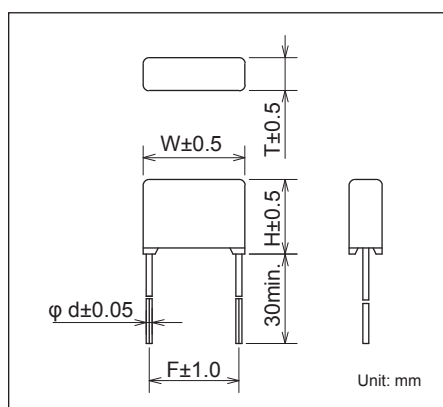


Safety Standard	File No.
UL	:UL-60384-14 E47474
cUL	:CSA E60384-14 E47474
CSA	:CSA E60384-14, C22.2 No.8 LR37404, LR104926
VDE	:IEC/EN 60384-14 40018318, 40017808
SEMKO	:IEC/EN 60384-14 917611, 1111621
NEMKO	:IEC/EN 60384-14 P08209479, P06206040
DEMKO	:IEC/EN 60384-14 315316-01, D-00242
FIMKO	:IEC/EN 60384-14 FI25733, FI27268
Electrosuisse	:IEC/EN 60384-14 12.0939, 12.0937

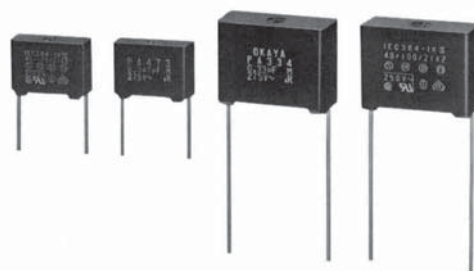

Circuit



Model numbering system

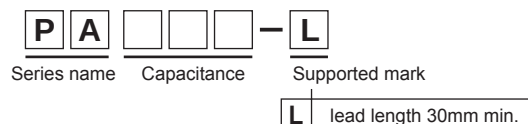

Electrical Specifications

Rated Voltage **275Vac (UL, CSA: 250V)**

Safety Standard	Class	Model Number	Capacitance μF±20%	Dimensions					Dissipation Factor	Test Voltage	Insulation Resistance			
				W	H	T	F	d						
       	X2	PA103-L	0.01	17.0	12.0	5.0	15.0	0.6	0.01max. (at 1kHz)	Line to Line 1,250Vac 50/60Hz 60sec Line to Case 2,000Vac 50/60Hz 60sec	Line to Line 103~334 15,000MΩmin. 474~225 5,000Ω•Fmin Line to Case 100,000MΩmin. (at 500Vdc)			
		PA123-L	0.012											
		PA153-L	0.015											
		PA183-L	0.018											
		PA223-L	0.022											
		PA273-L	0.027											
		PA333-L	0.033		12.5	5.5	22.5	0.8						
		PA393-L	0.039											
		PA473-L	0.047											
		PA563-L	0.056											
		PA683-L	0.068											
		PA823-L	0.082											
		PA104-L	0.1	25.0	16.0	6.5	27.5					1.0		
		PA124-L	0.12											
		PA154-L	0.15											
		PA184-L	0.18											
		PA224-L	0.22											
		PA274-L	0.27	30.0	17.0	8.5	27.5						37.5	
		PA334-L	0.33	25.0	19.5	10.0	22.5							
		PA394-L	0.39	30.0	22.0	11.0	27.5							
		PA474-L	0.47		24.5	13.5								
		PA564-L	0.56		30.5	28.0		16.0						
		PA684-L	0.68											41.0
		PA824-L	0.82											
		PA105-L	1.0											
PA125-L	1.2													
PA155-L	1.5	28.0	15.5	37.5										
PA185-L	1.8													
PA225-L	2.2													

Operating Temperature: -40~+100°C