


Polyester Film Capacitors

KT Radial Epoxy Lacquered Type

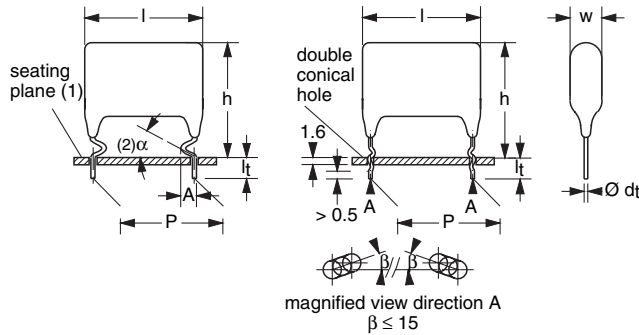

Dimensions in mm

- (1) Hole $\varnothing 0.8$ for $d_t = 0.6$ mm
Hole $\varnothing 1.0$ for $d_t = 0.8$ mm
- (2) $0 \leq \alpha < 50^\circ$
- (3) $A = 2.0 \pm 0.5$ mm (pitch = 10.0 mm)
 $A = 3.5 \pm 1.0$ mm (pitch = 15.0 mm)

APPLICATIONS

Consumer and industrial. Especially where high currents and/or steep pulses occur. DC or AC voltage

MARKING

Manufacturer emblem; C-value; tolerance; rated voltage; code for dielectric material; code for factory of origin

DIELECTRIC

Polyester film

ELECTRODES

Aluminum foil

COATING

Flame retardant epoxy material (UL-class 94 V-0)

CONSTRUCTION

Film/foil mono construction

LEADS

Tinned wire

FEATURES

- 10 to 15 mm lead pitch. Supplied loose in box
- Lead (Pb)-free product
- RoHS-compliant product



RoHS
COMPLIANT

CAPACITANCE RANGE (E12 SERIES)

0.001 to 0.47 μ F

CAPACITANCE TOLERANCE

$\pm 20\%$; $\pm 10\%$

RATED (DC) VOLTAGE

100 V; 250 V; 400 V; 630 V

RATED (AC) VOLTAGE

50 V; 80 V; 125 V; 200 V

CLIMATIC CATEGORY

40/100/21

RATED TEMPERATURE

85 $^\circ$ C

MAXIMUM APPLICATION TEMPERATURE

100 $^\circ$ C

REFERENCE SPECIFICATIONS

IEC 60384-11

PERFORMANCE GRADE

Grade 1 (long life)

DETAIL SPECIFICATION

For more detailed data and test requirements contact:

filmcaps.roeselare@vishay.com

Polyester Film Capacitors
KT Radial Epoxy Lacquered Type

Vishay BCcomponents

COMPOSITION OF CATALOG NUMBER

TYPE AND PITCHES	
347	10.0 mm
	15.0 mm

CAPACITANCE (numerically; but not for lock lead)
--

MULTIPLIER (nF)	
0.1	2
1	3
10	4
100	5

Example:

$$104 = 10 \times 10 = 100 \text{ nF}$$

2222	347	XX	XX	X
BFC2*	347	XX	XX	X

* Use this partnumber for those with access to the Vishay's SAP system and Partners website within the Americas

TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES				
			C-TOL	100 V	250 V	400 V	630 V
347	loose in box	lead length 4.0 + 1.0/- 0.5 mm	± 10 %	21	41	51	61
	loose in box (lock lead)	lead length 4.0 + 1.0/- 0.5 mm	± 10 %	90	90	90	90
			height dimensions given in parenthesis				
			ON REQUEST				
347	loose in box	lead length 4.0 + 1.0/- 0.5 mm	± 20 %	20	40	50	60

SPECIFIC REFERENCE DATA

DESCRIPTION	VALUE			
Tangent of loss angle: $C \leq 0.47 \mu\text{F}$	at 1 kHz		at 10 kHz	
	$\leq 60 \times 10^{-4}$		$\leq 110 \times 10^{-4}$	
Rated voltage pulse slope $(dU/dt)_R$	at 100 V (DC)	at 250 V (DC)	at 400 V (DC)	at 630 V (DC)
	10 000 V/ μs	10 000 V/ μs	10 000 V/ μs	10 000 V/ μs
R between leads, for $C \leq 0.33 \mu\text{F}$ at 100 V; 1 minute	> 50 000 M Ω	> 50 000 M Ω	> 50 000 M Ω	> 50 000 M Ω
RC between leads, for $C > 0.33 \mu\text{F}$ at 100 V; 1 minute	> 16 500 s	> 16 500 s		
R between interconnected leads and case (foil method)	> 30 000 M Ω			
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	200 V; 1 minute	500 V; 1 minute	800 V; 1 minute	1260 V; 1 minute
Withstanding (DC) voltage between leads and case	200 V; 1 minute	500 V; 1 minute	800 V; 1 minute	1260 V; 1 minute

$U_{Rdc} = 100 \text{ V}; U_{Rac} = 50 \text{ V}; U_{p-p} = 140 \text{ V}$

C (μF)	DIMENSIONS wmax × Hmax × Lmax (mm)	MASS (g)	CATALOG NUMBER 2222 347 AND PACKAGING			
			LOOSE IN BOX; It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ	C-tol = ± 10 %	SPQ
			last 5 digits of catalog number		last 5 digits of catalog number	
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm					lock lead	
0.015	5.5 × 13.0 (16.0) × 13.5	0.7	21153	1250	90238	1250
0.018			21183		90239	
0.022			21223		90241	
0.027			21273		90242	
0.033	6.0 × 13.5 (16.5) × 13.5	0.7	21333	2000	90236	2000
0.039	6.5 × 14.0 (17.0) × 13.5	0.8	21393	1750	90243	1750
0.047	7.0 × 14.5 (17.5) × 13.5	0.9	21473	1750	90244	1750
Pitch = 15.0 ± 0.4 mm; d _t = 0.80 ± 0.08 mm					lock lead	
0.056	5.5 × 14.0 (17.0) × 19.0	1.2	21563	1500	90245	1500
0.068	6.0 × 14.5 (17.5) × 19.0	1.3	21683	1500	90235	1500
0.082	7.0 × 15.5 (18.5) × 19.0	1.5	21823	1250	90212	1250
0.1	7.5 × 16.0 (19.0) × 19.0	1.7	21104	1000	90224	1000
0.12	8.0 × 16.5 (19.5) × 19.0	1.9	21124	1000	90246	1000
0.15	8.5 × 17.0 (20.0) × 19.0	2.3	21154	900	90247	900

 $U_{Rdc} = 250 \text{ V}; U_{Rac} = 80 \text{ V}; U_{p-p} = 225 \text{ V}$

C (μF)	DIMENSIONS wmax × Hmax × Lmax (mm)	MASS (g)	CATALOG NUMBER 2222 347 AND PACKAGING			
			LOOSE IN BOX; lt = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ	C-tol = ± 10 %	SPQ
			LAST 5 DIGITS OF CATALOG NUMBER		LAST 5 DIGITS OF CATALOG NUMBER	
Pitch = 10.0 ± 0.4 mm; dt = 0.60 ± 0.06 mm					lock lead	
0.0082 0.01 0.012 0.015	5.5 × 13.0 (16.0) × 13.5	0.7	41822	2000	90255	1250
			41103		90256	
			41123		90257	
			41153		90258	
0.018	6.0 × 13.5 (16.5) × 13.5	0.7	41183	2000	90259	2000
0.022	6.5 × 14.0 (17.0) × 13.5	0.8	41223	2000	90225	1750
0.027	7.0 × 14.5 (17.5 × 13.5	0.9	41273	2000	90261	1750
Pitch = 15.0 ± 0.4 mm; dt = 0.80 ± 0.08 mm					lock lead	
0.033	5.5 × 14.0 (17.0) × 19.0	1.1	41333	2000	90213	1500
0.039	6.0 × 14.5 (17.5) × 19.0	1.3	41393	2000	90262	1500
0.047	7.0 × 15.5 (18.5) × 19.0	1.4	41473	2000	90214	1250
0.056	7.5 × 16.0 (19.0) × 19.0	1.6	41563	2000	90226	1000
0.068	8.0 × 16.5 (19.5) × 19.0	1.8	41683	2000	90234	1000
0.082	8.5 × 17.0 (20.0) × 19.0	2.1	41823	1000	90263	900

Polyester Film Capacitors
KT Radial Epoxy Lacquered Type

Vishay BCcomponents



 $U_{Rdc} = 400 \text{ V}$; $U_{Rac} = 125 \text{ V}$; $U_{p-p} = 350 \text{ V}$

C (μF)	DIMENSIONS wmax × Hmax × Lmax (mm)	MASS (g)	CATALOG NUMBER 2222 347 AND PACKAGING			
			LOOSE IN BOX; It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ	C-tol = ± 10 %	SPQ
			LAST 5 DIGITS OF CATALOG NUMBER		LAST 5 DIGITS OF CATALOG NUMBER	
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm					lock lead	
0.0047 0.0056 0.0068 0.0082	5.5 × 13.0 (16.0) × 13.5	0.7	51472	2000	90237	1250
			51562		90267	
			51682		90268	
			51822		90269	
0.01	6.0 × 13.5 (16.5) × 13.5	0.7	51103	2000	90218	2000
0.012	6.5 × 14.0 (17.0) × 13.5	0.8	51123	2000	90221	1750
0.015	7.0 × 14.5 (17.5) × 13.5	0.9	51153	2000	90219	1750
Pitch = 15.0 ± 0.4 mm; d _t = 0.80 ± 0.08 mm					lock lead	
0.018	5.5 × 14.0 (17.0) × 19.0	1.1	51183	2000	90222	1500
0.022	6.0 × 14.5 (17.5) × 19.0	1.2	51223	2000	90223	1500
0.027	7.0 × 15.5 (18.5) × 19.0	1.4	51273	2000	90232	1250
0.033	7.5 × 16.0 (19.0) × 19.0	1.6	51333	2000	90227	1000
0.039	8.0 × 16.5 (19.5) × 19.0	1.8	51393	2000	90228	1000
0.047	8.5 × 17.0 (20.0) × 19.0	2.1	51473	1000	90229	900

 $U_{Rdc} = 630 \text{ V}$; $U_{Rac} = 200 \text{ V}$; $U_{p-p} = 560 \text{ V}$

C (μF)	DIMENSIONS wmax × Hmax × Lmax (mm)	MASS (g)	CATALOG NUMBER 2222 347 AND PACKAGING			
			LOOSE IN BOX; It = 4.0 + 1.0/- 0.5 mm			
			C-tol = ± 10 %	SPQ	C-tol = ± 10 %	SPQ
			LAST 5 DIGITS OF CATALOG NUMBER		LAST 5 DIGITS OF CATALOG NUMBER	
Pitch = 10.0 ± 0.4 mm; d _t = 0.60 ± 0.06 mm					lock lead	
0.001 0.0012 0.0015 0.0018 0.0022 0.0027 0.0033 0.0039	5.5 × 13.0 (16.0) × 13.5	0.7	61102	2000	90276	1250
61122			90277			
61152			90278			
61182			90279			
61222			90281			
61272			90282			
61332			90283			
61392			90284			
0.0047	6.0 × 13.5 (16.5) × 13.5	0.7	61472	2000	90285	2000
0.0056	6.5 × 14.0 (17.0) × 13.5	0.8	61562	2000	90286	1750
0.0068	7.0 × 14.5 (17.5) × 13.5	0.9	61682	2000	90287	1750
Pitch = 15.0 ± 0.4 mm; d _t = 0.80 ± 0.08 mm					lock lead	
0.0082	5.5 × 14.0 (17.0) × 19.0	1.1	61822	2000	90288	1500
0.01	6.0 × 14.5 (17.5) × 19.0	1.2	61103	2000	90289	1500
0.012	7.0 × 15.5 (18.5) × 19.0	1.3	61123	2000	90291	1250
0.015	7.5 × 16.0 (19.0) × 19.0	1.5	61153	2000	90292	1000
0.018	8.0 × 16.5 (19.5) × 19.0	1.7	61183	2000	90293	1000
0.022	8.5 × 17.0 (20.0) × 19.0	2.0	61223	1000	90294	900

CAPACITANCE

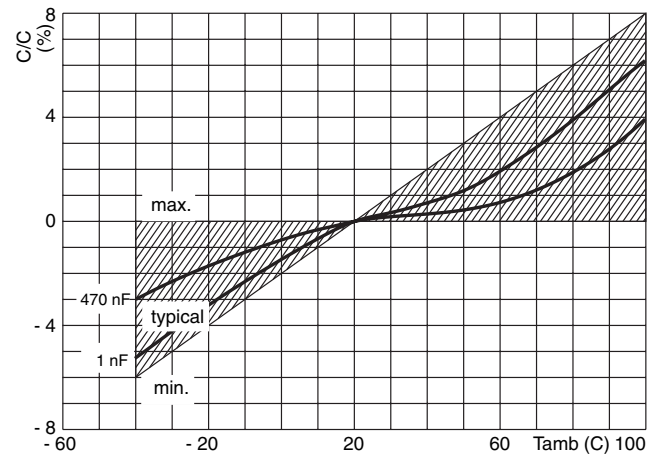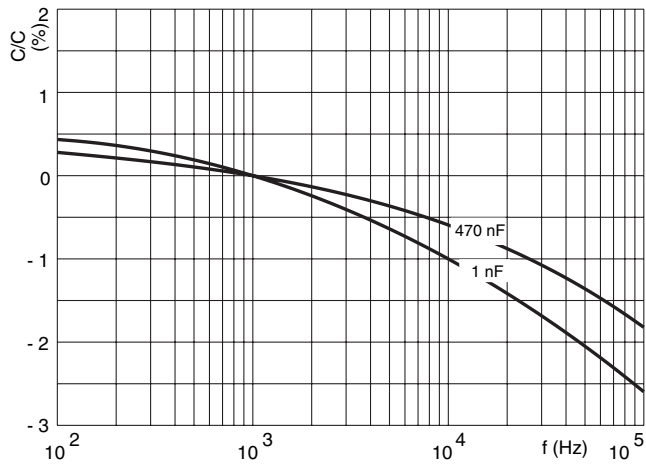



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.