



R13-130.136




Screw Type

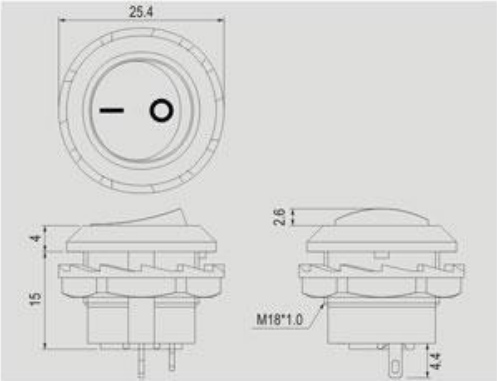

|                           |
|---------------------------|
| Rating                    |
| 10A 125V AC<br>6A 250V AC |
| Contact resistance        |
| 50mΩ Max                  |
| Insulation resistance     |
| DC 500V 100MΩ Min         |
| Dielectric strength       |
| AC 1500V 1 minute         |
| Cut-out for R13-130, 136  |




|                    |
|--------------------|
| 6 mm max           |
| Cut-out for R13-49 |



R13-49



Screw Type

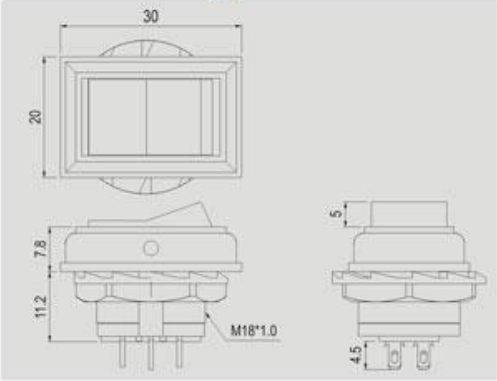

FEATURES

- \* MATERIAL: Actuators are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- \* Phenolic base.
- \* Mounted by nut.

R13-

| ROCKER    | FUNCTION         | TERMINAL |
|-----------|------------------|----------|
| 1 3 0<br> | A<br><br>2P SPST | 0 5 SO   |
| 1 3 6<br> | B<br><br>6P DPDT |          |
| 4 9<br>   | C<br><br>3P SPDT |          |

