


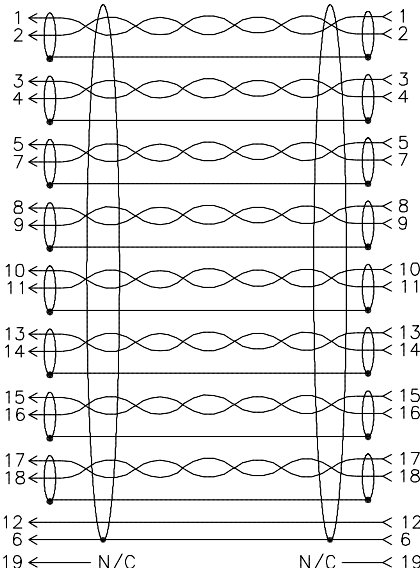


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = WHITE/RED 6 = DRAIN 7 = RED/WHITE 8 = WHITE/ORANGE 9 = ORANGE/WHITE 10 = WHITE/BLUE	 11 = BLUE/WHITE 12 = GREEN/YELLOW 13 = WHITE/BROWN 14 = BROWN/WHITE 15 = WHITE/YELLOW 16 = YELLOW/WHITE 17 = WHITE/VIOLET 18 = VIOLET/WHITE 19 = N/C		CONTACT CARRIER MATERIAL	NYLON or PBT
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)
			RATED VOLTAGE [V]	150 V
			OUTER JACKET MATERIAL/COLOR	EX60/BLACK
			CONDUCTOR INSULATION MATERIAL	XLPE
			NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
			DRAIN/SHIELD	9x22 AWG/ALUM.-POLYESTER FOIL (PAIRS & OVERALL)
			CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIRS W/DRAIN, 1 GND, 1 DRAIN
			TEMPERATURE RANGE	-60°C to +105°C (-76°F to +221°F)
			PROTECTION CLASS	IEC IP67
			CABLE RATINGS	UL: ITC-ER/PLTC-ER, 105°C, Direct Burial, 105°C; -60°C COLD BEND CSA: CIC, 90°C, 300V; -60°C COLD BEND UL 1309 MARINE SHIPBOARD 300V; ABS CERTIFIED; IEEE 1202/FT4; IEEE 1580; IEC 60332-3-22

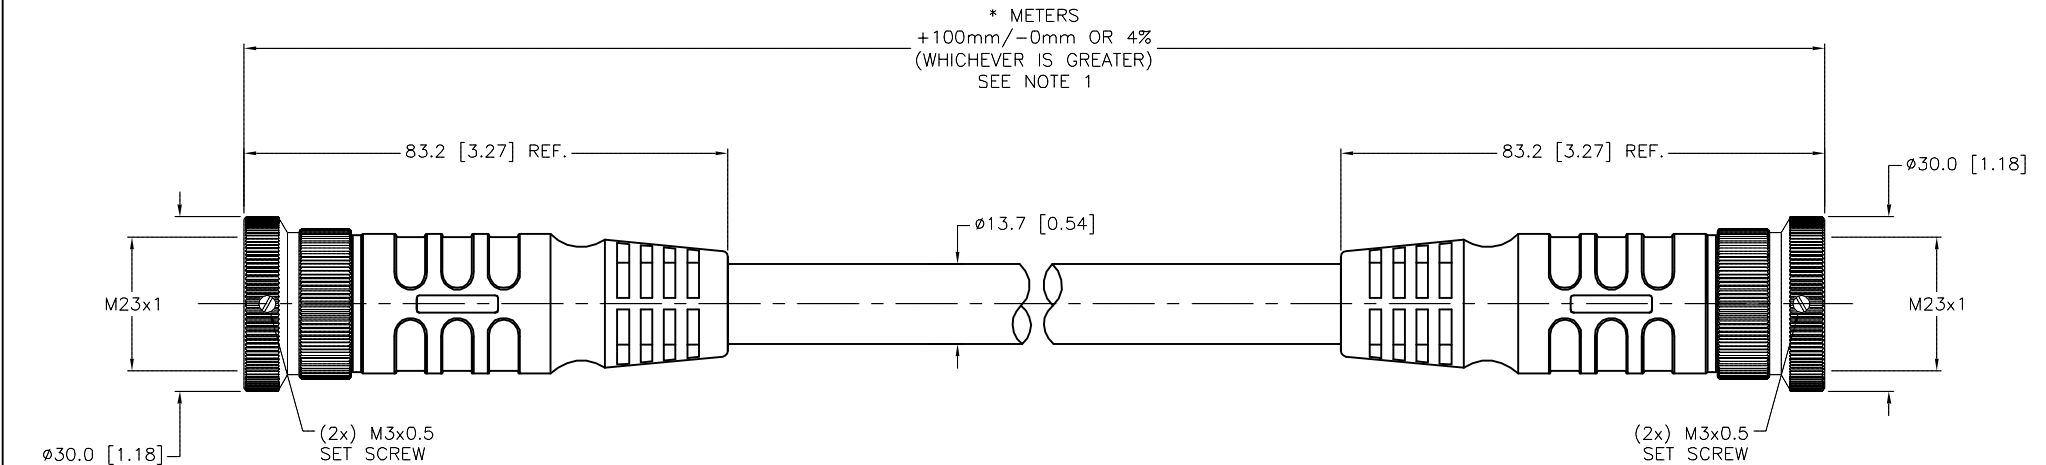

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "★" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS				FINISH SEE SPECIFICATIONS		DRFT RDS APVD J.S.		DATE 02/06/15 SCALE 1=1.3		DESCRIPTION P-CSMT CKMT 19-1484XL-*	
C UPDATED CABLE RATINGS PER ECO				TV 08/10/16 55568		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	
REV DESCRIPTION				BY DATE ECO NO.		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777034659	
										SHEET 1 OF 1	