


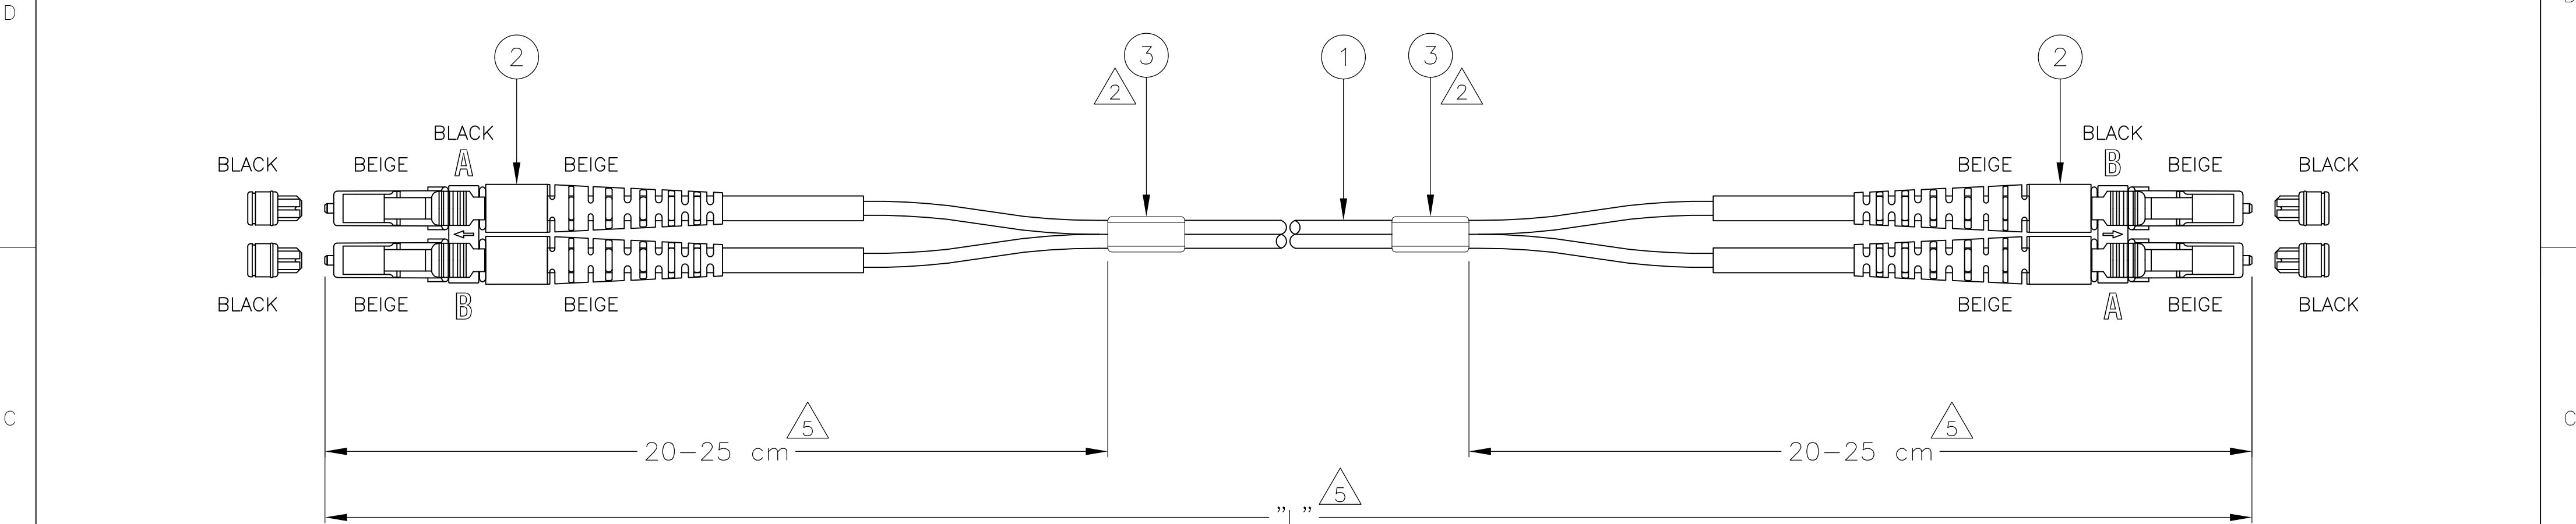

LC CONN. SIDE MARK		LC CONN. SIDE MARK
A	↔	B
B	↔	A

NOTES:

- 1ATTENUATION ≤ 0.3 dB, MEASURED AT 1300 nm
ACC. TO I.E.C. 61300-3-4 METHOD B
- 2BLANK LABEL
- 3FILLED OUT TEST RESULT SHEET SUPPLIED
WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 4CABLE INFORMATION:

— CORE DIAMETER:50/125 μm

— OUTER JACKET DIAMETER:1.8x3.6 mm

— OUTER JACKET COLOUR:ORANGE

— OUTER JACKET MATERIAL:LSZH

5FOR LENGTHS < 60 cm SHORTER SLIT LENGTHS APPLY

6ADDITIONAL ATTENUATION FOR LONG LEADS
ACC. TO CUSTOMER DRAWING 1920435

7DELIVERED ON A REEL IN A BOX

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-6536502-Y	XY.0
8-6536502-1	100.0 -0/+5
8-6536502-2	300 -0/+15
9-6536502-0	0.5 -0/+0.1

2	BLANK LABEL	3
2	LC DUPLEX CONNECTOR, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 50/125, ORANGE LSZH	1
Qty	Description	Item
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DWN: R. COOLEN 01AUG2007 CHK: A. HENGELMOLEN 10AUG2007 APVD: A. HENGELMOLEN 10AUG2007 PRODUCT SPEC: — APPLICATION SPEC: — WEIGHT: —		Tyco Electronics Corporation 's-Hertogenbosch, Nederland
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH: —		NAME: FOMM50 LEAD 1.8MZ LC/PC - LC/PC DUPLEX
MATERIAL: —		SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-6536502 RESTRICTED TO: —
CUSTOMER DRAWING		SCALE: NTS SHEET: 1 of 1 REV: J